

## Typical Examples Of Select Encoder Applications

### Pitch Control


#### Model MA36S

- IP67 Sealing
- Standard Size 36 mm Package
- SSI and CANopen Communications
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- Proven New Turns Counting Technology - No Gears or Batteries



#### Model MA36H


- IP67 Sealing
- Durable Magnetic Technology
- Standard Size 36 mm Package
- SSI and CANopen Communications
- Flex Mount Eliminates Couplings - Ideal for Motors or Shafts
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- Proven New Turns Counting Technology - No Gears or Batteries



### Azimuth (Yaw) Control


#### Model MA63S

- Bearing Load of 80 lbs.
- Durable Magnetic Technology
- SSI and CANopen Communications
- Standard Size 63 mm (2.5") Package
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- Proven New Turns Counting Technology - No Gears or Batteries



#### Model MA36S/H

- Durable Magnetic Technology
- Standard Size 36 mm Package
- SSI and CANopen Communications
- Flex Mount Eliminates Couplings - Ideal for Motors or Shafts
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- Proven New Turns Counting Technology - No Gears or Batteries

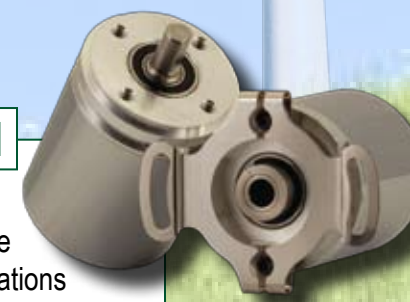

#### Model 702

- Up to 30,000 CPR
- IP67 Sealing Available
- Flange, Servo Mounting
- Standard Size 20 Package (2" x 2")
- 100° C Operating Temperature Option
- 80 lb Max. Axial and Radial Shaft Loading



#### Model 725

- Standard Size 25 Package (2.5" x 2.5")
- 100° C Operating Temperature Option
- Standard and Industrial Housings
- Servo and Flange Mounting
- IP67 Sealing Available
- Up to 30,000 CPR



### Rotational Speed Control

#### Model 25T

- 2.5" Opto-ASIC Encoder, Low Profile (2.0")
- Standard Bore Sizes from 0.625" to 1.125"
- Metric Bore Sizes from 6 mm to 28 mm
- 105° C Operating Temperature Option
- Versatile Flexible Mounting Options
- Resolutions to 10,000 CPR
- RoHS Compliant




#### Model 775

- 100° C Operating Temperature Option
- Thru-Bore Design for Mounting Ease
- Incorporates Opto-ASIC Technology
- Resolutions to 4096 CPR
- Bore Options to 1.375"
- CE Marking Available



#### Model 776

- Incorporates Opto-ASIC Technology
- Slim Profile - 1.36" In Depth
- Bore Options to 1.875"
- Resolutions to 4096 CPR
- CE Marking Available
- Thru-Bore Design

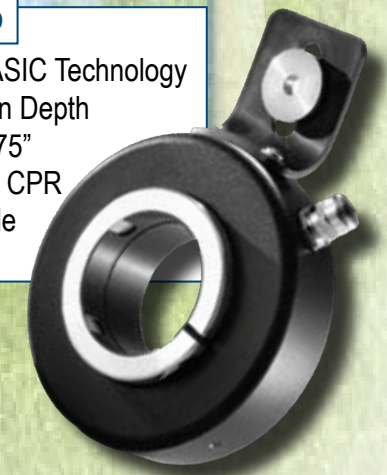



**Superior Design**



- First To Use Opto-ASIC Technology
- Creators Of The First Cube Encoder
- Creators Of The Original Tru-Trac™

**Customer Service**



A Helpful Customer Service Representative Is Available From 5:00 am To 4:30 pm Pacific Time

**Exceptional Value**



We've Done Our Homework There Is No Better Encoder On The Market For The Price!

**Quick Delivery**



- Standard Delivery In 3 To 7 Business Days
- Expedite Delivery Available

**3 Year Warranty**



The Best In The Industry!

**World Headquarters  
Americas Division**

Encoder Products Company  
464276 Highway 95  
PO Box 249  
Sagle, Idaho 83860  
USA  
ISO 9001:2008 Certified  
RoHS/REACH/WEEE Compliance

**Europe Division**

British Encoder Products Company  
Whitegate Industrial Estate, Unit 33  
Wrexham, Clwyd  
Wales LL13 8UG  
United Kingdom  
ISO 9001:2008 Certified

**Asia Division**

Zhuhai Precision Encoder Co., LTD  
Rm. 308C, 3 / F,  
Zhongdian Building  
No. 1082, JiuZhou Ave.  
Ji Da District, Zhuhai City  
Guangdong Province, PRC  
519015



Wind Power Solutions



\*Trademark of Encoder Products Company

May 2012

**ACCUCODER™**  
by Encoder Products Company