

# 2515A-G

Maxi-Gap™ Industrial



Extra Wide Gap Magnetic Contact

## Installation Instructions



Mount the contact and magnet so that both labels read in the same direction and the mounting holes are parallel to one another. To ensure maximum operating gap, MaxiGap distance, the magnet should not be mounted more than 3 inches away from the contact. If the magnet is mounted 1 inch away from the contact and is offset by 1 inch, either in front or back of the contact, the unit will maintain a vertical gap distance of 6 inches. If the magnet is mounted 2 inches from the contact and is offset by 1 inch, either in front or back of the contact, the unit will maintain a vertical gap distance of 4 inches.

**CAUTION** Due to extreme gap distances, the unit should be mounted at a minimum height of 36 inches from the floor to prevent attempts to compromise the unit.

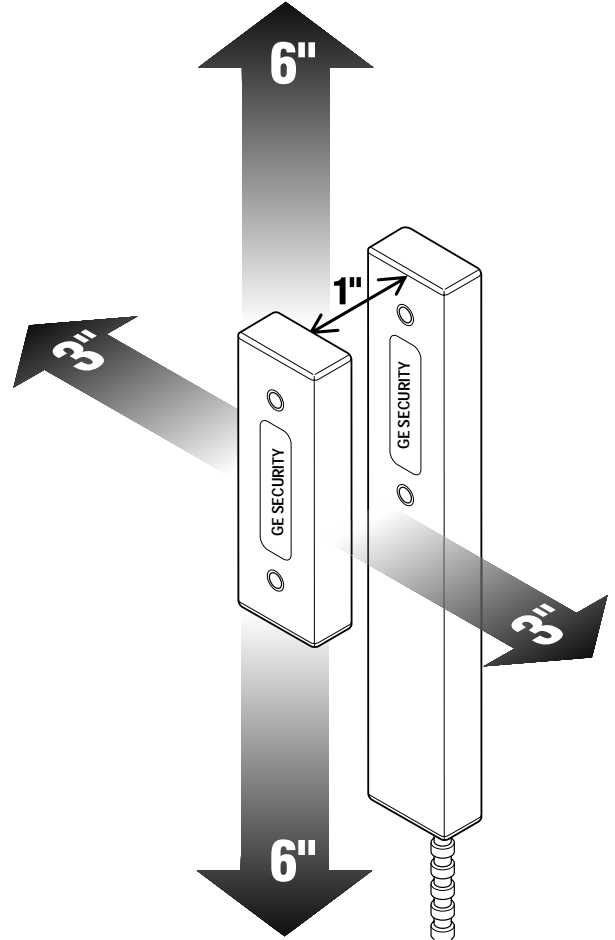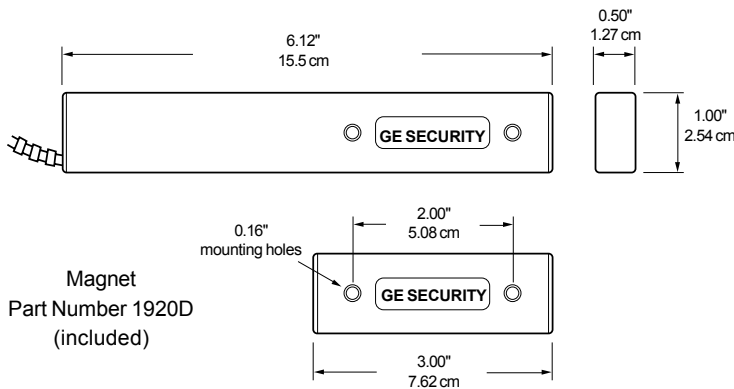

## Ordering Information

Model Number	Loop Type Configuration	Electrical Gap Distance (Make)*	Lead Type	Listing
2515A-G	ClosedNOUp to 6"		1.5' stainless steel armored cable	UL

\* Gap distances are nominal make distance 20%.  
European Union Specification: 48 V AC/DC max., 0.5 A

**Form A: 2515A**  
Voltage: 100 V AC/DC max.  
Current: 0.5 A max.  
Power: 7.5 W max.  
Lead: Use black leads

