







Heavy duty switch terminal blocks with blade

Compression clamp


 **DIN 1 - DIN 3**

- End stop  th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop  th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail  35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail  35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail  35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail  32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

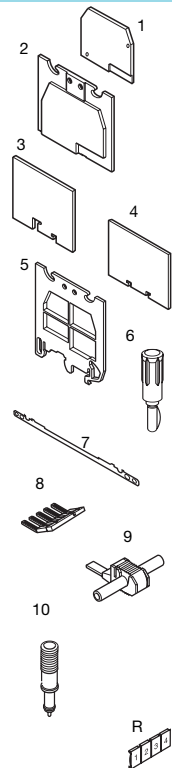


- 1** End section grey orange beige
- 2** Separator end section (block) grey blue beige
- 3** Separator end section (rail) grey
- 4** Separator end section grey
- 5** Separator end section grey
- 6** Test plug
- 7** Shield connector
- 8** Comb type jumper bar 35 A
- 9** IDC jumper
- 10** Test device


R See section on markers marking method

MA 2,5/5.SNB

Spacing 5 mm (.200")





5 mm block - Switch connection by short blade

Color	Type	Part numbers
Grey / Grey	 MA 2,5/5.SNB	0115 504.15

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA NRTL/C
Compression Solid wire	0,5-4 mm ²	22-12 AWG	22-12 AWG
clamp Stranded wire	0,5-2,5 mm ²	22-12 AWG	22-12 AWG


Voltage			
Rated	320 V	150 V	150 V
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated / Gauge	2,5 mm ² / A3	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
10 mm .39"	3,5 mm .138"	0,4-0,6 Nm 3.5-5.3 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM6 th. 2,8 mm	0118 368.16
SCF6 th. 3,0 mm	0118 707.03
SCF6 th. 3,0 mm	0128 707.05
SCF6 V0 V0 th. 3,0 mm	0198 707.04
SCFM6 th. 3,0 mm	0114 825.05
SCFEX1 (1)  th. 2,4 mm	0103 619.04
SCFEX3 (1)  th. 2,4 mm	0103 620.01
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15


(10) Sides of block (6) RC510 on blade
Note : (1) End sections and separators snapped on rails.

MA 2,5/5.SNBT

Spacing 5 mm (.200")





5 mm block - Switch connection by short blade - Equipped with two test sockets DIA. 2 mm / .079"

Color	Type	Part numbers
Grey / Grey	 MA 2,5/5.SNBT	0115 509.22

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA NRTL/C
Compression Solid wire	0,5-4 mm ²	24-12 AWG	24-12 AWG
clamp Stranded wire	0,5-2,5 mm ²	24-12 AWG	24-12 AWG


Voltage			
Rated	320 V	150 V	150 V
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated / Gauge	2,5 mm ² / A3	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
10 mm .39"	3,5 mm .138"	0,4-0,6 Nm 3.5-5.3 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM6 th. 2,8 mm	0118 368.16
SCF6 th. 3,0 mm	0118 707.03
SCF6 th. 3,0 mm	0128 707.05
SCF6 V0 V0 th. 3,0 mm	0198 707.04
SCFM6 th. 3,0 mm	0114 825.05
SCFEX1 (1)  th. 2,4 mm	0103 619.04
SCFEX3 (1)  th. 2,4 mm	0103 620.01
FC2 DIA. 2,0 mm	0007 865.26
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15

(10) Sides of block (6) RC510 on blade

MA 2,5/5.SNBTA


Spacing 5 mm (.200")



5 mm block - Switch connection by short blade - Equipped with two test sockets DIA. 2,3 mm / .090"

M 4/6.SNBT...


Spacing 6 mm + 0,05 (.238")



6 mm block - Switch connection by short blade - Equipped with two test sockets DIA. 2 mm / .079"

M 4/6.SNB

Spacing 6 mm + 0,05 (.238")



6 mm block - Switch connection by long blade

Color	Type	Part numbers
Grey / Grey	MA 2,5/5.SNBTA	0115 505.16

Color	Type	Part numbers
Grey / Grey	M 4/6.SNBT1	0115 438.12
Grey / Beige V0	M 4/6.SNBT2	0115 441.15

Color	Type	Part numbers
Grey / Grey	M 4/6.SNB	0115 686.13
Orange/Orange	M 4/6.SNB	0105 053.22
Beige V0/Beige	M 4/6.SNB.V0	0195 686.14

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²		24-12 AWG	24-12 AWG
clamp Stranded wire	0,5-4 mm ²		24-12 AWG	24-12 AWG

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²		22-10 AWG	
clamp Stranded wire	0,5-4 mm ²		22-10 AWG	

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²		22-10 AWG	20-12 AWG
clamp Stranded wire	0,5-2,5 mm ²		22-10 AWG	20-12 AWG

Voltage

Rated	320 V	600 V	150 V
Pulse	4 kV		
Pollution degree	3		

Voltage

Rated	320 V	300 V	
Pulse	4 kV		
Pollution degree	3		

Voltage

Rated	400 V	300 V	300 V
Pulse	4 kV		
Pollution degree	3		

Current

Rated	10 A	15 A	10 A
-------	------	------	------

Current

Rated	10 A	10 A	
-------	------	------	--

Current

Rated	10 A	10 A	10 A
-------	------	------	------

Wire size

Rated / Gauge	4 mm ² / A3	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
10 mm .39"	3,5 mm .16"	0,4-0,6 Nm 3,5-5,3 lb.in	IP 20 NEMA 1

Wire size

Rated / Gauge	4 mm ² / A4	10 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374"	4 mm .157"	0,5-0,6 Nm 4,4-5,3 lb.in	IP 20 NEMA 1

Wire size

Rated / Gauge	2,5 mm ² / A4	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .37"	4 mm .16"	0,5-0,6 Nm 4,4-5,3 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16
SCF6	th. 3,0 mm 0118 707.03
SCF6 V0	th. 3,0 mm 0128 707.05
SCF6 V0	th. 3,0 mm 0198 707.04
SCFM6	th. 3,0 mm 0114 825.05
SCFEX1 (1)	th. 2,4 mm 0103 619.04
SCFEX3 (1)	th. 2,4 mm 0103 620.01
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

Type	Part numbers
FEM62	th. 3 mm 0114 994.07
SCFM6	th. 3 mm 0114 825.05
SCFEX1 (1)	th. 2,4 mm 0103 619.04
SCFEX3 (1)	th. 2,4 mm 0103 620.01
FC2	DIA. 2 mm 0007 865.26
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15
PC61	10 poles 0163 311.22
AD2,5	0114 205.20

Type	Part numbers
FEM62	th. 3 mm 0114 994.07
FEM62	th. 3 mm 0103 612.25
FEM62 V0	th. 3 mm 0194 994.00
SCFM6	th. 3 mm 0114 825.05
SCFEX1 (1)	th. 2,4 mm 0103 619.04
SCFEX3 (1)	th. 2,4 mm 0103 620.01
FC2	DIA. 2 mm 0007 865.26
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15
PC61	10 poles 0163 311.22
AD2,5	0114 205.20
DCJ	yellow 0173 059.03

(10) Sides of block (6) RC510 on blade
Note : (1) End sections and separators snapped on rails.

(11) Sides of block (6) RC810 on blade

(11) Sides of block

Heavy duty switch terminal blocks with blade


Compression clamp

DIN 1 - DIN 3



M 4/6.SNBT...


Spacing 6 mm + 0,05 (.238")



M 4/6.SNB equipped with two test socket screws DIA. 2 mm / .079" (SNBT4). 6 mm block : switch connection by long blade equipped with two test socket screws DIA. 2,3 mm / .090" (SNBT23).

M 6/8.SNB

Spacing 8 mm - 0,05 (.315")



8 mm block - switch connection by long blade

End stop	th. 9,1 mm	BADL	V0	0199 408.02
End stop	th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail	32 x 15	PR1Z2		0163 050.04
Other rails : See Accessories section				

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

	1 End section	grey orange beige	FEM62	th. 3 mm	0114 994.07
	2 Separator end section (rail)	grey	SCFM6	th. 3 mm	0114 825.05
	3 Separator end section	grey	SCFEX1 (1)	th. 2,4 mm	0103 619.04
	4 Separator end section	grey	SCFEX3 (1)	th. 2,4 mm	0103 620.01
	5 Test device				
	6 Test plug		FC2	DIA. 2 mm	0007 865.26
	7 Comb type jumper bar		PC61	35 A 10 poles	0163 311.22
	8 IDC jumper		AD2,5		0114 205.20
	9 Shield connector		CBM5	th. 0,5 mm	0178 745.14
			CBM8	th. 0,8 mm	0178 746.15
	R See section on markers marking method				



Color	Type	Part numbers
Grey / Grey	M 4/6.SNBT4	0115 687.14
Orange/Orange	M 4/6.SNBT4	0105 054.23
Grey / Grey	M 4/6.SNBT23	0115 495.04

Color	Type	Part numbers
Grey / Grey	M 6/8.SNB	0115 688.25
Orange/Orange	M 6/8.SNB	0105 055.24
Beige V0/White	M 6/8.SNB V0	0195 688.26

Characteristics

Wire size	Wire size			
	IEC	DIN	UL	CSA
Compression Solid wire	0,5-4 mm ²		22-10 AWG	
clamp Stranded wire	0,5-4 mm ²		22-10 AWG	

Characteristics

Wire size	Wire size			
	IEC	DIN	UL	CSA
Compression Solid wire	0,5-10 mm ²		22-10 AWG	20-12 AWG
clamp Stranded wire	0,5-6 mm ²		22-10 AWG	20-12 AWG

Voltage			
Rated	320 V	300 V	
Pulse	4 kV		
Pollution degree	3		

Current			
Rated	10 A	10 A	

Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	
Wire stripping length	Recomm. screwdriver 4 mm .157"	Recomm. torque 0.5-0.6 Nm 4.4-5.3 lb.in	Protection IP 20 (2) NEMA 1

Voltage			
Rated	400 V	300 V	300 V
Pulse	4 kV		
Pollution degree	3		

Current			
Rated	15 A	20 A	10 A

Wire size			
Rated / Gauge	6 mm ² / A5	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver 4-5 mm .16"- .20"	Recomm. torque 0,8-1 Nm 7.1-8.9 lb.in	Protection IP 20 NEMA 1

Type	Part numbers
FEM8	th. 3 mm 0113 373.26
FEM8	th. 3 mm 0103 230.02
FEM8 V0	th. 3 mm 0193 373.27
SCFM6	th. 3 mm 0114 825.05
SCFEX1 (1)	th. 2,4 mm 0103 619.04
SCFEX3 (1)	th. 2,4 mm 0103 620.01
DCO	orange 0173 060.00
FC2	DIA. 2 mm 0007 865.26
PC8	50 A 2 poles 0116 538.17
PC8	50 A 3 poles 0116 539.10
PC8	50 A 4 poles 0116 540.25
PC8	50 A 10 poles 0163 313.24
AD2,5	0114 205.20

Type	Part numbers
FEM8	th. 3 mm 0113 373.26
FEM8	th. 3 mm 0103 230.02
FEM8 V0	th. 3 mm 0193 373.27
SCFM6	th. 3 mm 0114 825.05
SCFEX1 (1)	th. 2,4 mm 0103 619.04
SCFEX3 (1)	th. 2,4 mm 0103 620.01
DCO	orange 0173 060.00
FC2	DIA. 2 mm 0007 865.26
PC8	50 A 2 poles 0116 538.17
PC8	50 A 3 poles 0116 539.10
PC8	50 A 4 poles 0116 540.25
PC8	50 A 10 poles 0163 313.24
AD2,5	0114 205.20

(11) Sides of block

Note : (1) End sections and separators snapped on rails.
(2) Connection tightened with or without wire.

(11) (17) Sides of block

Switch terminal blocks with blade

Compression clamp


DIN 1 - DIN 3

End stop	th. 9,1 mm	BADL	V0	0199 408.02
End stop	th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail	32 x 15	PR1Z2		0163 050.04
Other rails : See Accessories section				

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

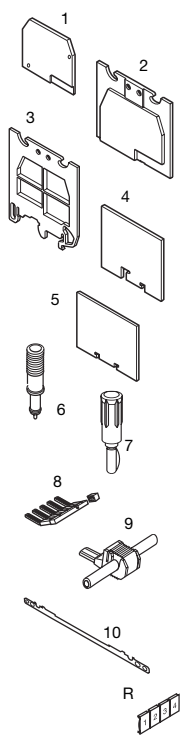


1	End section	grey	FEM6	th. 2,8 mm	0118 368.16
		orange	FEM6	th. 2,8 mm	0103 126.16
		blue	FEM6	th. 2,8 mm	0128 368.10
2	Separator end section (block)	grey	SCF6	th. 3 mm	0118 707.03
3	Separator end section (rail)	grey	SCFM6	th. 3 mm	0114 825.05
4	Separator end section	grey	SCFEX1	th. 2,4 mm	0103 619.04
5	Separator end section	grey	SCFEX3	th. 2,4 mm	0103 620.01
6	Test device		DCJ	yellow	0173 059.03
7	Test plug		FC2 (1)	DIA. 2 mm	0007 865.26
8	Comb type jumper bar		PC61	35 A	0163 311.22
9	IDC jumper		AD2,5	24 A	0114 205.20
10	Shield connector		CBM5	th. 0,5 mm	0178 745.14
			CBM8	th. 0,8 mm	0178 746.15

R See section on marking method

M 4/6.SN...


Spacing 6 mm + 0,05 (.238")



6 mm block - Switch connection by blade

M 4/6.SNT

Spacing 6 mm + 0,05 (.238")



M 4/6.SN equipped with two test socket screws DIA. 2 / .079"



Color	Type	Part numbers
Grey / Orange	M 4/6.SN	0115 214.11
Red / Orange	M 4/6.SN	0105 134.10
Blue / Orange	M 4/6.SN	0125 214.13
Orange / Orange	M 4/6.SN2	0105 022.13
Grey / Grey	M 4/6.SN3	0115 404.11

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA
Compression Solid wire	0,5-4 mm ²	22-10 AWG	20-12 AWG
clamp Stranded	0,5-4 mm ²	22-10 AWG	20-12 AWG
wire			

Voltage			
Rated	400 V	600 V	300 V
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,8 Nm 4,4-7 lb.in	IP 20 NEMA 1



Color	Type	Part numbers
Grey / Orange	M 4/6.SNT	0115 215.12

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA
Compression Solid wire	0,5-4 mm ²	22-10 AWG	20-12 AWG
clamp Stranded	0,5-4 mm ²	22-10 AWG	20-12 AWG
wire			

Voltage			
Rated	400 V	600 V	300 V
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,6 Nm 4,4-5,3 lb.in	IP 20 NEMA 1

Accessories

Accessories

Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16
FEM6	th. 2,8 mm 0103 126.16
FEM6	th. 2,8 mm 0128 368.10
SCF6	th. 3 mm 0118 707.03
SCFM6	th. 3 mm 0114 825.05
SCFEX1	th. 2,4 mm 0103 619.04
SCFEX3	th. 2,4 mm 0103 620.01
DCJ	yellow 0173 059.03
FC2 (1)	DIA. 2 mm 0007 865.26
PC61	35 A 10 poles 0163 311.22
AD2,5	24 A 0114 205.20
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16
SCF6	th. 3 mm 0118 707.03
SCFM6	th. 3 mm 0114 825.05
SCFEX1	th. 2,4 mm 0103 619.04
SCFEX3	th. 2,4 mm 0103 620.01
FC2	DIA. 2 mm 0007 865.26
PC61	35 A 10 poles 0163 311.22
AD2,5	24 A 0114 205.20
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

(10) Sides of block
Note : (1) For block equipped with DCJ.

(11) Sides of block

Heavy duty switch terminal blocks with blade

Compression clamp


DIN 1 - DIN 3

- End stop th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section*
- Rail 35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail 35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail 35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail 32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section*

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

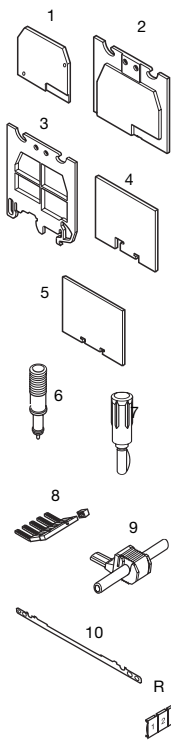


- 1** End section grey orange
- 2** Separator end section (block) grey
- 3** Separator end section (rail) grey
- 4** Separator end section grey
- 5** Separator end section grey
- 6** Test device
- 7** Test plug
- 8** Comb type jumper bar
- 9** IDC jumper
- 10** Shield connector

R See section on markers marking method

M 4/6.SNTA


Spacing 6 mm + 0,05 (.238")



M 4/6.SN equipped with two test sockets screws DIA. 2,3 mm / .091"

M 6/8.SN...

Spacing 8 mm - 0,05 (.315")



8 mm block - switch connection by blade

Color	Type	Part numbers	Color	Type	Part numbers
Grey / Orange	M 4/6.SNTA	0115 466.16	Grey / Orange	M 6/8.SN	0115 235.16
			Orange / Orange	M 6/8.SN2	0105 023.14
			Grey / Grey	M 6/8.SN3	0115 405.12

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²			20-12 AWG
clamp Stranded wire	0,5-4 mm ²			20-12 AWG

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-10 mm ²			22-8 AWG
clamp Stranded wire	0,5-6 mm ²			22-8 AWG

Voltage				Voltage			
Rated	400 V			Rated	400 V	600 V	
Pulse	4 kV			Pulse	4 kV		
Pollution degree	3			Pollution degree	3		
Current				Current			
Rated	10 A		10 A	Rated	16 A	20 A	
Wire size				Wire size			
Rated / Gauge	4 mm ² / A4		12 AWG	Rated / Gauge	6 mm ² / A5	8 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374 "	4 mm .157"	0.5-0.6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1	12 mm .472 "	4-5 mm .157" - .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1

Type	Part numbers	
FEM6	th. 2,8 mm	0118 368.16
SCF6	th. 3 mm	0118 707.03
SCFM6	th. 3 mm	0114 825.05
SCFEX1	th. 2,4 mm	0103 619.04
SCFEX3	th. 2,4 mm	0103 620.01
PC61	35 A 10 poles	0163 311.22
AD2,5	24 A	0114 205.20
CBM5	th. 0,5 mm	0178 745.14
CBM8	th. 0,8 mm	0178 746.15

Type	Part numbers	
FEM8	th. 3 mm	0113 373.26
FEM8	th. 3 mm	0103 230.02
SCFM6	th. 3 mm	0114 825.05
SCFEX1	th. 2,4 mm	0103 619.04
SCFEX3	th. 2,4 mm	0103 620.01
DCO	orange	0173 060.00
FC2 (1)	DIA. 2 mm	0007 865.26
PC8	50 A 2 poles	0116 538.17
PC8	50 A 3 poles	0116 539.10
PC8	50 A 4 poles	0116 540.25
PC8	50 A 10 poles	0163 313.24
AD2,5	24 A	0114 205.20

(11) Sides of block

(11) (17) Sides of block


Heavy duty switch terminal blocks with blade Double deck

Compression clamp



M 4/6.D2.SNBT

Spacing 6 mm + 0,05 (.238")

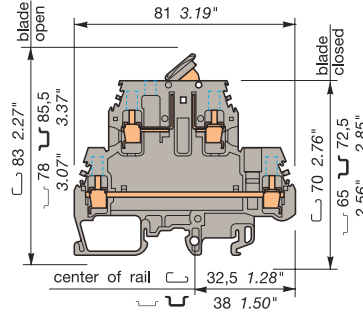

6 mm block equipped with 4 test sockets DIA. 2 mm/.079" Switch on top circuit standard connection on bottom by short blade.



Color	Type	Part numbers
Grey	M 4/6.D2.SNBT	0115 561.15

Characteristics

Wire size		IEC	UL	CSA
		NFC	DIN	
Compression Solid wire		0,5-4 mm ²	24-12 AWG	22-12 AWG
clamp Stranded wire		0,5-4 mm ²	24-12 AWG	22-12 AWG

Voltage

Rated	400 V	300 V	300 V
Pulse	4 kV		
Pollution degree	3		

Current

Rated	10 A	15 A	15 A
-------	------	------	------

Wire size

Rated / Gauge	4 mm ² / A4	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374"	4 mm .157"	0.5-0.6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1

End stop	th. 9,1 mm	BAMH	0114 836.00
<i>Other end stops : See Accessories section</i>			
Rail	35 x 7,5 x 1	PR30 prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4	0168 500.12
Rail	35 x 15 x 1,5	PR5 prepunched	0101 598.26
Rail	32 x 15	PR1Z2	0163 050.04
<i>Other rails : See Accessories section</i>			

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.




Accessories

	1 End section	FEMS6D	th. 1 mm	0116 591.05
	2 Test plug	FC2	DIA. 2 mm	0007 865.26
	3 Assembled jumper bar (without IP 20 protection)	BJM61 (1)(2) 32 A	2 poles	0173 515.11
	4 Assembled jumper bar (with IP 20 protection)	BJM61 (1)(2) 32 A	3 poles	0173 516.12
	5 Connector plate	BJM61 (1)(2) 32 A	4 poles	0173 517.13
	6 Jumper bar not assembled	BJM61 (1)(2) 32 A	5 poles	0173 519.25
	7 Screw + washer + post	BJM61 (1)(2) 32 A	10 poles	0173 520.22
	8 Pivoting jumper bar	BJMI6D (1)(2) 32 A	2 poles	0179 668.20
	9 Comb type jumper bar	BJMI6D (1)(2) 32 A	3 poles	0179 669.21
	10 IDC jumper	BJMI6D (1)(2) 32 A	4 poles	0179 670.26
	11 Shield connector	BJMI6D (1)(2) 32 A	5 poles	0179 671.13
	12 End section	BJMI6D (1)(2) 32 A	10 poles	0179 672.14
	13 Connector plate	EL6	35 A	0173 627.21
	14 Jumper bar not assembled	BJS61 (1)(2)(3) 32 A	10 poles	0168 485.27
	15 Screw + washer + post	EV6D		0168 400.16
	16 Pivoting jumper bar	BJP61	35 A	0167 225.20
	17 Comb type jumper bar	PC61	35 A	0163 311.22
	18 IDC jumper	AD2,5	24 A	0114 205.20
	19 Shield connector	CBD2S		0178 408.14
	20 End section			
	21 End section			
	22 End section			
	23 End section			
	24 End section			
	25 End section			
	26 End section			
	27 End section			
	28 End section			
	29 End section			
	30 End section			
	31 End section			
	32 End section			
	33 End section			
	34 End section			
	35 End section			
	36 End section			
	37 End section			
	38 End section			
	39 End section			
	40 End section			
	41 End section			
	42 End section			
	43 End section			
	44 End section			
	45 End section			
	46 End section			
	47 End section			
	48 End section			
	49 End section			
	50 End section			
	51 End section			
	52 End section			
	53 End section			
	54 End section			
	55 End section			
	56 End section			
	57 End section			
	58 End section			
	59 End section			
	60 End section			
	61 End section			
	62 End section			
	63 End section			
	64 End section			
	65 End section			
	66 End section			
	67 End section			
	68 End section			
	69 End section			
	70 End section			
	71 End section			
	72 End section			
	73 End section			
	74 End section			
	75 End section			
	76 End section			
	77 End section			
	78 End section			
	79 End section			
	80 End section			
	81 End section			
	82 End section			
	83 End section			
	84 End section			
	85 End section			
	86 End section			
	87 End section			
	88 End section			
	89 End section			
	90 End section			
	91 End section			
	92 End section			
	93 End section			
	94 End section			
	95 End section			
	96 End section			
	97 End section			
	98 End section			
	99 End section			
	100 End section			

(1) Sides of block (6) RC610 on blade
 Note : (1) Use of these accessories requires the user to cut out the partition. (2) For lower deck only. (3) For other pole numbers see Accessories section.

DOUBLE SWITCH TERMINAL BLOCKS WITH PULL LEVERS

Double switch blocks
M 4/6.D2.2S2
M 4/6.D2.2S2.T

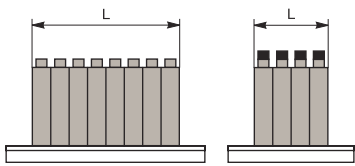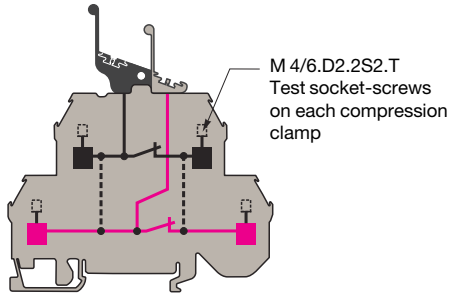



Space saving

Recommended use when the number of PLC inputs and outputs are high

2 independent switches

Interconnection between decks is possible for distribution of polarities


Change-over type blocks
M 4/6.D2.S1R
M 4/6.D2.S1R.T

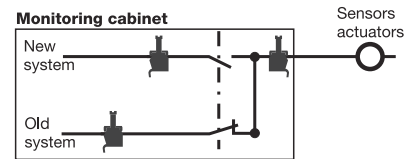


Reduces process down time when changing control system

- When wiring the new system, sensors and actuators remain connected to the old system
- No wiring mistake possible from old to new system
- Simple switching from old to new system activating the pull levers. Possibility to quickly switch to the old system if there is a start-up problem.

Bend the upper part of the lever to pull it comfortably

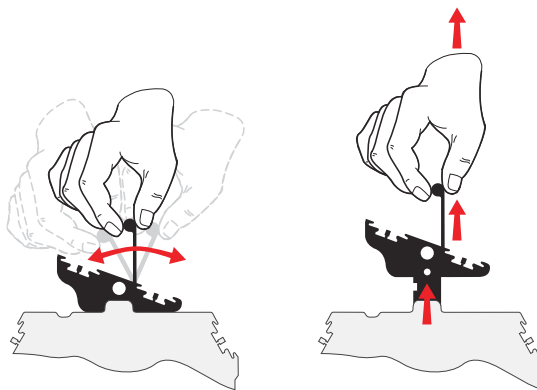


Accessories

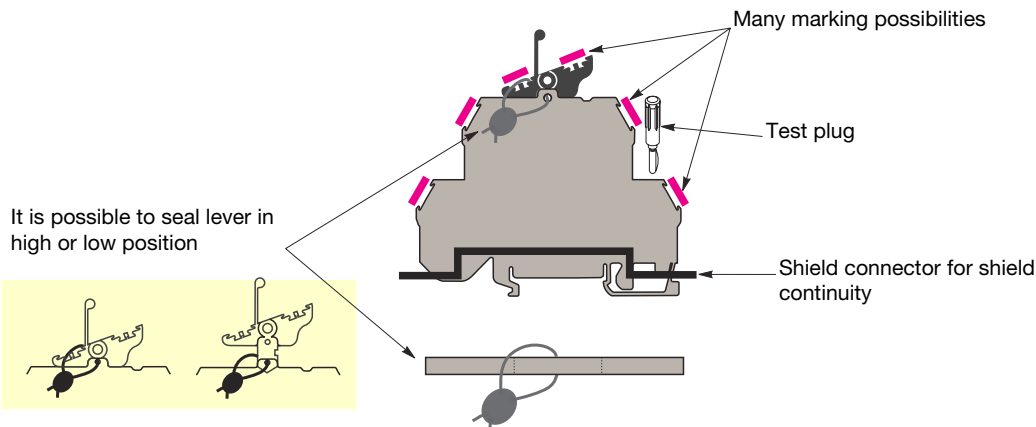


Heavy duty switch terminal blocks with contact control pull levers. Double deck double switch Compression clamp

DIN 1 - DIN 3

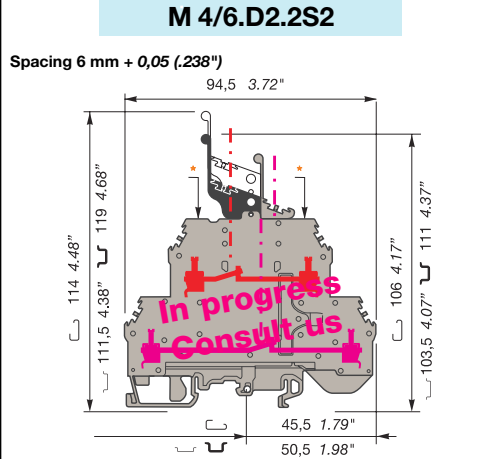

Closed block with 2 independent switching circuits. Black pull lever controls upper deck contact (black marking). Grey pull lever controls lower deck contact.

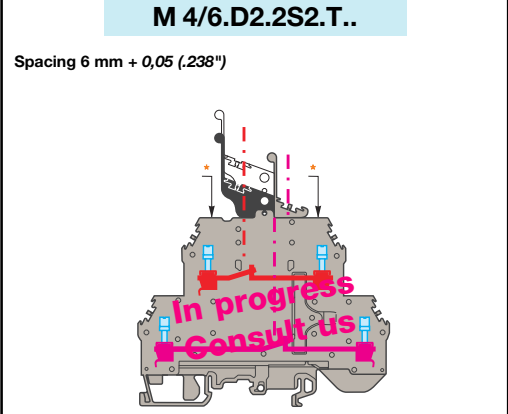

M4/6.D2.2S2 block equipped with 4 test socket-screws DIA. 2 mm or DIA. 2,3 mm.



Color	Type	Part numbers
Grey	M 4/6.D2.2S2	0199 444.25



Color	Type	Part numbers
Grey	M 4/6.D2.2S2.T	0199 448.01
Grey	M 4/6.D2.2S2.T23	0199 447.20

Characteristics

Wire size	IEC	UL	CSA
Compression Solid wire	0,2-4 mm ²	24-10 AWG	24-10 AWG
clamp Stranded wire	0,2-4 mm ²	24-10 AWG	24-10 AWG

Characteristics

Wire size	IEC	UL	CSA
Compression Solid wire	0,2-4 mm ²	24-10 AWG	24-10 AWG
clamp Stranded wire	0,2-4 mm ²	24-10 AWG	24-10 AWG

End stop	th. 9,1 mm	BAMH	0114 836.00
End stop	th. 9,1 mm	BAMH V0	0194 836.01
<i>Other end stops : See Accessories section</i>			
Rail	35 x 7,5 x 1	PR30 prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4	0168 500.12
Rail	35 x 15 x 1,5	PR5 prepunched	0101 598.26
Rail	32 x 15	PR1Z2	0163 050.04
<i>Other rails : See Accessories section</i>			

Notes

Body material UL94V0.
If another terminal block is mounted next to a block M 4/6.D2.2S2..., it must be equipped with its end section.
If a metallic part is placed beside the block, a separator end section on rail type SCFEX must be used.
The use of some accessories may decrease the voltage rating of the terminal block.
For more information, consult us.

Voltage

Rated	500 V	300 V	300 V
Pulse	6 kV		

Voltage

Rated	500 V	300 V	300 V
Pulse	6 kV		

Current

Rated	10 A	10 A	10 A
-------	------	------	------

Current

Rated	10 A	10 A	10 A
-------	------	------	------


Wire size

Rated/gauge	4 mm ² / A4	10 AWG	10 AWG
Wire stripping length	Recommended screwdriver	Recommended torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,8 Nm 4.4-7 lb.in	IP 20 NEMA 1

Wire size

Rated/gauge	4 mm ² / A4	10 AWG	10 AWG
Wire stripping length	Recommended screwdriver	Recommended torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1

Accessories

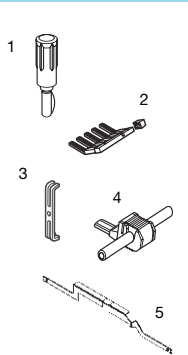


- 1 Test plug
- 2 Comb-type jumper bar
- 3 Vertical jumper bar
- 4 IDC jumper
- 5 Shield connector

Type

Type	Part number
PC6 V2 35 A 2 poles	0113 546.14
PC6 V2 35 A 3 poles	0116 536.05
PC6 V2 35 A 4 poles	0116 537.06
PC6 V2 35 A 10 poles	0113 548.26
EIP V2	0113 550.24
ITVE2 20 A	0179 825.26
AD2,5 V2 24 A	0114 205.20
CBD2S	0178 408.14

Type

Type	Part number
FC2(1) DIA.2 mm	0007 865.26
PC6 V2 35 A 2 poles	0113 546.14
PC6 V2 35 A 3 poles	0116 536.05
PC6 V2 35 A 4 poles	0116 537.06
PC6 V2 35 A 10 poles	0113 548.26
EIP V2	0113 550.24
ITVE2 20 A	0179 825.26
AD2,5 V2 24 A	0114 205.20
CBD2S	0178 408.14

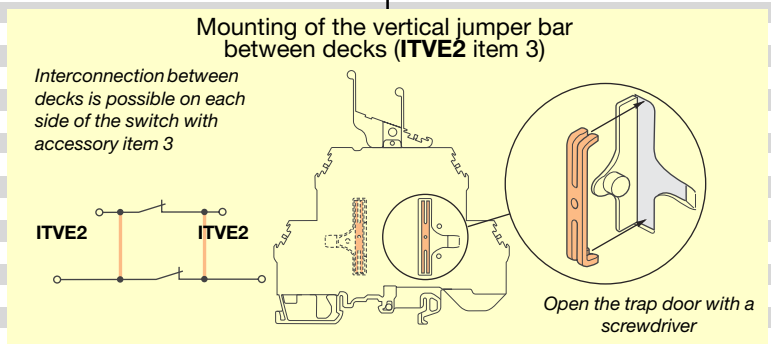

R See section on marking method

Ⓜ Block sides Ⓜ On pull levers
Note : (1) For blocks M4/6.D2.2S2.T only

Ⓜ Block sides Ⓜ On pull levers

Heavy duty switch terminal blocks with contact control pull lever. Double deck change-over type Compression clamp

DIN 1 - DIN 3

End stop	th. 9,1 mm	BAMH	0114 836.00
End stop	th. 9,1 mm	BAMH V0	0194 836.01
<i>Other end stops : See Accessories section</i>			
Rail	35 x 7,5 x 1	PR30 prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4	0168 500.12
Rail	35 x 15 x 1,5	PR5 prepunched	0101 598.26
Rail	32 x 15	PR1Z2	0163 050.04
<i>Other rails : See Accessories section</i>			

Notes


Body material UL94V0.
If another terminal block is mounted next to a block M 4/6.D2.S1R..., it must be equipped with its end section. If a metallic part is placed beside the block, a separator end section on rail type SCFEX must be used. The use of some accessories may decrease the voltage rating of the terminal block. For more information, consult us.

Accessories

	1 Test plug
	2 Comb-type jumper bar
	3 IDC jumper
	4 Shield connector
R	R See section on markers marking method

M 4/6.D2.S1R


Spacing 6 mm + 0,05 (.238")

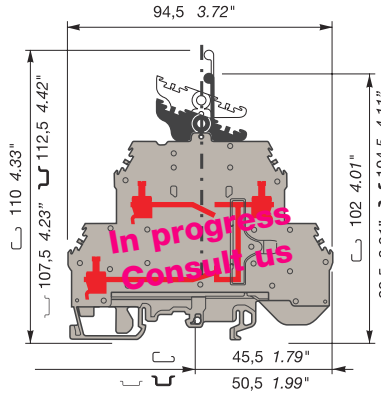

This closed block directs a signal either to the upper deck (contact control pull lever in high position), or to the lower deck (pull lever in low position) with just one operation.

M 4/6.D2.S1R.T

Spacing 6 mm + 0,05 (.238")



Block M4/6.D2.S1R equipped with 3 test socket-screws DIA. 2 mm or DIA. 2,3 mm.

--	--

Color	Type	Part numbers
Grey with black	M 4/6.D2.S1R	0199 452.25
contact control pull lever		

Color	Type	Part numbers
Grey with black	M 4/6.D2.S1R.T	0199 456.21
With 3 test socket-screws DIA. 2 mm contact control pull lever		
Grey with black	M 4/6.D2.S1R.T23	0199 455.20
With 3 test socket-screws DIA. 2,3 mm contact control pull lever		

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN	pending	pending
Compression Solid wire	0,2-4 mm ²		24-10 AWG	24-10 AWG
clamp Stranded wire	0,2-4 mm ²		24-10 AWG	24-10 AWG

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN	pending	pending
Compression Solid wire	0,2-4 mm ²		24-10 AWG	24-10 AWG
clamp Stranded wire	0,2-4 mm ²		24-10 AWG	24-10 AWG

Voltage			
Rated	500 V	300 V	300 V
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated/gauge	4 mm ² / A4	10 AWG	10 AWG
Wire stripping length	Recommended screwdriver	Recommended torque	Protection
9,5 mm .374 "	4 mm .157"	0.5-0.8 Nm 4.4-7 lb.in	IP 20 NEMA 1

Voltage			
Rated voltage	500 V	300 V	300 V
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated/gauge	4 mm ² / A4	10 AWG	10 AWG
Wire stripping length	Recommended screwdriver	Recommended torque	Protection
9,5 mm .374 "	4 mm .157"	0.5-0.6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1

Type	Part number
PC6 V2 35 A 2 poles	0113 546.14
PC6 V2 35 A 3 poles	0116 536.05
PC6 V2 35 A 4 poles	0116 537.06
PC6 V2 35 A 10 poles	0113 548.26
EIP V2	0113 550.24
AD2,5 V2 24 A	0114 205.20
CBD2S	0178 408.14

Type	Part number
FC2 DIA.2 mm	0007 865.26
PC6 V2 35 A 2 poles	0113 546.14
PC6 V2 35 A 3 poles	0116 536.05
PC6 V2 35 A 4 poles	0116 537.06
PC6 V2 35 A 10 poles	0113 548.26
EIP V2	0113 550.24
AD2,5 V2 24 A	0114 205.20
CBD2S	0178 408.14

① Sides of block and top of pull lever

① Sides of block and top of pull lever

Heavy duty switch terminal blocks with safety connection

Compression clamp

DIN 1 - DIN 3

End stop	th. 9,0 mm	BADL	V0	0199 408.02
End stop	th. 9,1 mm	BAM	V0	0199 306.01
End stop	th. 9,1 mm	BAM	V2	0103 002.26
End stop	th. 9,1 mm	BAMH	V0	0194 836.01
End stop	th. 9,1 mm	BAMH	V2	0114 836.00
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail	32 x 15	PR1Z2		0163 050.04
Other rails : See Accessories section				

Notes


The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

	1 End section	grey	FEM6	th. 2,8 mm	0118 368.16
	2 Separator end section (block)	grey	SCF6	th. 3 mm	0118 707.03
	3 Separator end section (rail)	grey	SCFM6	th. 3 mm	0114 825.05
	4 Separator end section	grey	SCFEX1	th. 2,4 mm	0103 619.04
	5 Separator end section	grey	SCFEX3	th. 2,4 mm	0103 620.01
	6 Test plug		FC2	DIA. 2 mm	0007 865.26
	7 Comb-type jumper bar		PC61	35 A 10 poles	0163 311.22
	8 IDC jumper		AD2,5	24 A	0114 205.20
	9 Shield connector		CBM5	th. 0,5 mm	0178 745.14
			CBM8	th. 0,8 mm	0178 746.15
	10 Bridging plug				
	11 Short-circuiting plug with test socket DIA. 4 mm/.16"				
	12 Short-circuiting plug without test				
	13 Cable lug				
				14 AWG	
				12 AWG	
				8 AWG	
	R See section on markers marking method				

M 4/6.SNTS


Spacing 6 mm + 0,05 (.238")



M 4/6.SN equipped with 2 test socket screws DIA. 2 mm/.079" with pressure springs under wire clamp for bare wire or wire equipped with flat lug.

M 6/8.STP.RS

Spacing 8 mm - 0,05 (.315")

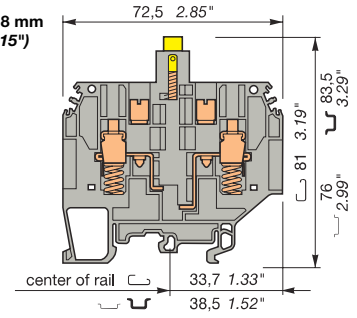

Switch connection by a yellow push-turn knob (1/4 turn). Block equipped with 2 test sockets DIA. 4 mm/.16", pressure springs under wire clamps for bare wire or wire equipped with bent lug.



Color	Type	Part numbers
Grey / Orange	M 4/6.SNTS	0115 229.20

Color	Type	Part numbers
Grey (V2)	M 6/8.STP.RS	0115 678.02
Beige (V0)	M 6/8.STP.RS	0195 678.03

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA
Compression Solid wire	0,5-4 mm ²	22-10 AWG	20-12 AWG
clamp Stranded wire	0,5-4 mm ²	22-10 AWG	20-12 AWG
Lug			
	Stranded wire		

Characteristics

Wire size	Wire size		
	IEC NFC DIN	UL	CSA NRTL/C
Compression Solid wire	0,5-10 mm ²	20-12 AWG	20-12 AWG
clamp Stranded wire	0,5-6 mm ²	20-12 AWG	20-12 AWG
Lug			
	Stranded wire		


Voltage			
Rated	500 V	300 V	300 V
Pulse			
Pollution degree			
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated / Gauge	4 mm ²	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,6 Nm 4,4-5,3 lb.in	IP 20 NEMA 1

Voltage			
Rated	500 V	600 V	600 V
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	24 A	25 A	25 A
Wire size			
Rated / Gauge	6 mm ² / A5	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
13 mm .512 "	4-5 mm .157"-.197"	0,8-1 Nm 7,1-8,9 lb.in	IP 20

Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16
SCF6	th. 3 mm 0118 707.03
SCFM6	th. 3 mm 0114 825.05
SCFEX1	th. 2,4 mm 0103 619.04
SCFEX3	th. 2,4 mm 0103 620.01
FC2	DIA. 2 mm 0007 865.26
PC61	35 A 10 poles 0163 311.22
AD2,5	24 A 0114 205.20
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

Type	Part numbers
FEMR8T V2	th. 2,8 mm 0116 991.06
FEMR8T V0	th. 2,8 mm 0196 991.07
FC4	DIA. 4 mm 0167 860.01
AD2,5 V2	24 A 0114 205.20
BP8.A4	0173 888.20
BNSTP1 light ivory	0196 792.17
BNSTP1 grey	0196 793.10
BNSTP2 red	0196 789.24
BNSTP2 grey	0196 790.21
	0101 618.01
	0101 619.02
	0101 620.07

Each wire clamp holds 2 bent lugs max. (not supplied) for connection of wires, as shown below :









(11) Sides of block

(17)

Heavy duty switch terminal blocks with removable plug


Compression clamp
 **DIN 1 - DIN 3**

- End stop  th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop  th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail  35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail  35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail  35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail  32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

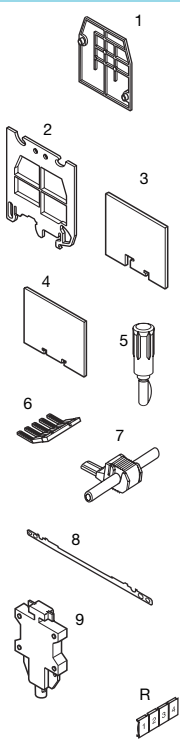


- 1** End section grey
- 2** Separator end section (rail) orange
- 3** Separator end section grey
- 4** Separator end section grey
- 5** Test plug
- 6** Comb type jumper bar 35 A
- 7** IDC jumper
- 8** Shield connector
- 9** Removable plug

R See section on markers marking method

M 4/6.SNBT3


Spacing 6 mm + 0,05 (.238")




6 mm block - Switch connection by removable plug - Equipped with two test socket screws DIA. 2 mm / .079".


M 4/6.SNBTA

Spacing 6 mm (.236")



6 mm block - Switch connection by removable plug - Equipped with two test socket screws DIA. 2,3 mm / .090".

Color	Type	Part numbers
Grey	 M 4/6.SNBT3	0115 439.13

Color	Type	Part numbers
Grey	 M 4/6.SNBTA	0115 496.05

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²		22-10 AWG	24-12 AWG
clamp Stranded wire	0,5-4 mm ²		22-10 AWG	24-12 AWG

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²			
clamp Stranded wire	0,5-4 mm ²			

Voltage			
Rated	320 V	300 V	300 V
Pulse	4 kV		
Pollution degree	3		



Voltage			
Rated	320 V		
Pulse	4 kV		
Pollution degree	3		



Current			
Rated	10 A	20 A	10 A

Current			
Rated	10 A		


Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	12 AWG
Wire stripping length	Recomm. screwdriver 4 mm .157"	Recomm. torque 0.5-0.6 Nm 4.4-5.3 lb.in	Protection IP 20 NEMA 1

Wire size			
Rated / Gauge	4 mm ² / A4		
Wire stripping length	Recomm. screwdriver 4 mm .157"	Recomm. torque 0.5-0.6 Nm 4.4-5.3 lb.in	Protection IP 20 NEMA 1


Type	Part numbers
FEM62 th. 3 mm	0114 994.07
FEM62 th. 3 mm	0103 612.25
SCFM6 th. 3 mm	0114 825.05
SCFEX1 (1)  th. 2,4 mm	0103 619.04
SCFEX3 (1)  th. 2,4 mm	0103 620.01
FC2 DIA. 2 mm	0007 865.26
PC61 10 poles	0163 311.22
AD2,5	0114 205.20
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15
6E delivered with block	0117 280.22

Type	Part numbers
FEM62 th. 3 mm	0114 994.07
FEM62 th. 3 mm	0103 612.25
SCFM6 th. 3 mm	0114 825.05
SCFEX1 (1)  th. 2,4 mm	0103 619.04
SCFEX3 (1)  th. 2,4 mm	0103 620.01
PC61 10 poles	0163 311.22
AD2,5	0114 205.20
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15
6E delivered with block	0117 280.22

Removable plug position closed circuit











Removable plug position open circuit



(1) Sides of block
 (1) End sections and separators snapped on rails.

(1) Sides of block

Selection guide for different types of plugs		Block spacing 5 mm	Block spacing 6 mm		Block spacing 8 mm	
Types of plugs	Types of fuses	MA 2,5/5.SB	M 4/6.SB M 4/6.SBT.4A M 4/6.D2.SB	M 4/6.S	M 6/8.SB	M 6/8.S
Switching function	Short-circuit plug		 <p>Plug closed 18,5 .73" open 26,5 1.04"</p> <p>Without test BNC62 0116 853.13 BNC62 V0 0196 853.14</p>		 <p>Plug closed 26,5 1.04" open 34,5 1.36"</p> <p>With test BNCT82 0116 926.04 BNCT82 V0 0196 926.05</p>	
		Fuse protection function	Plug with solder tags	Soldered fuses type FUBS - 0,5 to 5 A - 250 V	 <p>Plug closed 18,5 .73" open 29 1.14"</p> <p>BNS5 0116 702.24 BNS5 V0 0196 702.25</p>	 <p>Plug closed 21 .83" open 29 1.14"</p> <p>BNS6 0113 240.05</p>
Plug with solder tags and screws (1)	Soldered fuses type FUBS - 0,5 to 5 A - 250 V				 <p>Plug closed 18,5 .73" open 26,5 1.04"</p> <p>BNSV62 0116 854.14 BNSV62 V0 0196 854.15</p>	 <p>Plug closed 21 .83" open 29 1.14"</p> <p>BNSV6 0114 348.06</p>
			Fuse holder plug	Automotive miniature fuses (2) type MINI®Blade fuse 2 A to 3 A - 32 V maxi	 <p>5,4 .21"</p> <p>BFAUTO 0299 486.24 V0 black</p>	
Fuse holder plug	Fuses 5 x 20 type FU520 - 0,5 to 5 A - 250 V				 <p>Plug closed 29 1.14" open 37 1.46"</p> <p>BNF652 0116 998.15 BNF652 V0(6) 0196 998.16 BNF652D(3) 0116 999.16 BNF652D1 (4) 0116 966.14 BNF652L (5) 0116 967.15</p>	
			Fuses 5 x 25 type FU525 - 1,6 to 6,3 A - 250 V			

Types of fuses

Soldered fuses 250 V

FUBS	0,5 A	0174 893.16
FUBS	1 A	0174 894.17
FUBS	2 A	0174 895.10
FUBS	3 A	0174 896.11
FUBS	5 A	0174 897.12

Flat fuses 250 V

FUPLV	1 A	0008 096.20
FUPLV	2 A	0008 097.21
FUPLV	5 A	0008 098.02

Fuses 5 x 20 mm 250 V

FU520	0,5 A	0008 288.15
FU520	1 A	0008 290.13
FU520	2 A	0008 291.00
FU520	3.15 A	0008 289.16
FU520	5 A	0008 292.01

Automotive miniature fuses 32 V max.

FUAUTO	2 A	0179 879.14
FUAUTO	3 A	0179 880.02

Fuses 5 x 25 mm 250 V

FU525	1.6 A	0167 546.22
FU525	2 A	0167 547.23
FU525	2.5 A	0167 548.04
FU525	4 A	0167 549.05
FU525	6.3 A	0167 550.02

Note : (1) Compatible with electronic components max. diameter or thickness for components : - plug BNSV62 : 4 mm / .157" max. - plug BNSV82 : 6 mm / .236" max. (2) For all fuses, the dissipated load should remain under 0,8 W. (3) With LED 24 V AC/DC. (4) With LED 48 V AC/DC. (5) With neon lamp 110-230 V AC/DC. (6) Except M 4/6.D2.SB

Heavy duty switch terminal blocks with plug

Compression clamp

DIN 1 - DIN 3

End stop	th. 9,1 mm	BADL	V0	0199 408.02
End stop	th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail	32 x 15	PR122		0163 050.04
Other rails : See Accessories section				

Notes


The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

	1 End section	grey beige	FEM6	th. 2,8 mm	0118 368.16
	2 Separator end section (block)		SCF6	th. 3 mm	0118 707.03
	3 Separator end section (rail)		SCFM6	th. 3 mm	0114 825.05
	4 Short circuit plug(2)		BNC62	th. 6 mm	0116 853.13
	5 Short circuit plug+test(2)		BNC62 V0	V0	0196 853.14
	6 Plug with solder tags (2)		BNSV62		0116 854.14
	7 Plug with solder tags and screw(2)		BNSV62 V0	V0	0196 854.15
	8 Fuse-holder plug for car manufact.(2)		BFAUTO	V0	0299 486.24
	9 Fuse-holder plug (for fuses 5x20 or 5x25)(2)		BNF652	th. 6 mm	0116 998.15
	10 Plug extractor		BNF652 V0	V0	0196 998.16
	11 Comb-type jumper bar		BNF652 D (1)	th. 6 mm	0116 999.16
	12 IDC jumper		BNF652 D1(1)	th. 6 mm	0116 966.14
	13 Shield connector		BNF652 L (1)	th. 6 mm	0116 967.15
	R See section on markers marking method		EXBN2		0171 018.20
			CBM5	th. 0,5 mm	0178 745.14
			CBM8	th. 0,8 mm	0178 746.15

MA 2,5/5.SB


Spacing 5 mm (.200")



5 mm block - switch connection by polarized plug delivered separately.

M 4/6.SB

Spacing 6 mm + 0,05 (.238")



5 mm block - switch connection by polarized plug delivered separately.



Color	Type	Part numbers
Grey	MA 2,5/5.SB	0115 506.17

Color	Type	Part numbers
Grey	M 4/6.SB	0115 435.07
Beige V0	M 4/6.SB.V0	0195 435.00

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²			
clamp Stranded wire	0,5-2,5 mm ²			

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²		22-10 AWG	20-12 AWG
clamp Stranded wire	0,5-4 mm ²		22-10 AWG	20-12 AWG

Voltage			
Rated	320 V(3)		
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A		
Wire size			
Rated	2,5 mm ² / A3		
Wire stripping length (screw)	Recommended screwdriver(screw)	Recommended torque (screw)	Protection
10 mm .394"	3,5 mm .138"	0,4-0,6 Nm 3.5-5.3 lb.in	IP 20 NEMA 1

Voltage			
Rated	250 V(3)	300 V	300 V
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	10 A	10 A	10 A
Wire size			
Rated	4 mm ² / A4	10 AWG	12 AWG
Wire stripping length (screw)	Recommended screwdriver(screw)	Recommended torque (screw)	Protection
9,5 mm .374"	4 mm .157"	0,5-0,8 Nm 4.4-7 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16
SCF6	th. 3 mm 0118 707.03
SCFM6	th. 3 mm 0114 825.05
BNS5	0116 702.24
BNS5 V0	0196 702.25
EXBN2	0171 018.20
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

Type	Part numbers
FEM62	th. 3 mm 0114 994.07
FEM62 V0	V0 th. 3 mm 0194 994.00
SCF6	th. 3 mm 0118 707.03
SCFM6	th. 3 mm 0114 825.05
BNC62	th. 6 mm 0116 853.13
BNC62 V0	V0 th. 6 mm 0196 853.14
BNSV62	0116 854.14
BNSV62 V0	V0 0196 854.15
BFAUTO	V0 black 0299 486.24
BNF652	th. 6 mm 0116 998.15
BNF652 V0	V0 th. 6 mm 0196 998.16
BNF652 D (1)	th. 6 mm 0116 999.16
BNF652 D1(1)	th. 6 mm 0116 966.14
BNF652 L (1)	th. 6 mm 0116 967.15
EXBN2	0171 018.20
PC61	35 A 10 poles 0163 311.22
AD2,5	24 A 0114 205.20
CBM5	th. 0,5 mm 0178 745.14
CBM8	th. 0,8 mm 0178 746.15

⑥ RC510 on plug

⑩ Block sides

⑥ RC610 on plug


⑩ Block sides

Note : (1) Leakage current : - with LED 24V or 48V : < 1,6 mA.
- with neon lamp 110 or 230 V AC/DC : < 0,5 mA.

(2) See Selection Guide for dimensions of plug and types of fuses to use.

M 6/8.SB

Spacing 8 mm - 0,05 (.315")



8 mm block - switch connection by polarized plug delivered separately.



Color	Type	Part numbers
Grey	M 6/8.SB	0115 436.00
Beige V0	M 6/8.SB.V0	0195 436.01

Characteristics

Wire size		IEC	UL	CSA
		NFC DIN		
Compression clamp	Solid wire	0,5-10 mm ²	22-10 AWG	20-12 AWG
	Stranded wire	0,5-6 mm ²	22-10 AWG	20-12 AWG

Voltage			
Rated	400 V(3)	300 V	300 V
Pulse	4 kV		
Pollution degree	3		

Current			
Rated	15 A	20 A	10 A

Wire size			
Rated	6 mm ² / A5	10 AWG	12 AWG

Wire stripping length	Recommended screwdriver	Recommended torque	Protection
12 mm .472"	4-5 mm .157" - .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1

Type	Part numbers
FEM8	th. 3 mm 0113 373.26
FEM8 V0	V0 th. 3 mm 0193 373.27

BNCT82	grey	0116 926.04
BNCT82 V0	V0 beige	0196 926.05
BNSV82	grey	0116 927.05
BNSV82 V0	V0 beige	0196 927.06

BNF52	grey	0116 924.02
BNF52	orange	0105 133.17
BNF52 V0	V0 beige	0196 924.03

EXBN2		0171 018.20
PC8 (4)	50 A 10 poles	0163 313.24
AD2,5	24 A	0114 205.20

(6) On plug (11) (17) Sides of block
(4) Other pole numbers, see accessories.

BFAUTO

Fuse holder plug for automotive "miniature" fuse

The fuse holder plug **BFAUTO** is an innovative solution for a fuse application in a tight space : **spacing 6 mm**.

The BFAUTO holds "miniature" automotive fuses type **MINI® Blade** and can be plugged into ENTRELEC heavy duty switch terminal blocks spacing 6 mm. It can be used with compression clamp and insulation displacement, ADO terminal blocks (see right column).

It can be used with test plugs FC2 or test devices on screw head DCJ or DCG.

MINI® Blade Fuse is a LITTLEFUSE trademark.

Type	Part numbers
Fuse holder plug	
BFAUTO black V0	0299 486.24
Fuses - 32 V max.	
FUAUTO 2A	0179 879.14
FUAUTO 3A	0179 880.02
Extraction tool	
EXBN2	0171 018.20


Characteristics

Voltage		
Rated	320 V (1)	
Pulse	3 kV	
Pollution degree	3	


Current		
Rated	3 A max.	

(1) Insulation voltage of the plug.
Use voltage in accordance with fuse rating.
For all fuses, the power loss must remain under 0,8 W.


MOUNTING



Automotive "miniature" fuse



BFAUTO plug




Switch terminal block spacing 6 mm

1 - Insert the miniature fuse into the BFAUTO plug.

2 - Insert the assembly (fuse + BFAUTO plug) into the terminal block by pushing on the fuse.

REMOVAL




3 - Remove the assembly fuse + BFAUTO plug manually or with a screwdriver making a rotating action or with the help of the EXBN2 extraction tool.

4 - Remove the fuse manually from the BFAUTO plug.

M 4/6.SB

Spacing 6 mm + 0,05 (.238")




M 4/6.SB 0115 435.07

Limited to 3 A
FUAUTO maxi. fuses.

See standard block
M 4/6.SB

M 4/6.SBT.4A

Spacing 6 mm + 0,05 (.238")




M 4/6.SBT.4A 0115 555.17

Limited to 3 A
FUAUTO maxi. fuses.

See standard block
M 4/6.SBT.4A

M 4/6.D2.SB

Spacing 6 mm + 0,05 (.238")



M 4/6.D2.SB 0115 702.23

Limited to 3 A
FUAUTO maxi. fuses.

See standard block
M 4/6.D2.SB


Characteristics and accessories

Heavy duty switch terminal blocks with plug

Double compression clamp
 **DIN 1 - DIN 3**

M 4/6.SBT.4A

Spacing 6 mm + 0,05 (.238")



6 mm block - switch connection by polarized plug delivered separately, equipped with 2 test socket-screws DIA. 2 mm.



Color	Type	Part numbers
Grey	M 4/6.SBT.4A	0115 555.17
Beige V0	M 4/6.SBT.4A.V0	0195 555.10

Characteristics

Wire size		IEC	UL	CSA
		NFC	DIN	
Compression Solid wire		0,5-4 mm ²		
clamp Stranded wire		0,5-4 mm ²		

Voltage			
Rated	250 V(2)		
Pulse	4 kV		
Pollution degree	3		

Current			
Rated	10 A		

Wire size			
Rated	4 mm ² / A4		
Wire stripping length	Recommended screwdriver	Recommended torque	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1

End stop		th. 9,1 mm	BADL	V0	0199 408.02
End stop		th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section					
Rail		35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail		35 x 15 x 2,3	PR4		0168 500.12
Rail		35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail		32 x 15	PR1Z2		0163 050.04
Other rails : See Accessories section					

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

	1 End section	grey beige
	2 Short circuit plug(3)	
	3 Plug with solder tags and screw(3)	
	4 Fuse-holder plug for automotive fuse (3)	
	5 Fuse-holder plug (for fuses 5x20 or 5x25) BNF652 with LED 24 V AC/DC BNF652 with LED 48 V AC/DC BNF652 with neon 110/230VAC/DC(3)	
	6 Plug extractor	
	7 Test plug	
	8 Comb-type jumper bar	35 A
	9 IDC jumper	
	R See section on marking method	

Type	Part numbers
FEM6.4A	th. 3 mm 0116 629.22
FEM4A V0	V0 th. 3 mm 0196 629.23
BNC62	th. 6 mm 0116 853.13
BNC62 V0	V0 th. 6 mm 0196 853.14
BNSV62	0116 854.14
BNSV2 V0	V0 0196 854.15
BFAUTO	V0 black 0299 486.24
BNF652	th. 6 mm 0116 998.15
BNF652V0	V0 th. 6 mm 0196 998.16
BNF652 D (1)	th. 6 mm 0116 999.16
BNF652 D1(1)	th. 6 mm 0116 966.14
BNF652 L (1)	th. 6 mm 0116 967.15
EXBN2	0171 018.20
FC2	DIA. 2 mm 0007 865.26
PC61	10 poles 0163 311.22
AD2,5	0114 205.20

(1) Block sides (6) RC610 on plug

Note : (1) Leakage current: - with LED 24V or 48V : < 1,6 mA. (3) Insulation voltage - operating voltage : in accordance with fuse rating.
 - with neon lamp 110 or 230V AC/DC : < 0,5 mA.
 (2) See selection guide for dimensions of plug and types of fuses to use.

Heavy duty switch terminal blocks with plug Double deck

Compression clamp

DIN 1 - DIN 3

End stop	th. 9,1 mm	BAMH	0114 836.00
<i>Other end stops : See Accessories section</i>			
Rail	35 x 7,5 x 1	PR30 prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4	0168 500.12
Rail	35 x 15 x 1,5	PR5 prepunched	0101 598.26
Rail	32 x 15	PR1Z2	0163 050.04
<i>Other rails : See Accessories section</i>			

Notes


The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

	1 End section	grey	FEMS6D	th. 1 mm	0116 591.05
	2 Short circuit plug(6)		BNC62	th. 6 mm	0116 853.13
	3 Plug with solder tags and screw(6)		BNSV62		0116 854.14
	4 Fuse-holder plug for car manufact.(6)		BFAUTO	V0 black	0299 486.24
	5 Fuse-holder plug (for fuses 5x20 or 5x25)		BNF652	th. 6 mm	0116 998.15
	6 Plug extractor		BNF652 D (4)	th. 6 mm	0116 999.16
	7 Test plug		BNF652 D1 (4)	th. 6 mm	0116 966.14
	8 Assembled jumper bar (with IP20 protection)		BNF652 L (4)	th. 6 mm	0116 967.15
	8 Assembled jumper bar (without IP20 protection)		EXBN2		0171 018.20
	9 Connector plate		FC2	DIA. 2 mm	0007 865.26
	10 Jumper bar		BJM6D (1)(2)	32 A 2 poles	0173 515.11
	Post + screw + washer		BJM6D (1)(2)	32 A 3 poles	0173 516.12
	11 Pivoting jumper bar		BJM6D (1)(2)	32 A 4 poles	0173 517.13
	12 Comb-type jumper bar	35 A	BJM6D (1)(2)	32 A 5 poles	0173 519.25
	13 IDC jumper		BJM6D (1)(2)	32 A 10 poles	0173 520.22
	14 Shield connector		BJMI6D (1)(2)	32 A 2 poles	0179 668.20
			BJMI6D (1)(2)	32 A 3 poles	0179 669.21
			BJMI6D (1)(2)	32 A 4 poles	0179 670.26
			BJMI6D (1)(2)	32 A 5 poles	0179 671.13
			BJMI6D (1)(2)	32 A 10 poles	0179 672.14
			EL6	35 A	0173 627.21
			BJS61 (1)(2)(3)	32 A 10 poles	0168 485.27
			EV6D		0168 400.16
			BJP61	35 A	0167 225.20
			PC61	35 A 10 poles	0163 311.22
			AD2,5	24 A	0114 205.20
			CBD2S		0178 408.14
	R See section on markers marking method				

M 4/6.D2.SB

Spacing 6 mm + 0,05 (.238")



6 mm block equipped with 4 test sockets DIA 2 mm. Switch connection by polarized plug on upper deck, delivered separately. Lower circuit is a continuous feed through.



Color	Type	Part number
Grey	M 4/6.D2.SB	0115 702.23

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-4 mm ²			
clamp Stranded wire	0,5-4 mm ²			

Voltage			
Rated	250 V(5)		
Pulse	4 kV		
Pollution degree	3		

Current			
Rated	10 A		

Wire size			
Rated	4 mm ² / A4		
Wire stripping length (screw)	Recommended screwdriver(screw)	Recommended torque (screw)	Protection
9,5 mm .374 "	4 mm .157"	0,5-0,6 Nm 4.4-5.3 lb.in	IP 20 NEMA 1

Type	Part numbers
FEMS6D	th. 1 mm 0116 591.05
BNC62	th. 6 mm 0116 853.13
BNSV62	0116 854.14
BFAUTO V0 black	0299 486.24
BNF652	th. 6 mm 0116 998.15
BNF652 D (4)	th. 6 mm 0116 999.16
BNF652 D1 (4)	th. 6 mm 0116 966.14
BNF652 L (4)	th. 6 mm 0116 967.15
EXBN2	0171 018.20
FC2	DIA. 2 mm 0007 865.26
BJM6D (1)(2) 32 A 2 poles	0173 515.11
BJM6D (1)(2) 32 A 3 poles	0173 516.12
BJM6D (1)(2) 32 A 4 poles	0173 517.13
BJM6D (1)(2) 32 A 5 poles	0173 519.25
BJM6D (1)(2) 32 A 10 poles	0173 520.22
BJMI6D (1)(2) 32 A 2 poles	0179 668.20
BJMI6D (1)(2) 32 A 3 poles	0179 669.21
BJMI6D (1)(2) 32 A 4 poles	0179 670.26
BJMI6D (1)(2) 32 A 5 poles	0179 671.13
BJMI6D (1)(2) 32 A 10 poles	0179 672.14
EL6 35 A	0173 627.21
BJS61 (1)(2)(3) 32 A 10 poles	0168 485.27
EV6D	0168 400.16
BJP61 35 A	0167 225.20
PC61 35 A 10 poles	0163 311.22
AD2,5 24 A	0114 205.20
CBD2S	0178 408.14







(1) Block sides (6) RC610 on plug

Note: (1) Use of these accessories requires the user to cut out the partition. (2) For lower deck only. (3) For other numbers of poles, see accessories. (4) Leakage current: - with LED 24V or 48V: < 1.6 mA - with neon lamp 110 or 230V AC/DC: < 0,5 mA. (5) Insulation voltage - operating voltage: in accordance with fuse rating. (6) See selection guide for plug size and fuse type to use.

Switch terminal blocks with plug

Compression clamp


 **DIN 1 - DIN 3**

End stop		th. 9,1 mm	BADL	V0	0199 408.02
End stop		th. 9,1 mm	BAM		0103 002.26
<i>Other end stops : See Accessories section</i>					
Rail		35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail		35 x 15 x 2,3	PR4		0168 500.12
Rail		35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail		32 x 15	PR1Z2		0163 050.04
<i>Other rails : See Accessories section</i>					

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

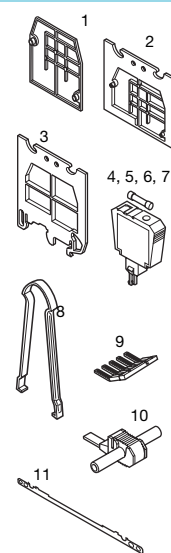


- 1 End section grey
- 2 Separator end section (block)
- 3 Separator end section (rail)
- 4 Plug with solder tags (4)
- 5 Plug with solder tags and screws (4)
- 6 Plug equipped with a diode (1N 4007)
- 7 Fuse-holder plug (for fuses 5x20 or 5x25) (4)
- 8 Plug extractor
- 9 Comb type jumper bar
- 10 IDC jumper
- 11 Shield connector

R See section on markers marking method

M 4/6.S


Spacing 6 mm + 0,05 (.238")



6 mm block - switch connection by polarized plug (delivered separately).



M 6/8.S

Spacing 8 mm - 0,05 (.315")



8 mm block - switch connection by polarized plug (delivered separately).



Color	Type	Part numbers	Color	Type	Part numbers
Grey	 M 4/6.S	0115 213.10	Grey	 M 6/8.S	0115 234.15



Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Screw	Solid wire	0,5-4 mm ²	22-10 AWG	
	Stranded wire	0,5-4 mm ²	22-10 AWG	

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Screw	Solid wire	0,5-10 mm ²	22-8 AWG	
	Stranded wire	0,5-6 mm ²	22-8 AWG	







Voltage				Voltage			
Rated	160 V(5)	600 V		Rated	160 V(5)	600 V	
Pulse	2,5 kV			Pulse	2,5 kV		
Pollution degree	3			Pollution degree	3		
Current				Current			
Rated	10 A	10 A		Rated	16 A	20 A	
Wire size				Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG		Rated / Gauge	6 mm ² / A5	8 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
9,5 mm .374 "	4 mm .157 "	0,5-0,8 Nm 4,4-7 lb.in	IP 20 NEMA 1	12 mm .472 "	4-5 mm .157" - .197"	0,8-1 Nm 7,1-8,9 lb.in	IP 20 NEMA 1

Type	Part numbers	Type	Part numbers
FEM6	th. 2,8 mm 0118 368.16	FEM8	th. 3 mm 0113 373.26
SCF6	th. 3 mm 0118 707.03	SCFM6	th. 3 mm 0114 825.05
BNS6 (1)	0113 240.05	BNS8 (2)	0113 794.15
BNSV6	0114 348.06	BNSV8	0114 349.07
BNS6DD1	 0103 273.01	BNF5	0113 795.16
BNS6DG1	 0103 275.03	EXBN2	0171 018.20
EXBN2	0171 018.20	PC61	35 A 10 poles 0163 311.22
PC61	35 A 10 poles 0163 311.22	AD2,5	24 A 0114 205.20
AD2,5	24 A 0114 205.20	CBM5	th. 0,5 mm 0178 745.14
CBM5	th. 0,5 mm 0178 745.14	CBM8	th. 0,8 mm 0178 746.15
CBM8	th. 0,8 mm 0178 746.15		

Note : (1) Soldered connection max. 23 x 8 - thickness 4 mm. (2) Soldered connection max. 23 x 8 - thickness 6 mm. (3) For other pole numbers, see accessories. (4) See choice guide for dimensions of the plug and types of fuses to be used. (5) Insulation voltage - use voltage : in accordance with fuse rating.

Heavy duty switch terminal blocks with push-turn knob


Compression clamp
 **DIN 1 - DIN 3**

- End stop  th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop  th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail  35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail  35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail  35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail  32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.


Accessories

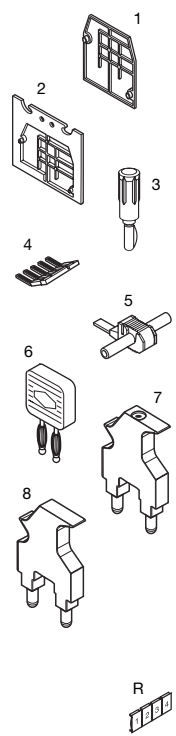

	Type	Part numbers
1 End section	grey	FEMT1 th. 2,8 mm 0113 137.02
2 Circuit separator	grey	SCFT1 th. 1 mm 0103 588.26
3 Test plug		FC4 DIA. 4 mm 0167 860.01
4 Comb type jumper bar	50 A	PC8 2 poles 0116 538.17
	50 A	PC8 3 poles 0116 539.10
	50 A	PC8 4 poles 0116 540.25
	50 A	PC8 10 poles 0163 313.24
5 IDC jumper		AD2,5 0114 205.20
6 Connection plug		BP8.A4 0173 888.20
7 Short-circuiting plug with test socket DIA. 4 mm/.16"	light ivory	BNSTP1 0196 792.17
	grey	BNSTP1 0196 793.10
8 Short-circuiting plug without test	red	BNSTP2 0196 789.24
	grey	BNSTP2 0196 790.21
R See section on marking method		

M 6/8.STP


Spacing 8 mm - 0,05 (.315")



Switch connection by a yellow push-turn knob (1/4 turn), white on top, sealed in the open position. Block equipped with 2 test sockets DIA. 4 mm / .16".

M 6/8.STP1

Spacing 8 mm - 0,05 (.315")



M 6/8.STP with an orange push-turn knob - Can be sealed in the open and closed position. Block equipped with 2 test sockets DIA. 4 mm / .16".

Color	Type	Part numbers
Grey	M 6/8.STP	0115 277.20

Color	Type	Part numbers
Grey	M 6/8.STP1	0115 529.15

Characteristics

Wire size	Wire size		
	NFC DIN	UL	CSA
Compression Solid wire	0,5-10 mm ²	22-8 AWG	8 AWG max.
clamp Stranded wire	0,5-6 mm ²	22-8 AWG	8 AWG max.

Characteristics

Wire size	Wire size		
	NFC DIN	UL	CSA
Compression Solid wire	0,5-10 mm ²		8 AWG max.
clamp Stranded wire	0,5-6 mm ²		8 AWG max.

Voltage			
Rated	500 V Gr.C	600 V	600 V
Pulse			
Pollution degree			
Current			
Rated	15 A	15 A	15 A
Wire size			
Rated / Gauge	6 mm ²	8 AWG	8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
11 mm .433 "	4 mm .157 "	0,8-1 Nm 7,1-8,9 lb.in	IP 10

Voltage			
Rated	500 V Gr.C		600 V
Pulse			
Pollution degree			
Current			
Rated	15 A		15 A
Wire size			
Rated / Gauge	6 mm ²		8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
11 mm .433 "	4 mm .157 "	0,8-1 Nm 7,1-8,9 lb.in	IP 10

Type	Part numbers
FEMT1 th. 2,8 mm	0113 137.02
SCFT1 th. 1 mm	0103 588.26
FC4 DIA. 4 mm	0167 860.01
PC8 2 poles	0116 538.17
PC8 3 poles	0116 539.10
PC8 4 poles	0116 540.25
PC8 10 poles	0163 313.24
AD2,5	0114 205.20
BP8.A4	0173 888.20
BNSTP1 light ivory	0196 792.17
BNSTP1 grey	0196 793.10
BNSTP2 red	0196 789.24
BNSTP2 grey	0196 790.21







Type	Part numbers
FEMT1 th. 2,8 mm	0113 137.02
SCFT1 th. 1 mm	0103 588.26
FC4 DIA. 4 mm	0167 860.01
PC8 2 poles	0116 538.17
PC8 3 poles	0116 539.10
PC8 4 poles	0116 540.25
PC8 10 poles	0163 313.24
AD2,5	0114 205.20
BP8.A4	0173 888.20
BNSTP1 light ivory	0196 792.17
BNSTP1 grey	0196 793.10
BNSTP2 red	0196 789.24
BNSTP2 grey	0196 790.21

(11) (17) Sides of block

(11) (17) Sides of block













Heavy duty switch terminal blocks with push-turn knob

Compression clamp
 DIN 1 - DIN 3

- End stop  th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop  th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail  35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail  35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail  35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail  32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section


Notes
 The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Accessories

- | | | |
|--|---|------|
|  | 1 End section | grey |
|  | 2 Circuit separator | grey |
|  | 3 Test socket | |
|  | 4 Test plug | |
|  | 5 Assembled jumper bar | 41 A |
| | | 41 A |
| | | 41 A |
| | | 41 A |
| | | 41 A |
| | | 41 A |
|  | 6 Post + screw + washer | |
|  | 7 Comb-type jumper bar | 50 A |
| | | 50 A |
| | | 50 A |
| | | 50 A |
| | | 50 A |
|  | 8 IDC jumper | 24 A |
|  | 9 Connection plug | |
|  | 10 Short-circuiting plug with test socket DIA. 4 mm/.16" | |
|  | 11 Short-circuiting plug without test | |
|  | R See section on markers marking method | |

M 6/8.STP2


Spacing 8 mm - 0,05 (.315")




Switch connection by an orange push-turn knob (1/4 turn) which can be sealed in the open and closed position.


M 6/8.STP3

Spacing 8 mm - 0,05 (.315")



8 mm nondisconnect terminal block.

Color	Type	Part numbers
Grey	 M 6/8.STP2	0115 499.10

Color	Type	Part numbers
Grey	 M 6/8.STP3	0115 500.25

Characteristics

Wire size	NFC DIN		UL	CSA
	Compression Solid wire	0,5-10 mm ²		
clamp Stranded wire	0,5-6 mm ²			8 AWG max.

Characteristics

Wire size	NFC DIN		UL	CSA
	Compression Solid wire	0,5-10 mm ²		
clamp Stranded wire	0,5-6 mm ²			8 AWG max.

Voltage

Rated	500 V Gr.C	600 V
Pulse		
Pollution degree		

Current

Rated	15 A	15 A
-------	------	------

Wire size

Rated / Gauge	6 mm ²	8 AWG
---------------	-------------------	-------

Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
11 mm .433 "	4 mm .157"	0,8-1 Nm 7,1-8,9 lb.in	IP 10

Voltage

Rated	500 V Gr.C	600 V
Pulse		
Pollution degree		

Current

Rated	46 A	15 A
-------	------	------

Wire size

Rated / Gauge	6 mm ²	8 AWG
---------------	-------------------	-------

Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
11 mm .433 "	4 mm .157"	0,8-1 Nm 7,1-8,9 lb.in	IP 10

Type	Part numbers
FEMT1 th. 2,8 mm	0113 137.02
SCFT1 th. 1 mm	0103 588.26
AL4 DIA. 4 mm	0163 240.17
FC4 (1) DIA. 4 mm	0167 860.01
BJS8 2 poles	0164 581.13
BJS8 3 poles	0164 582.14
BJS8 4 poles	0164 583.15
BJS8 5 poles	0164 737.26
BJS8 10 poles	0164 584.16
BJS8 20 poles	0174 789.05
EV6	0168 604.16
PC8 2 poles	0116 538.17
PC8 3 poles	0116 539.10
PC8 4 poles	0116 540.25
PC8 10 poles	0163 313.24
AD2,5	0114 205.20
BP8.A4 (1)	0173 888.20
BNSTP1 (1) light ivory	0196 792.17
BNSTP1 (1) grey	0196 793.10
BNSTP2 (1) red	0196 789.24
BNSTP2 (1) grey	0196 790.21

Type	Part numbers
FEMT1 th. 2,8 mm	0113 137.02
SCFT1 th. 1 mm	0103 588.26
AL4 DIA. 4 mm	0163 240.17
FC4 (1) DIA. 4 mm	0167 860.01
BJS8 2 poles	0164 581.13
BJS8 3 poles	0164 582.14
BJS8 4 poles	0164 583.15
BJS8 5 poles	0164 737.26
BJS8 10 poles	0164 584.16
BJS8 20 poles	0174 789.05
EV6	0168 604.16
PC8 2 poles	0116 538.17
PC8 3 poles	0116 539.10
PC8 4 poles	0116 540.25
PC8 10 poles	0163 313.24
AD2,5	0114 205.20
BP8.A4 (1)	0173 888.20
BNSTP1 (1) light ivory	0196 792.17
BNSTP1 (1) grey	0196 793.10
BNSTP2 (1) red	0196 789.24
BNSTP2 (1) grey	0196 790.21

(11) (17) Sides of block

(11) (17) Sides of block

Note : (1) For block equipped with AL4.

Terminal blocks for test circuits

Compression clamp

DIN 1 - DIN 3



Other end stops : See Accessories section

Rail 35 x 7,5 x 1 PR30 prepunched 0173 220.05

Rail 35 x 15 x 2,3 PR4 0168 500.12

Rail 35 x 15 x 1,5 PR5 prepunched 0101 598.26

Rail 32 x 15 PR122 0163 050.04

Other rails : See Accessories section

End stop th. 9,1 mm BADL V0 0199 408.02

End stop th. 9,1 mm BAM 0103 002.26

Other end stops : See Accessories section

Rail 35 x 7,5 x 1 PR30 prepunched 0173 220.05

Rail 35 x 15 x 2,3 PR4 0168 500.12

Rail 35 x 15 x 1,5 PR5 prepunched 0101 598.26

Rail 32 x 15 PR122 0163 050.04

Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.

Metering is carried out easily by means of a plug connected to a metering instrument without disturbing the wiring.

Accessories

1 End section grey beige

2 Plug

3 Assembly key for plugs

4 Crimped pins 24-20 AWG 0,22 to 0,5 mm²

18 AWG 1 mm²

16 AWG 1,5 mm²

14 AWG 2,5 mm²

12 AWG 4 mm²

5 Crimping tool for BRC

6 Comb-type jumper bar

7 IDC jumper

8 Assembled jumper bar 57 A

(without IP20 protection) 57 A

57 A

57 A

9 Assembled jumper bar 57 A

(with IP20 protection) 57 A

57 A

57 A


10 Shield connector

57 A

R See section on markers marking method

M 4/6.ST


Spacing 6 mm (.238")



Standard terminal block delivered without plug.

M 4/8,5.STI

Spacing 8,5 mm (.334")



M 4/6.ST block equipped with a keyed end section recommended for "current" circuits. Delivered without plug.



Color	Type	Part numbers
Tinned contact blades		
Grey	M 4/6.ST.Sn	0115 313.14
Beige V0	M 4/6.ST.Sn.V0	0195 313.15
Gold contact blades (2)		
Grey	M 4/6.ST.Au	0115 314.15
Beige V0	M 4/6.ST.Au.V0	0195 314.16

Color	Type	Part numbers
Tinned contact blades		
Grey	M 4/8,5.STI.Sn	0115 315.16
Beige V0	M 4/8,5.STI.Sn.V0	0195 315.17
Gold contact blades (2)		
Grey	M 4/8,5.STI.Au	0115 316.17
Beige V0	M 4/8,5.STI.Au.V0	0195 316.10

Characteristics

Wire size	NFC DIN			UL			CSA		
	Compression	Solid wire	0,5-4 mm ²	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG
Clamp	Stranded wire	0,5-4 mm ²	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG
Crimped (plug)	0,22 to 2,5 mm ² according to pin 24-12 AWG								

Characteristics

Wire size	NFC DIN			UL			CSA		
	Compression	Solid wire	0,5-4 mm ²	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG
Clamp	Stranded wire	0,5-4 mm ²	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG	22-12 AWG
Crimped (plug)	0,22 to 2,5 mm ² according to pin 24-12 AWG								

Voltage

Rated	500 V Gr.C	300 V	150 V
Pulse			
Pollution degree			

Voltage

Rated	500 V Gr.C		150 V
Pulse			
Pollution degree			

Current

Rated	5 A (1)	10 A	5 A
-------	---------	------	-----

Current

Rated	5 A (1)		5 A
-------	---------	--	-----

Wire size

Rated / Gauge	4 mm ²	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver 4 mm .157"	Recomm. torque 0,5-0,8 Nm 4,4-7 lb.in	Protection
9,5 mm .374"			

Wire size

Rated / Gauge	4 mm ²		12 AWG
Wire stripping length	Recomm. screwdriver 4 mm .157"	Recomm. torque 0,5-0,8 Nm 4,4-7,1 lb.in	Protection
9,5 mm .374"			

Accessories

Type	Part numbers
FEMT3 th. 2,5 mm	0114 328.22
FEMT3V0 V0 th. 2,5 mm	0194 328.23
BNT1 (3) red	0105 012.11
BNT1 V0 (3) red	0199 135.17
BNT2 (3) grey	0114 329.23
BNT2 V0 (3) beige	0194 329.24
BNT3 (3) green	0105 011.10
BNT3 V0 (3) green	0199 136.10
CVABM (3)	0183 436.05
BRC (3)	0174 558.05
BRC (3)	0173 906.22
BRC (3)	0173 907.23
BRC (3)	0173 908.04
BRC (3)	0174 601.01
PSC (3)	0173 181.13
PC61 35 A 10 poles	0163 311.22
AD2,5	0114 205.20
AD2,5	0114 205.20
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15


Accessories

Type	Part numbers
BNT3 (3) green	0105 011.10
BNT3 V0 (3) green	0199 136.10
BRC (3)	0174 558.05
BRC (3)	0173 906.22
BRC (3)	0173 907.23
BRC (3)	0173 908.04
BRC (3)	0174 601.01
PSC (3)	0173 181.13
AD2,5	0114 205.20
AD2,5	0114 205.20
CBM5 th. 0,5 mm	0178 745.14
CBM8 th. 0,8 mm	0178 746.15

Note : (1) Maximum withstand current : 30 A - 1 second. (2) With gold contact blades (Au-Ni) low level use : current min. = 1 mA - voltage min. = 1 V. (3) Use AMP crimping tool 47 386 for 24-22 AWG conductors and 47 387 for 16 AWG and larger conductors. For crimping and assembly data : see section on modular test connectors.

M 10/10.ST-Sn


Spacing 10 mm (.394")



Standard terminal block delivered without plug.

M 10/12,5.STI-Sn

Spacing 12,5 mm (.492")



M 10/10.ST-Sn block equipped with a keyed end section recommended for "current" circuits. Delivered without plug.

Utilization of each type of plug


Number of operations : 200

On request, the plugs can be replaced by an insertable printed circuit for diagnostic testing.

BNT1 ("voltage" plug)

- Red "Break before make"
- Red V0

0105 012.11
0199 135.17




- 1st step : the plug cuts the circuit.
- 2nd step : the test circuit connection is made.

BNT2 ("polarity" plug)

- Grey
- Beige V0

0114 329.23
0194 329.24




Plug not equipped with pins cuts the circuit.

BNT3 ("current" plug)

- Green "Make before break"
- Green V0

0105 011.10
0199 136.10




- 1st step : the test circuit is established.
- 2nd step : the plug opens the circuit.

M 10/10.ST-Sn				M 10/12,5.STI-Sn				
Color	Type	Part numbers		Color	Type	Part numbers		
Tinned contact blades				Tinned contact blades				
Grey	M 10/10.ST-Sn	0115 539.17		Grey	M 10/12,5.STI-Sn	0115 540.24		
Beige V0	M 10/10.ST-Sn.V0	0195 539.10		Beige V0	M 10/12,5.STI-Sn.V0	0195 540.25		
Characteristics				Characteristics				
Wire size				Wire size				
		NFC DIN	UL	CSA		NFC DIN	UL	CSA
Compression clamp	Solid wire	0,5-16 mm ²		20-8 AWG	Compression clamp	Solid wire	0,5-16 mm ²	20-8 AWG
	Stranded wire	0,5-10 mm ²		20-8 AWG		Stranded wire	0,5-10 mm ²	20-8 AWG
Voltage				Voltage				
Rated		500 V Gr.C		300 V	Rated		500 V Gr.C	300 V
Pulse					Pulse			
Pollution degree					Pollution degree			
Current				Current				
Rated		15 A (1)		10 A	Rated		15 A (1)	10 A
Wire size				Wire size				
Rated / Gauge		10 mm ²		8 AWG	Rated / Gauge		10 mm ²	8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection		Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
12 mm .472"	5,5-6 mm .217" - .236"	1,2-1,4 Nm 10.6-12.3 lb.in			12 mm .472"	5,5-6 mm .217" - .236"	1,2-1,4 Nm 10.6-12.3 lb.in	
Type				Type				
FEMT5	th. 2,5 mm	0116 781.13						
FEMT5V0	th. 2,5 mm	0196 781.14						
BNT1	red	0105 012.11						
BNT1 V0	red	0199 135.17						
BNT2	grey	0114 329.23						
BNT2 V0	beige	0194 329.24						
BNT3	green	0105 011.10		BNT3	green	0105 011.10		
BNT3 V0	green	0199 136.10		BNT3 V0	green	0199 136.10		
CVABM1		0116 783.15		CVABM1		0116 783.15		
BRC (2)		0174 558.05		BRC (2)		0174 558.05		
BRC (2)		0173 906.22		BRC (2)		0173 906.22		
BRC (2)		0173 907.23		BRC (2)		0173 907.23		
BRC (2)		0173 908.04		BRC (2)		0173 908.04		
BRC (2)		0174 601.01		BRC (2)		0174 601.01		
PSC (2)		0173 181.13		PSC (2)		0173 181.13		
PC10	70 A	10 poles	0163 315.26					
AD2,5	24 A		0114 205.20	AD2,5	24 A	0114 205.20		
BJM10	57 A	5 poles	0173 611.21					
BJM10	57 A	4 poles	0173 612.22					
BJM10	57 A	3 poles	0173 613.23					
BJM10	57 A	2 poles	0173 614.24					
BJM10	57 A	10 poles	0173 615.25					
BJM10	57 A	5 poles	0176 678.17					
BJM10	57 A	4 poles	0176 677.06					
BJM10	57 A	3 poles	0176 676.05					
BJM10	57 A	2 poles	0176 675.04					
BJM10	57 A	10 poles	0176 679.10					
CBM5	th. 0,5 mm	0178 745.14		CBM5	th. 0,5 mm	0178 745.14		
CBM8	th. 0,8 mm	0178 746.15		CBM8	th. 0,8 mm	0178 746.15		

(1) (17) (26)
Note : (1) Maximum withstand current.
(2) Crimping and assembly : see section on modular connectors.

M 6/8.ST1


Spacing 8 mm - 0,05 (.315")



M 6/8.ST equipped with two test sockets DIA. 4 mm/.16"

M 6/8.ST2


Spacing 8 mm - 0,05 (.315")



M 6/8.ST with sliding link operated by an insulated rod.

M 6/8.ST3

Spacing 8 mm - 0,05 (.315")



M 6/8.ST2 equipped with two test sockets DIA. 4 mm/.16"

Color	Type	Part numbers
Grey	M 6/8.ST1	0115 237.10
Beige V0	M 6/8.ST1.V0	0195 237.11

Color	Type	Part numbers
Grey	M 6/8.ST2	0115 238.21
Beige V0	M 6/8.ST2.V0	0195 238.22

Color	Type	Part numbers
Grey	M 6/8.ST3	0115 239.22
Beige V0	M 6/8.ST3.V0	0195 239.23

Characteristics

Wire size	NFC DIN		UL	CSA
	Solid wire	Stranded wire		
Compression clamp	0,5-10 mm ²			18-8 AWG
	0,5-6 mm ²			18-8 AWG

Characteristics

Wire size	NFC DIN		UL	CSA
	Solid wire	Stranded wire		
Compression clamp	0,5-10 mm ²			18-8 AWG
	0,5-6 mm ²			18-8 AWG

Characteristics

Wire size	NFC DIN		UL	CSA
	Solid wire	Stranded wire		
Compression clamp	0,5-10 mm ²			18-8 AWG
	0,5-6 mm ²			18-8 AWG

Voltage				
Rated	500 V Gr.C			150 V
Pulse				
Pollution degree				

Voltage				
Rated	500 V Gr.C			150 V
Pulse				
Pollution degree				

Voltage				
Rated	500 V Gr.C			150 V
Pulse				
Pollution degree				

Current				
Rated	30 A			30 A

Current				
Rated	30 A			30 A

Current				
Rated	30 A			30 A

Wire size				
Rated / Gauge	6 mm ² / A5			8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	
13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1	

Wire size				
Rated / Gauge	6 mm ² / A5			8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	
13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1	

Wire size				
Rated / Gauge	6 mm ² / A5			8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	
13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1	

Type		Part numbers
FEMT2	th. 1 mm	0113 629.27
FEMT2 V0	th. 1 mm	0193 629.20
SCFT2		0114 522.05
FC4	DIA. 4 mm	0167 860.01
PC8	2 poles	0116 538.17
PC8	3 poles	0116 539.10
PC8	4 poles	0116 540.25
PC8	10 poles	0163 313.24
AD2,5		0114 205.20
BP8.A4		0173 888.20

Type		Part numbers
FEMT2	th. 1 mm	0113 629.27
FEMT2 V0	th. 1 mm	0193 629.20
SCFT2		0114 522.05
AL4	DIA. 4 mm	0163 240.17
DCO	orange	0173 060.00
FC4	DIA 4 mm	0167 860.01
BJS8	(1) 15 poles	0174 788.04
BJS8	(1) 20 poles	0174 789.05
EV8S	(1)	0168 401.03
PC8	2 poles	0116 538.17
PC8	3 poles	0116 539.10
PC8	4 poles	0116 540.25
PC8	10 poles	0163 313.24
AD2,5		0114 205.20
BP8.A4		0173 888.20

Type		Part numbers
FEMT2	th. 1 mm	0113 629.27
FEMT2 V0	th. 1 mm	0193 629.20
SCFT2		0114 522.05
FC4	DIA. 4 mm	0167 860.01
PC8	2 poles	0116 538.17
PC8	3 poles	0116 539.10
PC8	4 poles	0116 540.25
PC8	10 poles	0163 313.24
AD2,5		0114 205.20
BP8.A4		0173 888.20

(1) (17)

Note : (1) Use of these accessories requires the user to cut out the partition.

(1) (17)

(1) (17)


Terminal blocks for test circuits

Compression clamp

DIN 1 - DIN 3

M 6/8.ST4 M 6/8.ST5


Spacing 8 mm - 0,05 (.315")



M 6/8.ST with partition for jumper bar. Partition on right for M 6/8.ST4, on left for M 6/8.ST5.

M 6/8.ST6

Spacing 8 mm - 0,05 (.315")



M 6/8.ST with partition on right and left for jumper bar.

End stop	th. 9,1 mm	BADL	V0	0199 408.02
End stop	th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Rail	32 x 15	PR122		0163 050.04
Other rails : See Accessories section				

Color	Type	Part numbers	Color	Type	Part numbers
Grey/part.on right	M 6/8.ST4	0115 240.07	Grey	M 6/8.ST6	0115 242.25
Beige V0	M 6/8.ST4.V0	0195 240.00	Beige V0	M 6/8.ST6.V0	0195 242.26
Grey/part.on left	M 6/8.ST5	0115 241.24			
Beige V0	M 6/8.ST5.V0	0195 241.25			

Characteristics				Characteristics					
Wire size				Wire size					
	NFC	DIN	UL	CSA		NFC	DIN	UL	CSA
Compression clamp	Solid wire	0,5-10 mm ²		18-8 AWG	Compression clamp	Solid wire	0-10 mm ²		18-8 AWG
	Stranded wire	0,5-6 mm ²		18-8 AWG		Stranded wire	0-6 mm ²		18-8 AWG

Voltage				Voltage					
Rated		500 V		150 V	Rated		500 V		150 V
Pulse				Pulse					
Pollution degree				Pollution degree					
Current				Current					
Rated		30 A		30 A	Rated		30 A		30 A
Wire size				Wire size					
Rated / Gauge		6 mm ² / A5		8 AWG	Rated / Gauge		6 mm ² / A5		8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection		Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection	
13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1		13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1	

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us. The terminal blocks of the M 6/8.ST series are called test blocks as their main function in current transformer circuits is to be able to test, measure, compare, change protection or metering equipment without disturbing the circuits.

Accessories


	1 End section	grey	FEMT2	th. 1 mm	0113 629.27
		beige	FEMT2 V0	th. 1 mm	0193 629.20
		grey	SCFT2		0114 522.05
	2 Circuit separator		AL4	DIA. 4 mm	0163 240.17
	3 Test socket		DCO	orange	0173 060.00
	4 Test device		FC4	DIA. 4 mm	0167 860.01
	5 Test plug		BJS8	(1) 15 poles	0174 788.04
	6 Jumper bar not assembled		BJS8	(1) 20 poles	0174 789.05
	7 Comb type jumper bar		EV8S	(1)	0168 401.03
	Post + screw + washer		PC8	2 poles	0116 538.17
			PC8	3 poles	0116 539.10
			PC8	4 poles	0116 540.25
			PC8	10 poles	0163 313.24
	8 IDC jumper		AD2,5		0114 205.20
	9 Connection plug		BP8.A4		0173 888.20
	R See section on markers marking method				

Type	Part numbers	Type	Part numbers
FEMT2	th. 1 mm 0113 629.27	FEMT2	th. 1 mm 0113 629.27
FEMT2 V0	th. 1 mm 0193 629.20	FEMT2 V0	th. 1 mm 0193 629.20
SCFT2	0114 522.05	SCFT2	0114 522.05
AL4	DIA. 4 mm 0163 240.17	AL4	DIA. 4 mm 0163 240.17
DCO	orange 0173 060.00	DCO	orange 0173 060.00
FC4	DIA. 4 mm 0167 860.01	FC4	DIA. 4 mm 0167 860.01
BJS8	(1) 15 poles 0174 788.04	BJS8	(1) 15 poles 0174 788.04
BJS8	(1) 20 poles 0174 789.05	BJS8	(1) 20 poles 0174 789.05
EV8S	(1) 0168 401.03	EV8S	(1) 0168 401.03
PC8	2 poles 0116 538.17	PC8	2 poles 0116 538.17
PC8	3 poles 0116 539.10	PC8	3 poles 0116 539.10
PC8	4 poles 0116 540.25	PC8	4 poles 0116 540.25
PC8	10 poles 0163 313.24	PC8	10 poles 0163 313.24
AD2,5	0114 205.20	AD2,5	0114 205.20
BP8.A4	0173 888.20	BP8.A4	0173 888.20

Note : (1) Use of these accessories requires the user to cut out the partition.

M 6/8.ST7


Spacing 8 mm - 0,05 (.315")



M 6/8.ST non interruptible (standard "feed-through" connection).

M 10/10.ST1.V0

Spacing 10 mm (.394")



M10/10.ST equipped with two test sockets DIA. 4 mm

Color	Type	Part numbers
Grey	M 6/8.ST7	0115 243.26
Beige V0	M 6/8.ST7.V0	0195 243.27

Color	Type	Part numbers
Beige V0	M 10/10.ST1.V0	0195 924.02

Characteristics

Wire size	NFC DIN		UL	CSA
	Compression Solid wire	0,5-10 mm ²		
clamp Stranded wire	0,5-6 mm ²			18-8 AWG

Characteristics

Wire size	NFC DIN		UL	CSA
	Compression Solid wire	0,5-16 mm ²		
clamp Stranded wire	0,5-10 mm ²			22-8 AWG

Voltage			
Rated	500 V		150 V
Pulse			
Pollution degree			

Voltage			
Rated	400 V Gr.C		
Pulse	6 KV		
Pollution degree	3		

Current			
Rated	30 A		40 A

Current			
Rated	46 A		

Wire size			
Rated / Gauge	6 mm ² / A5		8 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
13 mm .512"	5 mm .197"	0,8-1 Nm 7.1-8.9 lb.in	IP 20 NEMA 1

Wire size			
Rated / Gauge	10 mm ² / B6		
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
13 mm .512"	5,5-6 mm	1,2-1,4 Nm	







Type		Part numbers
FEMT2	th. 1 mm	0113 629.27
FEMT2 V0	th. 1 mm	0193 629.20
SCFT2		0114 522.05
AL4	DIA. 4 mm	0163 240.17
DCO	orange	0173 060.00
FC4	DIA. 4 mm	0167 860.01
BJS8 (1)	15 poles	0174 788.04
BJS8 (1)	20 poles	0174 789.05
EV8S (1)		0168 401.03
PC8	2 poles	0116 538.17
PC8	3 poles	0116 539.10
PC8	4 poles	0116 540.25
PC8	10 poles	0163 313.24
AD2,5		0114 205.20
BP8.A4		0173 888.20

Type		Part numbers
FEMT2 V0	th. 1 mm	0193 629.20
SCF T2		0114 522.05
FC4	DIA 4 mm	0167 860 .01
AD2,5		0114 205.20
PC10	10 poles	0163 315.26

(1) (17) (26)
Note : (1) Use of these accessories requires the user to cut out the partition.

Terminal blocks for test circuits with insulated sliding bridge


Compression clamp
 DIN 1 - DIN 3

- End stop  th. 9,1 mm **BADL** V0 **0199 408.02**
- End stop  th. 9,1 mm **BAM** **0103 002.26**
- Other end stops : See Accessories section
- Rail  35 x 7,5 x 1 **PR30** prepunched **0173 220.05**
- Rail  35 x 15 x 2,3 **PR4** **0168 500.12**
- Rail  35 x 15 x 1,5 **PR5** prepunched **0101 598.26**
- Rail  32 x 15 **PR1Z2** **0163 050.04**
- Other rails : See Accessories section

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us. The terminal blocks of the **M 6/8.ST** series are called test blocks as their main function in current transformer circuits is to test, measure, compare, change protection or metering equipment without disturbing the circuits.

Accessories

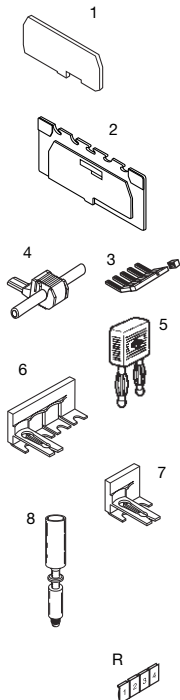


- 1 End section beige
- 2 Circuit separator beige
- 3 Comb type jumper bar
- 4 IDC jumper
- 5 Bridging plug
- 6 Sliding switch bridge 4 poles
- 7 Sliding switch bridge 2 poles
- 8 Test socket screw

R See section on markers marking method

M 6/8.ST1.VO.IP20


Spacing 8 mm - 0,05 (.315")

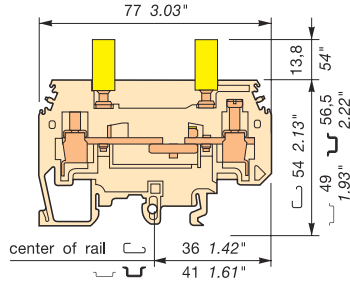



Switch connection by yellow sliding link operated by screw driver, equipped with 2 test socket screws DIA. 4 mm/ .16".

M 6/8.ST.VO.IP20

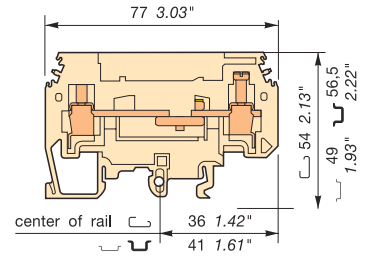Spacing 8 mm - 0,05 (.315")



Switch connection by yellow sliding link operated by screw driver.

CE				CE			
Color	Type	Part numbers		Color	Type	Part numbers	
Beige V0		M 6/8.ST1.VO.IP20	0195 639.24	Beige V0		M 6/8.ST.VO.IP20	0195 640.01

Characteristics

Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-10 mm ²			
clamp Stranded wire	0,5-6 mm ²			

Voltage			
Rated	400 V		
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	30 A		
Wire size			
Rated / Gauge	6 mm ² / A5		
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
13 mm	5 mm	0,8-1 Nm 7.1-8.9 lb-in	IP 20

Characteristics


Wire size	IEC		UL	CSA
	NFC	DIN		
Compression Solid wire	0,5-10 mm ²			
clamp Stranded wire	0,5-6 mm ²			

Voltage			
Rated	400 V		
Pulse	4 kV		
Pollution degree	3		
Current			
Rated	30 A		
Wire size			
Rated / Gauge	6 mm ² / A5		
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
13 mm	5 mm	0,8-1 Nm 7.1-8.9 lb-in	IP 20

Type				Part numbers	Type				Part numbers
FEMT2 V0	V0	th. 1 mm		0193 629.20	FEMT2 V0	V0	th. 1 mm		0193 629.20
SCFT2 V0	V0	th. 1 mm		0194 522.06	SCFT2 V0	V0	th. 1 mm		0194 522.06
PC8		10 poles		0163 313.24	PC8		10 poles		0163 313.24
AD2,5				0114 205.20	AD2,5				0114 205.20
BP8.A4				0173 888.20	BP8.A4				0173 888.20
PCS4	V0	IP 20		0199 870.04	PCS4	V0	IP 20		0199 870.04
PCS2	V0	IP 20		0199 871.21	PCS2	V0	IP 20		0199 871.21
AJS 9				0179 726.02	AJS 9				0179 726.02


Applications : TEST DIAGRAMS OF CURRENT TRANSFORMER (T.I.)

- Normal operation




- ① Terminal block
- ② End section
- ③ Sliding switch bridge

- Protection circuit test (no superposition of current circuits)



- Control of measuring value : (ammeter calibration)



⑪ ⑰

⑪ ⑰


Terminal blocks
for test circuits
with safety connections
Compression clamp
DIN 3

End stop	th. 12,0 mm	BADH	V2	0116 900.27
End stop	th. 9,1 mm	BAM		0103 002.26
Other end stops : See Accessories section				
Rail	35 x 7,5 x 1	PR30	prepunched	0173 220.05
Rail	35 x 15 x 2,3	PR4		0168 500.12
Rail	35 x 15 x 1,5	PR5	prepunched	0101 598.26
Other rails : See Accessories section				

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us. The terminal blocks of the **D 6/8.ST** series are called test blocks as their main function in current transformer circuits is to test, measure, compare, change protection or metering equipment without disturbing the circuits.
The spring loaded clamp prevents extraction of cable in case of loosening of the screw.

Accessories

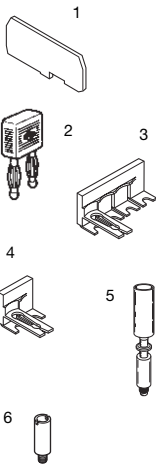
- 1 End section
 - 2 Bridging plug
 - 3 Sliding switch bridge 4 poles
 - 4 Sliding switch bridge 2 poles
 - 5 Test socket screw
 - 6 Test socket
- 



R See section on markers marking method

D 6/8.ST1.RS


Spacing 8 mm - 0,05 (.315")



Switch connection by yellow sliding link operated by screw driver, equipped with 2 test socket screws DIA. 4 mm/.16". Block equipped with pressure spring under the clamp for bare cable or equipped with bent ferrules.

D 6/8.ST.RS

Spacing 8 mm - 0,05 (.315")



Switch connection by yellow sliding link operated by screw driver. Block equipped with a pressure spring under the clamp for bare cable or equipped with bent ferrules.



Color	Type	Part numbers
Grey (V2)	D 6/8.ST1.RS	0115 831.04

Color	Type	Part numbers
Grey V2	D 6/8.ST.RS	0115 914.07

Characteristics

Wire size	Wire size		
	IEC	B.S.	CSA
NFC DIN	TS 50-18		
Compression Solid wire	0,5-10 mm ²		
clamp Stranded wire	0,5-6 mm ²		
Lugs		0,28-2,5 mm ²	

Characteristics

Wire size	Wire size		
	IEC	B.S.	CSA
NFC DIN	TS 50-18		
Compression Solid wire	0,5-10 mm ²		
clamp Stranded wire	0,5-6 mm ²		
Lugs		0,28-2,5 mm ²	

Voltage			
Rated	400 V		
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	24 A		
Wire size			
Rated / Gauge	6 mm ² / A5	2,5 mm ²	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
16 mm	5 mm	0,8-1 Nm 7.1-8.9 lb-in	IP 20


Voltage			
Rated	400 V		
Pulse	6 kV		
Pollution degree	3		
Current			
Rated	24 A		
Wire size			
Rated / Gauge	6 mm ² / A5	2,5 mm ²	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
16 mm	5 mm	0,8-1 Nm 7.1-8.9 lb-in	IP 20

Type	Part numbers		
FEM8T6 V2 th. 1 mm	0215 266.01		
BP8.A4	0173 888.20		
PCS4 V0 IP 20	0199 870.04		
PCS2 V0 IP 20	0199 871.21		
AL4 NO IP 20 Ø 4,0 mm	0163 240.17		

Type	Part numbers		
BP8.A4	0173 888.20		
PCS4 V0 IP 20	0199 870.04		
PCS2 V0 IP 20	0199 871.21		
AJS 9	0179 726.02		
AL4 NO IP 20 Ø 4,0 mm	0163 240.17		


Applications : TEST DIAGRAMS OF CURRENT TRANSFORMER (T.I.)

- Normal operation




- ① Terminal block
- ② End section
- ③ Sliding switch bridge

- Protection circuit test (no superposition of current circuits)




- Control of measuring value : (ammeter calibration)




Terminal blocks for test circuits


Compression clamp (applications)

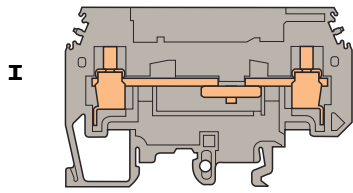


I M 6/8.ST 0115 236.17

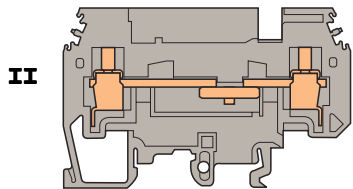

II M 6/8.ST4 0115 240.07

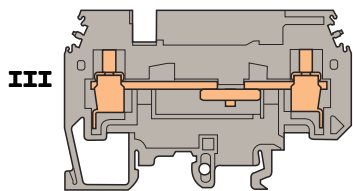

III M 6/8.ST5 0115 241.24

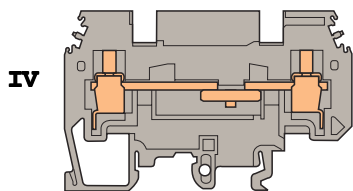

IV M 6/8.ST6 0115 242.25


The terminal blocks of the **M6/8.ST** series are called test blocks as their main function in current transformer circuits is to be able to test, measure, compare, change protection or metering equipment without disturbing the circuits.

The following examples illustrate some of the possibilities.


C.T. test diagram

Mounting A


Control of the value of measure (comparative tests)



Protection circuit test (no superposition of current circuits)




Test diagram of circuit with various equipments




C.T. test diagram in a circuit with various equipment

Mounting B


Normal service




Control of the value of measure (comparative tests)




Replacement of equipment



Relay tests




DC transformer



Current transformers with common point


Mounting C

Current transformers data mounting



Mounting D


Current transformers with star mounting

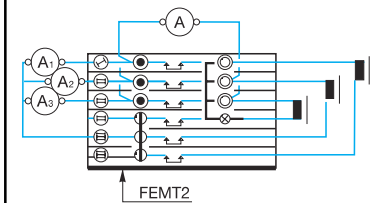

Terminal blocks	Type	Part numbers	Mounting A	Mounting B	Mounting C	Mounting D
I	M 6/8.ST	0115 236.17	1	1	1	1
II	M 6/8.ST4	0115 240.07	1	2	1	3
III	M 6/8.ST5	0115 241.24		1	2	2
IV	M 6/8.ST6	0115 242.25			2	
Accessories	Type	Part numbers	Mounting A	Mounting B	Mounting C	Mounting D
End section grey	FEMT2	th.1 mm 0113 629.27	1	1	1	1
⊙ Test socket screw + post	AJS1	0167 801.23		2	6	3
⊙ Standard pivoting bridge + test socket	AJS2	0167 802.24	1	1		
○ Screw + post	AJS3	0167 803.25	1	1		3
⊙ Standard pivoting bridge	AJS4	0167 804.26		2	3	
⊙ Triple sliding bridge	AJS5	0167 805.27				1
● Test socket	AL4	DIA.4 mm 0163 240.17	2	1		3
— Jumper bar	BJS83	3 poles 0164 582.14				1
— Jumper bar	BJS85	5 poles 0164 737.26			1	


Accessories

Test socket screw + post




AJS1 **0167 801.23**

Standard pivoting bridge + test socket screw




AJS2 **0167 802.24**

Screw + post




AJS3 **0167 803.25**

Standard pivoting bridge




AJS4 **0167 804.26**

Triple sliding bridge



AJS5 **0167 805.27**

Triple sliding bridge + test socket screw + post

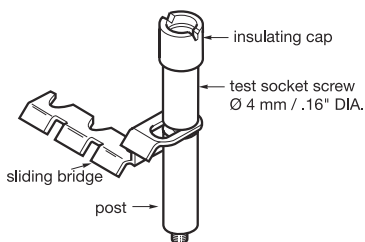

AJS7 **0176 293.26**


Possible combinations

BJP Pivoting jumper bar

These accessories are screwed in the tapped holes of the connector bars of two adjacent terminal blocks.

BJP.A1

Unit used for interconnection of two blocks, by pivoting connection, with possibility of test (plug DIA. 4 mm/.16") on the block not having the pivoting bar.




AJS1 **0167 801.23**

AJS4 **0167 804.26**

BJP.A2

Unit used for interconnection of two blocks, by pivoting connection, with possibility of test (plug DIA. 4 mm/.16") on the block having the pivoting bar.




AJS3 **0167 803.25**

AJS2 **0167 802.24**

BJP.E

Unit used for interconnection of two blocks, by pivoting connection.




AJS3 **0167 803.25**

AJS4 **0167 804.26**

BJP.2A

Unit used for interconnection of two blocks, by pivoting connection, with possibility of test (plug DIA. 4 mm/.16") on both blocks.



AJS1 **0167 801.23**


AJS2 **0167 802.24**

BJC Sliding jumper bar

These accessories are screwed in the tapped holes of the connector bars of four adjacent terminal blocks.

BJC.3

Unit used for interconnection of four blocks, by sliding connection.




Qty : 3 **AJS3** **0167 803.25**

Qty : 1 **AJS5** **0167 805.27**

BJC.3A

Unit used for interconnection of four blocks, by sliding connection, with possibility of test (plug DIA. 4 mm/.16") on the three blocks not having the sliding bar.




Qty : 3 **AJS1** **0167 801.23**

Qty : 1 **AJS5** **0167 805.27**

BJC.3B

Unit used for interconnection of four blocks, by sliding connection, with possibility of test (plug DIA. 4 mm/.16") on the four blocks.



Qty : 3 **AJS1** **0167 801.23**

Qty : 1 **AJS7** **0176 293.26**

ESSAILEC terminal blocks

Current, voltage or polarity circuits
10, 20, 22, 30 pole multi-circuits


ESSAILEC blocks are used to supply power in serial or branch circuits for monitoring, counting, protection and automatic control devices, without disturbing the operating circuits.

Type "C"

C

Current circuit Essailec blocks

Connected to the secondary circuits of current transformers, these blocks are used to supply current to protect, automatic control systems, measuring and counting devices. A mobile contact prevents the opening of the secondary circuits of current transformers when the plug is removed.

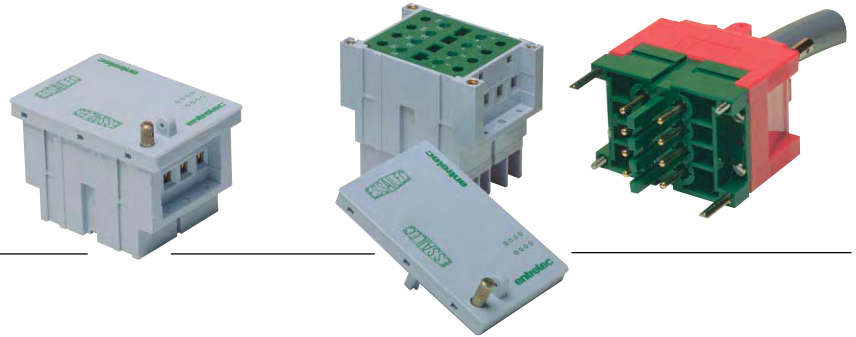


Type "T"

T

Voltage circuit Essailec blocks

Connected to the secondary circuits of voltage transformers, these blocks are used to supply voltage to protect, automatic control systems, measuring and counting devices.

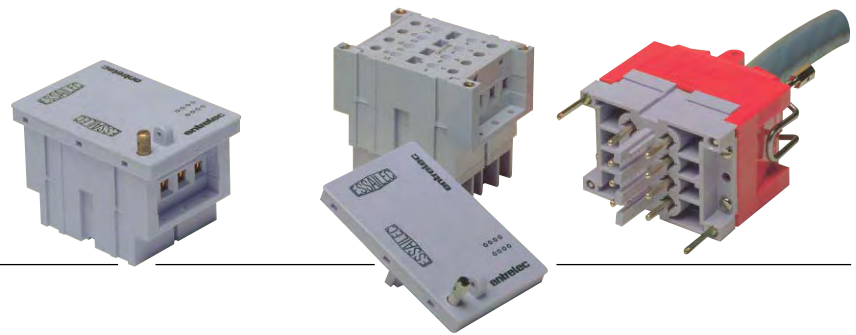


Type "P"

P

Polarity circuits Essailec blocks

Connected to polarity circuits, these blocks are used to distribute polarity.

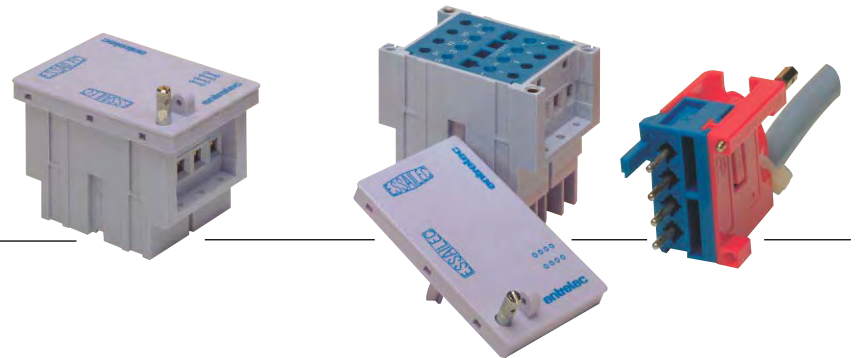


Type "M"

M

Multi-circuit Essailec blocks

Blocks with 10, 20, 22 or 30 poles used for wiring panels.

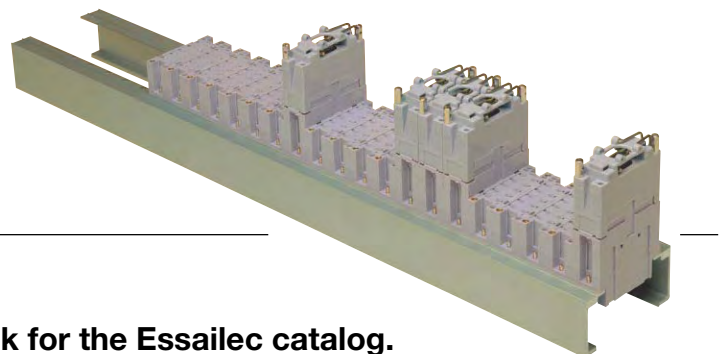

For more information, ask for the Essailec catalog.