



"Stubby" Press Fit

With Wire Leads

1125 Series

Overview

The 1125 Series "Stubby" Press Fit Magnetic Contact is a $\frac{3}{8}$ " diameter switch designed specifically for applications where space is limited. The 1125 Series' short length makes it ideal for thin framed windows and doors where longer units cannot be used. Press fit ribs on the housing make for quick, easy installation.

Architectural and Engineering Specifications

Switch is a hermetically-sealed reed switch, which is potted using exclusive polyurethane potting compound into the switch housing. Switch and Alnico V magnet is drill-mounted in wood or aluminum with a suitable adhesive. The switch and magnet housing have three fins to press-fit against the mounting hole. Nominal switch dimensions are $.38$ " (0.95cm) diameter x $.75$ " (1.91cm) or 1.25 " (3.18cm) in length. Magnet is $.38$ " (0.95cm) diameter x $.75$ " (1.91cm) or 1.31 " (3.33cm) in length. Color is white or mahogany brown. Switch and magnet shall be specified as part number 1125 or 1125W for wide gap.



Standard Features

- Small size
- Ideal for pre-wire installations
- Wide gap available

Model Numbers

1125, 1125W


"Stubby" Press Fit

With Wire Leads


1125 Series

Dimensions

Standard

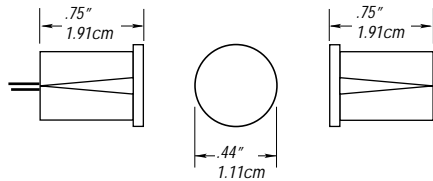

Wide Gap

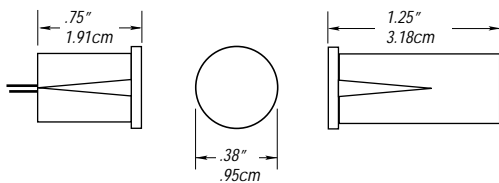

Specifications

Form A

Voltage

100V AC/DC max

Current

0.5A max

Power

7.5W max

Ordering Information

Model	Loop Type	Electrical Configuration	Hole Required	Gap Distance*	Lead Type
1125	Closed	N.O.	White, Mahogany brown	up to 1/4"	12" #22 Wire
1125W	Closed	N.O.	White, Mahogany brown	up to 3/4"	12" #22 Wire

* Gap distances are nominal make distance $\pm 20\%$. Gap specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.



GE Interlogix