



Surface Mount

With Terminals

1138T

Overview

The 1138T surface mount contact with terminals is designed for window or door applications where a surface mount contact is preferred. Thanks to its unique design, the 1138T is fast and easy to install. The switch and magnet are incorporated into the housings. Simply mount the switch and magnet using the tape or mounting screws provided and connect the wire to the terminal blocks. The 1138T features an attractive, low-profile design and a 1" operating gap.

Architectural and Engineering Specifications

The contact contains a hermetically sealed magnetic reed switch. Connection to the contact is made through a 3mm screw terminal block. The contact and magnet can be mounted with either 3M adhesive tape or #4 by 1/2" screws, both provided. Contact and magnet are nominal 2.00" (5.08cm) L x .40" (1.02cm) W x .34 (.85cm) D and mount on 1.75" (4.45cm) centers. Colors are specified as either white or mahogany brown. Contact is GE Interlogix product number 1138T.

Installation Instructions

Align and attach switch and magnet using tape or screws provided. Strip protective loop wire, twist (if using standard wire), and insert into screw terminals and tighten screws.



Standard Features


- Simple to install
- Attractive low-profile design
- 1" gap distance
- Larger terminal screws - no mini screwdrivers

Surface Mount

With Terminals

1138T

Dimensions

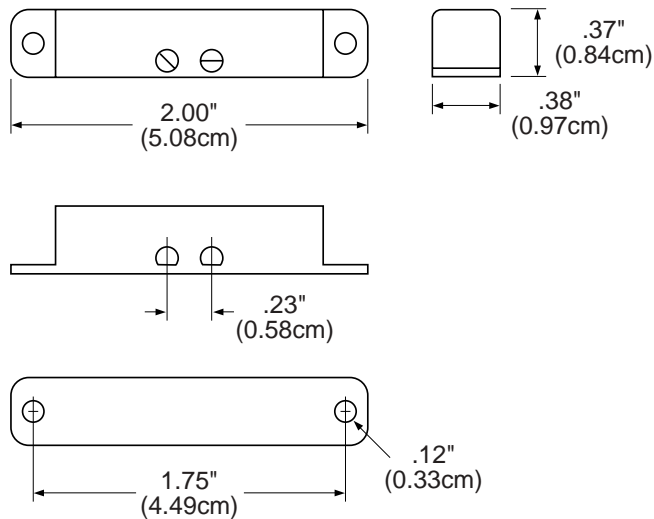

Specifications

Form A (1138T)

Voltage 30V AC/DC max
Current 0.5A max
Power 7.5W max

Dimensions 2.00" (5.08cm) L
 0.40" (1.02cm) W
 0.34" (0.85cm) D

Warning! Each electrical rating is an individual maximum and cannot be exceeded!



Ordering Information

Model	Description	Electrical Configuration	Gap Distance	Colors
1138T	Closed Loop	N.O.	1"	White, mahogany brown
1838T	Magnet			White, mahogany brown
1938T	Spacer			White, mahogany brown



GE Interlogix