

Portacal 275

Hand-held signal source and loop calibrator

The Portacal 275 is a precise hand-held signal source for current and voltage signals. It can be used in four modes which allows the calibration of standard current/voltage transmitters.

The operating mode „voltage source“ simulates auxiliary-powered transmitters with proportional voltage outputs. The mode „current source“ allows emulation of transmitters with proportional current outputs. The „mv source“ mode simulates a variety of other analogue signals from many different applications. The „current sink“ mode simulates the outputs of a two-wire (loop powered) transmitter.

The Portacal 275 is equipped with a scalable potentiometer (0 to 100%) that can be adjusted in steps to an accuracy of 0.1%. Together with the output-range switch, the potentiometer allows for a quick and precise adjustment of the signal value. A typical accuracy of $\pm 0.25\%$ is possible. An integrated test point, for connecting external measurement devices, allows for a higher accuracy of $\pm 0.1\%$.


Technical features:

- Light and portable device
- Simulates loop-powered transmitter operation
- LED for indication of source/sink operating mode
- Current ranges: 0 to 20 mA / 4 to 20 mA /
Voltage ranges: 0 to 5 V / 1 to 5 V / 0 to 200 mV
- 0.1 % accurate current source
- Test points for current output monitoring
- Switch select 0 %, 100 % or variable output
- Signal outputs can be adjusted with spindle potentiometer for high accuracy
- Powered from two 9 V block batteries

Portacal 275

Calibration device for current and voltage signals

Portacal 275

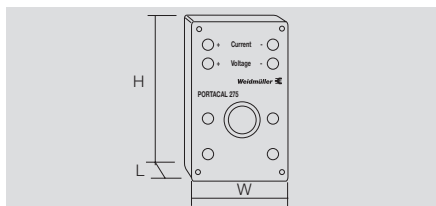

Technical data

Output of voltage mode	
Output voltage	0...5 V / 1...5 V; 0...200 mV / 40...200 mV
Resolution	0.01 V
Output resistance	250 Ω @ V / 10 Ω @ mV
Accuracy	< 0.2 % (0 % and 100 %)
Output current mode	
Output current	0 (4)...20 mA
Resolution	0.01 mA
Last resistor, max.	700 Ω (current source) (V _{out} - 4) / 0.02 Ω (current sink)
Output voltage, max. @ current sink	4...45 V DC
Accuracy	< 0.1 % (0 % and 100 %)
Residual ripple	< 1 μA
Settings	
Range of adjustment	0 (4)...20 mA / 0...200 mA (current source), 0...5 V (voltage source) or as current sink selectable with toggle switch 0...100 % with precision potentiometer 0 or 100 % with toggle switch
General data	
Temperature coefficient	typ. 40 ppm @ °C
Accuracy	0.25 % of signal range
Supply voltage	Batteries, 2 x 9-V blocks 6...22 mA (current source) 2 mA (current sink)
Ambient temperature	0 °C...+60 °C
Storage temperature	-25 °C...+70 °C
Type of connection	Sockets
EMC standards	DIN EN 61326
Approvals	cULus; CE

Dimensions	
Length x width x height	mm
	31 / 62 / 112

Note	
	Including 2 x 1m test lead sw/rt with banana plug/clip and 1 x bridge lead

Ordering data

Connection system	Type	Qty.	Order No.
	P275	1	7940010202

Note	

Accessories

--	--

Wiring diagram

