



SENTROL

1045T Series Industrial Surface Mount With Terminals Magnetic Contacts

Gap distance	Closed loop	SPDT
3"	1042TW	1044TW
1 1/4 "	1045T	1047T

Color	Natural	Mahogany brown
Quantity	5	



1045T-M



100% TESTED




0 46188 01247 3

1045T Series Magnetic Contacts Industrial Surface Mount With Terminals

Installation Instructions

1042TW, 1044TW, 1045T, 1047T

Select desired mounting positions for contact and magnet. Align labels on contact and magnet so labels read in same direction.

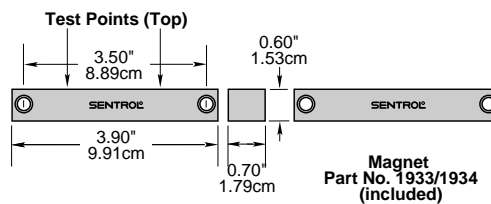

UL Specifications

** European Union Specification: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance Make*
1042TW	Closed	N.O.	3"
1044TW	Open or Closed	SPDT	3"
1045T	Closed	N.O.	1 1/4"
1047T	Open or Closed	SPDT	1 1/4"

**FORM A (1042TW, 1045T)

Voltage: 100 VAC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

FORM C (1044TW, 1047T)

Voltage: 30 VAC/DC Max

Current: 0.25 A Max

Power: 3.0 W Max

* Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

ULC Specifications

All Contacts: 30 VDC, 50 ma max.

Gap Specifications:*

See UL Gap Specifications

interlogix

SECURITY & LIFE SAFETY GROUP

PK-0999 Rev F 10/01