


# 1275 series recessed magnetic contacts

recessed wing fit magnetic contacts with wire leads  
3/8 in. dia.

The 1275 series Wing Fit™ magnetic contacts are ideal for new construction applications, where wood swell poses a potential threat to the contact housing. The wings on the 1275 series flex to hold the contact securely in place as the wood expands and contracts.

The 1-inch contact fits most recessed applications. The 1275 housing is constructed of heavy duty plastic. A wide gap model offers added protection for loose-fitting doors and windows.

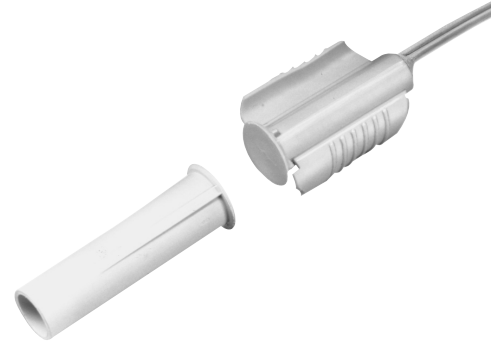


## Specifications

Voltage:	1275/1275W: 100 VAC/VDC max. 1277: 30 VAC/VDC max.
Current:	1275/1275W: 0.5 A max. 1277: 0.25 A max.
Power:	1275/1275W: 7.5 W max. 1277: 3.0 W max.
Loop type:	1275/1275W: Closed 1277: Open or closed
Electrical configuration:	1275/1275W: Normally open 1277: SPDT
Gap distance:	1275/1277: Up to 1/2 in. 1275W: Up to 1-1/4 in.
Lead type:	1 ft. #22 wire
Lead colors:	1277: Black-common; white-closed loop; red-open loop
Dimensions:	1.313 in. L x 0.375 in. dia. (33 x 9.5 mm)
Housing:	Flame retardant ABS plastic
Color:	White
Regulatory:	UL

- Conforms to angled, misaligned, or irregular holes
- Wings protect contact reed from being crushed by swelling wood
- Shorter switch body for easy pre-wiring
- Available wider gap distance helps prevent false alarms caused by loose-fitting doors and windows

## Ordering information

1275N-10PKG	Recessed wing fit magnetic contact with wire leads, 3/8 in. dia., 1/2 in. gap size, closed loop, white, pk/10
1275WN-10PKG	Recessed wing fit magnetic contact with wire leads, 3/8 in. dia., wide gap, 1-1/4 in. gap size, closed loop, white, pk/10
1277N-10PKG	Recessed wing fit magnetic contact with wire leads, 3/8 in. dia., 1/2 in. gap size, SPDT, white, pk/10
1924N-10PKG	Magnet for 1275 series, white, pk/10

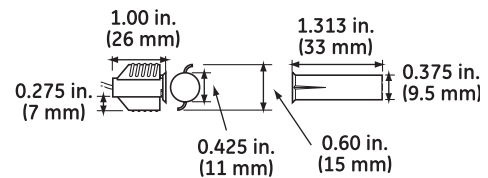

Note: Wings compress to 0.375 in. (9.5 mm) dia.