

15 Amp - Rack Panel Mount (Front Mounted Receptacles)

1582 Series



Key Features

- Designed for power distribution from the front of the unit
- Available with lighted on/off switch or red pilot light to indicate power on(see tables below).
- Available in ASA 61 grey or black powder coat finish.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug types available are NEMA 5-15P straight blade or NEMA L5-15P twist-lock.
- Includes 15 Amp, 125 VAC circuit breaker to prevent accidental overload.
- 6 outlet models include 2 outlets with extra spacing for clearance of most plug in transformers (see photo above).
- Panel dimensions are 1.75" high (1U) and 19" rack width.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL recognized, Standard UL1363
- Surge Protected models also available - please see the 1582 "S" models on [page 26](#)



Rack Mount Outlet Strips

Part No.	Color	Outlets	On-Off Switch	Pilot Light	Cord Length	Plug Type
1582H6A1	ASA 61 Grey	6	Yes	-	6'	Straight
1582H6B1	ASA 61 Grey	6	Yes	-	15'	Straight
1582H6C1	ASA 61 Grey	6	Yes	-	6'	Twist-Lock
1582H6D1	ASA 61 Grey	6	Yes	-	15'	Twist-Lock
1582H6A1BK	Black	6	Yes	-	6'	Straight
1582H6B1BK	Black	6	Yes	-	15'	Straight
1582H6C1BK	Black	6	Yes	-	6'	Twist-Lock
1582H6D1BK	Black	6	Yes	-	15'	Twist-Lock
1582H8A1	ASA 61 Grey	8	Yes	-	6'	Straight
1582H8B1	ASA 61 Grey	8	Yes	-	15'	Straight
1582H8C1	ASA 61 Grey	8	Yes	-	6'	Twist-Lock
1582H8D1	ASA 61 Grey	8	Yes	-	15'	Twist-Lock
1582H8A1BK	Black	8	Yes	-	6'	Straight
1582H8B1BK	Black	8	Yes	-	15'	Straight
1582H8C1BK	Black	8	Yes	-	6'	Twist-Lock
1582H8D1BK	Black	8	Yes	-	15'	Twist-Lock
1582T6A1	ASA 61 Grey	6	-	Yes	6'	Straight
1582T6B1	ASA 61 Grey	6	-	Yes	15'	Straight
1582T6C1	ASA 61 Grey	6	-	Yes	6'	Twist-Lock
1582T6D1	ASA 61 Grey	6	-	Yes	15'	Twist-Lock
1582T6A1BK	Black	6	-	Yes	6'	Straight
1582T6B1BK	Black	6	-	Yes	15'	Straight
1582T6C1BK	Black	6	-	Yes	6'	Twist-Lock
1582T6D1BK	Black	6	-	Yes	15'	Twist-Lock
1582T8A1	ASA 61 Grey	8	-	Yes	6'	Straight
1582T8B1	ASA 61 Grey	8	-	Yes	15'	Straight
1582T8C1	ASA 61 Grey	8	-	Yes	6'	Twist-Lock
1582T8D1	ASA 61 Grey	8	-	Yes	15'	Twist-Lock
1582T8A1BK	Black	8	-	Yes	6'	Straight
1582T8B1BK	Black	8	-	Yes	15'	Straight
1582T8C1BK	Black	8	-	Yes	6'	Twist-Lock
1582T8D1BK	Black	8	-	Yes	15'	Twist-Lock

15 Amp - Rack Panel Mount (Rear Mounted Receptacles)

1583 Series



Key Features

- Designed for power distribution from the rear of the unit.
- With lighted on/off switch or red pilot light (see tables below) to indicate power on.
- Available in ASA 61 grey or black powder coat finish.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug types available are NEMA 5-15P straight blade or NEMA L5-15P twist-lock (see table & pictures below).
- Includes 15 Amp, 125 VAC circuit breaker to prevent accidental overload.
- 6 outlet models include 2 outlets with extra spacing for clearance of most plug in transformers.
- Panel dimensions are 1.75" high (1U) and 19" width
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL recognized, Standard UL1363
- Surge Protected models also available - please see the 1583 "S" models on [page 27](#)



Rack Mount Outlet Strips

Part No.	Color	Outlets	On-Off Switch	Cord Length	Plug Type
1583H6A1	ASA 61 Grey	6	Yes	6'	Straight
1583H6B1	ASA 61 Grey	6	Yes	15'	Straight
1583H6C1	ASA 61 Grey	6	Yes	6'	Twist-Lock
1583H6D1	ASA 61 Grey	6	Yes	15'	Twist-Lock
1583H6A1BK	Black	6	Yes	6'	Straight
1583H6B1BK	Black	6	Yes	15'	Straight
1583H6C1BK	Black	6	Yes	6'	Twist-Lock
1583H6D1BK	Black	6	Yes	15'	Twist-Lock
1583H8A1	ASA 61 Grey	8	Yes	6'	Straight
1583H8B1	ASA 61 Grey	8	Yes	15'	Straight
1583H8C1	ASA 61 Grey	8	Yes	6'	Twist-Lock
1583H8D1	ASA 61 Grey	8	Yes	15'	Twist-Lock
1583H8A1BK	Black	8	Yes	6'	Straight
1583H8B1BK	Black	8	Yes	15'	Straight
1583H8C1BK	Black	8	Yes	6'	Twist-Lock
1583H8D1BK	Black	8	Yes	15'	Twist-Lock
1583T6A1	ASA 61 Grey	6	No	6'	Straight
1583T6B1	ASA 61 Grey	6	No	15'	Straight
1583T6C1	ASA 61 Grey	6	No	6'	Twist-Lock
1583T6D1	ASA 61 Grey	6	No	15'	Twist-Lock
1583T6A1BK	Black	6	No	6'	Straight
1583T6B1BK	Black	6	No	15'	Straight
1583T6C1BK	Black	6	No	6'	Twist-Lock
1583T6D1BK	Black	6	No	15'	Twist-Lock
1583T8A1	ASA 61 Grey	8	No	6'	Straight
1583T8B1	ASA 61 Grey	8	No	15'	Straight
1583T8C1	ASA 61 Grey	8	No	6'	Twist-Lock
1583T8D1	ASA 61 Grey	8	No	15'	Twist-Lock
1583T8A1BK	Black	8	No	6'	Straight
1583T8B1BK	Black	8	No	15'	Straight
1583T8C1BK	Black	8	No	6'	Twist-Lock
1583T8D1BK	Black	8	No	15'	Twist-Lock

15 Amp - Rack Panel Mount

1583 "X" Series



Front View



Rear View

Rack Mount Outlet Strips

Key Features

- Designed for power distribution from both the front and rear of the unit.
- Available with lighted on/off switch or red pilot light to indicate power on.
- Available in black powder coat finish.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug types available are NEMA 5-15P straight blade or NEMA L5-15P twist-lock (see table below).
- Includes 15 Amp, 125 VAC circuit breaker to prevent accidental overload.
- Panel dimensions are 1.75" high (1U) and 19" rack width.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL recognized, Standard UL1363



Part No.	Total Outlets	Front Outlets	Rear Outlets	On-Off Switch	Pilot Light	Cord Length	Plug Type
1583H6A1BKX	6	2	4	Yes	-	6'	Straight
1583H6B1BKX	6	2	4	Yes	-	15'	Straight
1583H6C1BKX	6	2	4	Yes	-	6'	Twist-Lock
1583H6D1BKX	6	2	4	Yes	-	15'	Twist-Lock
1583T6A1BKX	6	2	4	-	Yes	6'	Straight
1583T6B1BKX	6	2	4	-	Yes	15'	Straight
1583T6C1BKX	6	2	4	-	Yes	6'	Twist-Lock
1583T6D1BKX	6	2	4	-	Yes	15'	Twist-Lock
1583H12A1BKX	12	6	6	Yes	-	6'	Straight
1583H12B1BKX	12	6	6	Yes	-	15'	Straight
1583H12C1BKX	12	6	6	Yes	-	6'	Twist-Lock
1583H12D1BKX	12	6	6	Yes	-	15'	Twist-Lock
1583T12A1BKX	12	6	6	-	Yes	6'	Straight
1583T12B1BKX	12	6	6	-	Yes	15'	Straight
1583T12C1BKX	12	6	6	-	Yes	6'	Twist-Lock
1583T12D1BKX	12	6	6	-	Yes	15'	Twist-Lock

15 Amp (90° Offset) - Rack Panel Mount

1582 & 1583 "RA" Series

Key Features

- Receptacles turned 90° to allow space for wall transformers, spaced 2.0" apart (center to center).
- Designed for power distribution from front OR rear of the unit.
- Available with lighted on/off switch or red pilot light to indicate power on (see tables below).
- Available in black powder coat finish.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug types available are NEMA 5-15P straight blade or NEMA L5-15P twist-lock.
- Includes 15 Amp, 125 VAC circuit breaker to prevent accidental overload.
- Panel dimensions are 1.75" high (1U) and 19" rack width.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL recognized, Standard UL1363



Part No.	Total Outlets	Outlets Location	On-Off Switch	Pilot Light	Cord Length	Plug Type
1582H6A1BKRA	6	Front	Yes	-	6'	Straight
1582H6B1BKRA	6	Front	Yes	-	15'	Straight
1582H6C1BKRA	6	Front	Yes	-	6'	Twist-Lock
1582H6D1BKRA	6	Front	Yes	-	15'	Twist-Lock
1582T6A1BKRA	6	Front	-	Yes	6'	Straight
1582T6B1BKRA	6	Front	-	Yes	15'	Straight
1582T6C1BKRA	6	Front	-	Yes	6'	Twist-Lock
1582T6D1BKRA	6	Front	-	Yes	15'	Twist-Lock
1583H6A1BKRA	6	Rear	Yes	-	6'	Straight
1583H6B1BKRA	6	Rear	Yes	-	15'	Straight
1583H6C1BKRA	6	Rear	Yes	-	6'	Twist-Lock
1583H6D1BKRA	6	Rear	Yes	-	15'	Twist-Lock
1583T6A1BKRA	6	Rear	-	Yes	6'	Straight
1583T6B1BKRA	6	Rear	-	Yes	15'	Straight
1583T6C1BKRA	6	Rear	-	Yes	6'	Twist-Lock
1583T6D1BKRA	6	Rear	-	Yes	15'	Twist-Lock

International (IEC) - Rack Panel Mount

1582 "E" Series

Key Features

- Designed for use with IEC power cords
- All steel housing with black powder coat finish
- One IEC 320 - C14 inlet, and 8 IEC 320 - C13 outlets
- Standard 19" rack mount
- Designed for power distribution from front of unit
- On-Off switch is rocker type with green light (on those units with on-off switch - listed below) or a green pilot light to indicate power on.
- Includes 10A, 230VAC circuit breaker to prevent accidental line overload
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL listed, Standards UL60950 & CSA C22.2 No. 60950
- TÜV-GS certified, Standards EN60335-1 and EN60950-1
- CE certified #AN 72031916 0001



Part No.	Outlets	Outlet Location	Inlet Location	On-Off Switch	Pilot Light	Dimensions (Inches)	Electrical Rating	Ship Wt.
1582H8E1BK	8	Front	Rear	Yes	-	19 x 3 x 2	230VAC /10A	4.0 lbs
1582T8E1BK	8	Front	Rear	-	Yes	19 x 3 x 2	230VAC /10A	4.0 lbs
1583H8E1BK	8	Rear	Rear	Yes	-	19 x 3 x 2	230VAC /10A	4.0 lbs
1583T8E1BK	8	Rear	Rear	-	Yes	19 x 3 x 2	230VAC /10A	4.0 lbs

Rack Mount Outlet Strips

20 Amp - Rack Panel Mount

1589 "RF & RR" Series



Key Features

- Designed for power distribution from front OR rear of the unit.
- Available with on/off switch or red pilot light to indicate power on (see table below).
- Available in black powder coat finish.
- Heavy 12 gauge wire cord - 12/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Heavy-duty black receptacles rated for 20A, 125VAC service (NEMA 5-20R, Single T-Slot).
- Plug types available are NEMA 5-20P straight blade or NEMA L5-20P twist-lock (see table below).
- Includes 20 Amp, 125 VAC circuit breaker to prevent accidental overload.
- Panel dimensions are 1.75" high (1U) and 19" rack width.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL recognized, Standard UL1363



Rack Mount Outlet Strips

Part No.	Total Outlets	Outlets Location	On-Off Switch	Pilot Light	Cord Length	Plug Type	Dimensions (Inches)
1589H6C1BKRF	6	Front	Yes	-	6'	Twist-Lock	19 x 3 x 1.75
1589H6D1BKRF	6	Front	Yes	-	15'	Twist-Lock	19 x 3 x 1.75
1589H6F1BKRF	6	Front	Yes	-	6'	Straight	19 x 3 x 1.75
1589H6G1BKRF	6	Front	Yes	-	15'	Straight	19 x 3 x 1.75
1589T6C1BKRF	6	Front	-	Yes	6'	Twist-Lock	19 x 3 x 1.75
1589T6D1BKRF	6	Front	-	Yes	15'	Twist-Lock	19 x 3 x 1.75
1589T6F1BKRF	6	Front	-	Yes	6'	Straight	19 x 3 x 1.75
1589T6G1BKRF	6	Front	-	Yes	15'	Straight	19 x 3 x 1.75
1589H6C1BKRR	6	Rear	Yes	-	6'	Twist-Lock	19 x 3 x 1.75
1589H6D1BKRR	6	Rear	Yes	-	15'	Twist-Lock	19 x 3 x 1.75
1589H6F1BKRR	6	Rear	Yes	-	6'	Straight	19 x 3 x 1.75
1589H6G1BKRR	6	Rear	Yes	-	15'	Straight	19 x 3 x 1.75
1589T6C1BKRR	6	Rear	-	Yes	6'	Twist-Lock	19 x 3 x 1.75
1589T6D1BKRR	6	Rear	-	Yes	15'	Twist-Lock	19 x 3 x 1.75
1589T6F1BKRR	6	Rear	-	Yes	6'	Straight	19 x 3 x 1.75
1589T6G1BKRR	6	Rear	-	Yes	15'	Straight	19 x 3 x 1.75
1589H8C1BKRF	8	Front	Yes	-	6'	Twist-Lock	19 x 3 x 1.75
1589H8D1BKRF	8	Front	Yes	-	15'	Twist-Lock	19 x 3 x 1.75
1589H8F1BKRF	8	Front	Yes	-	6'	Straight	19 x 3 x 1.75
1589H8G1BKRF	8	Front	Yes	-	15'	Straight	19 x 3 x 1.75
1589T8C1BKRF	8	Front	-	Yes	6'	Twist-Lock	19 x 3 x 1.75
1589T8D1BKRF	8	Front	-	Yes	15'	Twist-Lock	19 x 3 x 1.75
1589T8F1BKRF	8	Front	-	Yes	6'	Straight	19 x 3 x 1.75
1589T8G1BKRF	8	Front	-	Yes	15'	Straight	19 x 3 x 1.75
1589H8C1BKRR	8	Rear	Yes	-	6'	Twist-Lock	19 x 3 x 1.75
1589H8D1BKRR	8	Rear	Yes	-	15'	Twist-Lock	19 x 3 x 1.75
1589H8F1BKRR	8	Rear	Yes	-	6'	Straight	19 x 3 x 1.75
1589H8G1BKRR	8	Rear	Yes	-	15'	Straight	19 x 3 x 1.75
1589T8C1BKRR	8	Rear	-	Yes	6'	Twist-Lock	19 x 3 x 1.75
1589T8D1BKRR	8	Rear	-	Yes	15'	Twist-Lock	19 x 3 x 1.75
1589T8F1BKRR	8	Rear	-	Yes	6'	Straight	19 x 3 x 1.75
1589T8G1BKRR	8	Rear	-	Yes	15'	Straight	19 x 3 x 1.75

15 & 20 Amp - Industrial/Commercial Grade (with Ammeter)

1583 & 1589 "AM" Series



Front View



Rear View

Key Features

- Designed for power distribution from the rear of the unit.
- Unit includes easy to read 0.37" high red LED ammeter (1.38" x 0.88" display).
- Ammeter accuracy +/- 0.1 Amps
- Available with lighted on/off switch or red pilot light to indicate power on (see tables below). 20 Amp units have a multi-colored rocker switch.
- Available in black powder coat finish.
- The 15 amp. series uses heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded NEMA 5-15P straight blade plug.
- The 20 amp. series uses heavy 12 gauge wire cord - 12/3 SJT or SJTW for extreme temperature ranges and integral NEMA 5-20P straight blade or L5-20P twist-lock molded plug.
- Includes 15 or 20 Amp, 125 VAC circuit breaker to prevent accidental overload.
- Two of the six outlets include extra spacing for clearance of most plug in transformers (see photo above).
- Panel dimensions are 1.75" high (1U) and 19" rack width.
- Units are cURus recognized to Standard UL1363 & CSA C22.2 No. 21-95



Rack Mount Outlet Strips


Part No.	Maximum Current	Rear Outlets	Lighted On-Off Switch	On-Off Switch (No Light)	Pilot Light	With Ammeter	Cord Length	Plug Type
1583H6A1BKAM	15 Amps	6	Yes	-	-	Yes	6'	Straight
1583H6B1BKAM	15 Amps	6	Yes	-	-	Yes	15'	Straight
1583T6A1BKAM	15 Amps	6	-	-	Yes	Yes	6'	Straight
1583T6B1BKAM	15 Amps	6	-	-	Yes	Yes	15'	Straight
1589H6C1BKRRAM	20 Amps	6	-	Yes	-	Yes	6'	Twist-Lock
1589H6F1BKRRAM	20 Amps	6	-	Yes	-	Yes	6'	Straight
1589T6C1BKRRAM	20 Amps	6	-	-	Yes	Yes	6'	Twist-Lock
1589T6F1BKRRAM	20 Amps	6	-	-	Yes	Yes	6'	Straight

15 Amp - Vertical Rack Mount Strips

1585, 1586, 1587 & 1588 "H" Series

Key Features

- 1 5/8" x 1 3/8" aluminum profiles with hardware included for mounting to rack cabinet Amhal Struts or open relay racks.
- Most are natural aluminum finish - some models (as noted in tables below) are available in black powder paint finish.
- Receptacles are 1" square and are equally spaced over the length of the power strip (see tables below for spacing)
- With lighted on/off switch (or pilot light - see tables below) and 15 Amp. circuit breaker.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug types available are NEMA 5-15P straight blade or NEMA L5-15P twist-lock (see table below).
- For additional hardware kit, order part number 1585CLIP.
- These strips are also handy for work benches.
- Rated 15 amps, 120 volt.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL listed, Standard UL1363
- Outlet strips can NOT be used between the front & rear panel rails of rack cabinets as they (and the equipment plugs) will interfere with mounted equipment and mounted accessories.
- To properly use on rack cabinets, allow sufficient depth BEHIND the rear panel rails for vertically mounting to the amhul struts.
- Surge Protected models also available - please see the 1585, 1586, 1587 & 1588 "S" models on **page 28**

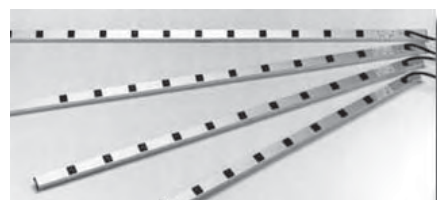

Rack Mount Outlet Strips

With On/Off Switch

Part No.	Outlets	Center to Center	Cord Length	Color	Plug Type	Strip Length
15851H6A1	6	1.63"	6'	Natural	Straight	18"
15851H6B1	6	1.63"	15'	Natural	Straight	18"
15851H6C1	6	1.63"	6'	Natural	Twist-Lock	18"
15851H6D1	6	1.63"	15'	Natural	Twist-Lock	18"
15852H6A1	6	1.75"	6'	Natural	Straight	24"
15852H6B1	6	1.75"	15'	Natural	Straight	24"
15852H6C1	6	1.75"	6'	Natural	Twist-Lock	24"
15852H6D1	6	1.75"	15'	Natural	Twist-Lock	24"
15852H8A1	8	1.75"	6'	Natural	Straight	24"
15852H8B1	8	1.75"	15'	Natural	Straight	24"
15852H8C1	8	1.75"	6'	Natural	Twist-Lock	24"
15852H8D1	8	1.75"	15'	Natural	Twist-Lock	24"
15853H6A1	6	5.00"	6'	Natural	Straight	36"
15853H6B1	6	5.00"	15'	Natural	Straight	36"
15853H6C1	6	5.00"	6'	Natural	Twist-Lock	36"
15853H6D1	6	5.00"	15'	Natural	Twist-Lock	36"
15854H7A1	7	5.00"	6'	Natural	Straight	42"
15854H7B1	7	5.00"	15'	Natural	Straight	42"
15854H7C1	7	5.00"	6'	Natural	Twist-Lock	42"
15854H7D1	7	5.00"	15'	Natural	Twist-Lock	42"
1585H8A1	8	5.00"	6'	Natural	Straight	48"
1585H8A1BK	8	5.00"	6'	Black	Straight	48"
1585H8B1	8	5.00"	15'	Natural	Straight	48"
1585H8B1BK	8	5.00"	15'	Black	Straight	48"
1585H8C1	8	5.00"	6'	Natural	Twist-Lock	48"
1585H8D1	8	5.00"	15'	Natural	Twist-Lock	48"
1585H10A1	10	3.50"	6'	Natural	Straight	48"
1585H10B1	10	3.50"	15'	Natural	Straight	48"
1585H10C1	10	3.50"	6'	Natural	Twist-Lock	48"
1585H10D1	10	3.50"	15'	Natural	Twist-Lock	48"
1585H11A1	11	3.50"	6'	Natural	Straight	48"
1585H11B1	11	3.50"	15'	Natural	Straight	48"
1585H11C1	11	3.50"	6'	Natural	Twist-Lock	48"
1585H11D1	11	3.50"	15'	Natural	Twist-Lock	48"
1585H15A1	15	2.50"	6'	Natural	Straight	48"
1585H15B1	15	2.50"	15'	Natural	Straight	48"
1585H15C1	15	2.50"	6'	Natural	Twist-Lock	48"
1585H15D1	15	2.50"	15'	Natural	Twist-Lock	48"
1585H16A1	16	2.25"	6'	Natural	Straight	48"
1585H16B1	16	2.25"	15'	Natural	Straight	48"

Part No.	Outlets	Center to Center	Cord Length	Color	Plug Type	Strip Length
1585H16C1	16	2.25"	6'	Natural	Twist-Lock	48"
1585H16D1	16	2.25"	15'	Natural	Twist-Lock	48"
1586H10A1	10	5.00"	6'	Natural	Straight	60"
1586H10B1	10	5.00"	15'	Natural	Straight	60"
1586H10C1	10	5.00"	6'	Natural	Twist-Lock	60"
1586H10D1	10	5.00"	15'	Natural	Twist-Lock	60"
1586H12A1	12	4.75"	6'	Natural	Straight	60"
1586H12A1BK	12	4.75"	6'	Black	Straight	60"
1586H12B1	12	4.75"	15'	Natural	Straight	60"
1586H12B1BK	12	4.75"	15'	Black	Straight	60"
1586H12C1	12	4.75"	6'	Natural	Twist-Lock	60"
1586H12D1	12	4.75"	15'	Natural	Twist-Lock	60"
1587H10A1	10	5.00"	6'	Natural	Straight	70"
1587H10A1BK	10	5.00"	6'	Black	Straight	70"
1587H10B1	10	5.00"	15'	Natural	Straight	70"
1587H10B1BK	10	5.00"	15'	Black	Straight	70"
1587H10C1	10	5.00"	6'	Natural	Twist-Lock	70"
1587H10D1	10	5.00"	15'	Natural	Twist-Lock	70"
1587H11A1	11	5.00"	6'	Natural	Straight	70"
1587H11B1	11	5.00"	15'	Natural	Straight	70"
1587H11C1	11	5.00"	6'	Natural	Twist-Lock	70"
1587H11D1	11	5.00"	15'	Natural	Twist-Lock	70"
1587H12A1	12	5.00"	6'	Natural	Straight	70"
1587H12B1	12	5.00"	15'	Natural	Straight	70"
1587H12C1	12	5.00"	6'	Natural	Twist-Lock	70"
1587H12D1	12	5.00"	15'	Natural	Twist-Lock	70"
1587H19A1	19	3.00"	6'	Natural	Straight	70"
1587H19B1	19	3.00"	15'	Natural	Straight	70"
1587H19C1	19	3.00"	6'	Natural	Twist-Lock	70"
1587H19D1	19	3.00"	15'	Natural	Twist-Lock	70"
1587H24A1	24	2.50"	6'	Natural	Straight	70"
1587H24B1	24	2.50"	15'	Natural	Straight	70"
1587H24C1	24	2.50"	6'	Natural	Twist-Lock	70"
1587H24D1	24	2.50"	15'	Natural	Twist-Lock	70"
1588H12A1	12	5.00"	6'	Natural	Straight	77"
1588H12A1BK	12	5.00"	6'	Black	Straight	77"
1588H12B1	12	5.00"	15'	Natural	Straight	77"
1588H12B1BK	12	5.00"	15'	Black	Straight	77"
1588H12C1	12	5.00"	6'	Natural	Twist-Lock	77"
1588H12D1	12	5.00"	15'	Natural	Twist-Lock	77"

Also Available (by special order) - change to 90 degree receptacles on any models shown above.

15 Amp - Vertical Rack Mount Strips

1585, 1586, 1587 & 1588 "T" Series

With Pilot Light (No Switch)


Part No.	Outlets	Center to Center	Cord Length	Color	Plug Type	Strip Length
15851T6A1	6	1.63"	6'	Natural	Straight	18"
15851T6B1	6	1.63"	15'	Natural	Straight	18"
15851T6C1	6	1.63"	6'	Natural	Twist-Lock	18"
15851T6D1	6	1.63"	15'	Natural	Twist-Lock	18"
15852T6A1	6	1.75"	6'	Natural	Straight	24"
15852T6B1	6	1.75"	15'	Natural	Straight	24"
15852T6C1	6	1.75"	6'	Natural	Twist-Lock	24"
15852T6D1	6	1.75"	15'	Natural	Twist-Lock	24"
15852T8A1	8	1.75"	6'	Natural	Straight	24"
15852T8B1	8	1.75"	15'	Natural	Straight	24"
15852T8C1	8	1.75"	6'	Natural	Twist-Lock	24"
15852T8D1	8	1.75"	15'	Natural	Twist-Lock	24"
15853T6A1	6	5.00"	6'	Natural	Straight	36"
15853T6B1	6	5.00"	15'	Natural	Straight	36"
15853T6C1	6	5.00"	6'	Natural	Twist-Lock	36"
15853T6D1	6	5.00"	15'	Natural	Twist-Lock	36"
15854T7A1	7	5.00"	6'	Natural	Straight	42"
15854T7B1	7	5.00"	15'	Natural	Straight	42"
15854T7C1	7	5.00"	6'	Natural	Twist-Lock	42"
15854T7D1	7	5.00"	15'	Natural	Twist-Lock	42"
1585T8A1	8	5.00"	6'	Natural	Straight	48"
1585T8A1BK	8	5.00"	6'	Black	Straight	48"
1585T8B1	8	5.00"	15'	Natural	Straight	48"
1585T8B1BK	8	5.00"	15'	Black	Straight	48"
1585T8C1	8	5.00"	6'	Natural	Twist-Lock	48"
1585T8D1	8	5.00"	15'	Natural	Twist-Lock	48"
1585T10A1	10	3.50"	6'	Natural	Straight	48"
1585T10B1	10	3.50"	15'	Natural	Straight	48"
1585T10C1	10	3.50"	6'	Natural	Twist-Lock	48"
1585T10D1	10	3.50"	15'	Natural	Twist-Lock	48"
1585T11A1	11	3.50"	6'	Natural	Straight	48"
1585T11B1	11	3.50"	15'	Natural	Straight	48"
1585T11C1	11	3.50"	6'	Natural	Twist-Lock	48"
1585T11D1	11	3.50"	15'	Natural	Twist-Lock	48"
1585T15A1	15	2.50"	6'	Natural	Straight	48"
1585T15B1	15	2.50"	15'	Natural	Straight	48"
1585T15C1	15	2.50"	6'	Natural	Twist-Lock	48"
1585T15D1	15	2.50"	15'	Natural	Twist-Lock	48"
1585T16A1	16	2.25"	6'	Natural	Straight	48"
1585T16B1	16	2.25"	15'	Natural	Straight	48"

Part No.	Outlets	Center to Center	Cord Length	Color	Plug Type	Strip Length
1585T16C1	16	2.25"	6'	Natural	Twist-Lock	48"
1585T16D1	16	2.25"	15'	Natural	Twist-Lock	48"
1586T10A1	10	5.00"	6'	Natural	Straight	60"
1586T10B1	10	5.00"	15'	Natural	Straight	60"
1586T10C1	10	5.00"	6'	Natural	Twist-Lock	60"
1586T10D1	10	5.00"	15'	Natural	Twist-Lock	60"
1586T12A1	12	4.75"	6'	Natural	Straight	60"
1586T12A1BK	12	4.75"	6'	Black	Straight	60"
1586T12B1	12	4.75"	15'	Natural	Straight	60"
1586T12B1BK	12	4.75"	15'	Black	Straight	60"
1586T12C1	12	4.75"	6'	Natural	Twist-Lock	60"
1586T12D1	12	4.75"	15'	Natural	Twist-Lock	60"
1587T10A1	10	5.00"	6'	Natural	Straight	70"
1587T10A1BK	10	5.00"	6'	Black	Straight	70"
1587T10B1	10	5.00"	15'	Natural	Straight	70"
1587T10B1BK	10	5.00"	15'	Black	Straight	70"
1587T10C1	10	5.00"	6'	Natural	Twist-Lock	70"
1587T10D1	10	5.00"	15'	Natural	Twist-Lock	70"
1587T11A1	11	5.00"	6'	Natural	Straight	70"
1587T11B1	11	5.00"	15'	Natural	Straight	70"
1587T11C1	11	5.00"	6'	Natural	Twist-Lock	70"
1587T11D1	11	5.00"	15'	Natural	Twist-Lock	70"
1587T12A1	12	5.00"	6'	Natural	Straight	70"
1587T12B1	12	5.00"	15'	Natural	Straight	70"
1587T12C1	12	5.00"	6'	Natural	Twist-Lock	70"
1587T12D1	12	5.00"	15'	Natural	Twist-Lock	70"
1587T19A1	19	3.00"	6'	Natural	Straight	70"
1587T19B1	19	3.00"	15'	Natural	Straight	70"
1587T19C1	19	3.00"	6'	Natural	Twist-Lock	70"
1587T19D1	19	3.00"	15'	Natural	Twist-Lock	70"
1587T24A1	24	2.50"	6'	Natural	Straight	70"
1587T24B1	24	2.50"	15'	Natural	Straight	70"
1587T24C1	24	2.50"	6'	Natural	Twist-Lock	70"
1587T24D1	24	2.50"	15'	Natural	Twist-Lock	70"
1588T12A1	12	5.00"	6'	Natural	Straight	77"
1588T12A1BK	12	5.00"	6'	Black	Straight	77"
1588T12B1	12	5.00"	15'	Natural	Straight	77"
1588T12B1BK	12	5.00"	15'	Black	Straight	77"
1588T12C1	12	5.00"	6'	Natural	Twist-Lock	77"
1588T12D1	12	5.00"	15'	Natural	Twist-Lock	77"

Rack Mount Outlet Strips

Also Available (by special order) - change to 90 degree receptacles on any models shown above.

Color Options

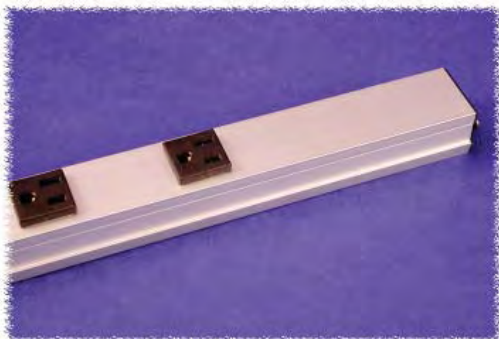

Natural Aluminum Finish




Black Powder Paint Finish

20 Amp - Vertical Rack Mount Strips

1589 Series

Key Features

- 1 5/8" x 1 3/8" aluminum profiles with hardware included for mounting to rack Amhal Struts or open relay racks.
- Receptacles are 1" square and are equally spaced over the length of the power strip (see tables below for spacing).
- With on/off switch (or pilot light - see tables below) 20 Amp receptacles and 20 Amp. circuit breaker.
- Heavy 12 gauge wire cord - 12/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Heavy-duty black receptacles rated for 20A, 125VAC service (NEMA 5-20R, Single T-Slot).
- Plug types available are NEMA 5-20P straight blade or NEMA L5-20P twist-lock
- For additional hardware kit, order part number 1585CLIP.
- These strips are also handy for work benches.
- Rated 20 amps, 120 volt.
- CSA certified, Standards C22.2 (No. 21-95 and No. 42-99)
- UL listed, Standard UL1363
- NOTE #1: Outlet strips can NOT be used between the front & rear panel rails of rack cabinets as they (and the equipment plugs) will interfere with mounted equipment and mounted accessories.
- NOTE #2: To properly use on rack cabinets, allow sufficient depth BEHIND the rear panel rails for vertically mounting to the amhal struts.

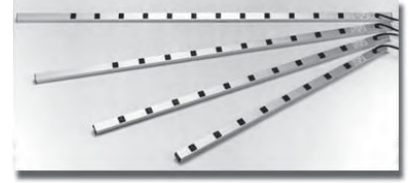

Rack Mount Outlet Strips

With Pilot Light (No Switch)

Part No.	Outlets	Center to Center	On/Off Switch	Cord Length	Plug Type	Strip Length
1589T18C1	6	1.63"	No	6'	Twist-Lock	18"
1589T18D1	6	1.63"	No	15'	Twist-Lock	18"
1589T18F1	6	1.63"	No	6'	Straight	18"
1589T18G1	6	1.63"	No	15'	Straight	18"
1589T24C1	8	1.75"	No	6'	Twist-Lock	24"
1589T24D1	8	1.75"	No	15'	Twist-Lock	24"
1589T24F1	8	1.75"	No	6'	Straight	24"
1589T24G1	8	1.75"	No	15'	Straight	24"
1589T36C1	6	5.00"	No	6'	Twist-Lock	36"
1589T36D1	6	5.00"	No	15'	Twist-Lock	36"
1589T36F1	6	5.00"	No	6'	Straight	36"
1589T36G1	6	5.00"	No	15'	Straight	36"
1589T42C1	7	5.00"	No	6'	Twist-Lock	42"
1589T42D1	7	5.00"	No	15'	Twist-Lock	42"
1589T42F1	7	5.00"	No	6'	Straight	42"
1589T42G1	7	5.00"	No	15'	Straight	42"
1589T48C1	8	5.00"	No	6'	Twist-Lock	48"
1589T48D1	8	5.00"	No	15'	Twist-Lock	48"
1589T48F1	8	5.00"	No	6'	Straight	48"
1589T48G1	8	5.00"	No	15'	Straight	48"
1589T48C116	16	2.25"	No	6'	Twist-Lock	48"
1589T48D116	16	2.25"	No	15'	Twist-Lock	48"
1589T48F116	16	2.25"	No	6'	Straight	48"
1589T48G116	16	2.25"	No	15'	Straight	48"
1589T60C1	10	5.00"	No	6'	Twist-Lock	60"
1589T60D1	10	5.00"	No	15'	Twist-Lock	60"
1589T60F1	10	5.00"	No	6'	Straight	60"
1589T60G1	10	5.00"	No	15'	Straight	60"
1589T70C1	10	5.00"	No	6'	Twist-Lock	70"
1589T70D1	10	5.00"	No	15'	Twist-Lock	70"
1589T70F1	10	5.00"	No	6'	Straight	70"
1589T70G1	10	5.00"	No	15'	Straight	70"
1589T70C124	24	2.50"	No	6'	Twist-Lock	70"
1589T70D124	24	2.50"	No	15'	Twist-Lock	70"
1589T70F124	24	2.50"	No	6'	Straight	70"
1589T70G124	24	2.50"	No	15'	Straight	70"
1589T77C1	12	5.00"	No	6'	Twist-Lock	77"
1589T77D1	12	5.00"	No	15'	Twist-Lock	77"
1589T77F1	12	5.00"	No	6'	Straight	77"
1589T77G1	12	5.00"	No	15'	Straight	77"

With On/Off Switch

Part No.	Outlets	Center to Center	On/Off Switch	Cord Length	Plug Type	Strip Length
1589H18C1	6	1.63"	Yes	6'	Twist-Lock	18"
1589H18D1	6	1.63"	Yes	15'	Twist-Lock	18"
1589H18F1	6	1.63"	Yes	6'	Straight	18"
1589H18G1	6	1.63"	Yes	15'	Straight	18"
1589H24C1	8	1.75"	Yes	6'	Twist-Lock	24"
1589H24D1	8	1.75"	Yes	15'	Twist-Lock	24"
1589H24F1	8	1.75"	Yes	6'	Straight	24"
1589H24G1	8	1.75"	Yes	15'	Straight	24"
1589H36C1	6	5.00"	Yes	6'	Twist-Lock	36"
1589H36D1	6	5.00"	Yes	15'	Twist-Lock	36"
1589H36F1	6	5.00"	Yes	6'	Straight	36"
1589H36G1	6	5.00"	Yes	15'	Straight	36"
1589H42C1	7	5.00"	Yes	6'	Twist-Lock	42"
1589H42D1	7	5.00"	Yes	15'	Twist-Lock	42"
1589H42F1	7	5.00"	Yes	6'	Straight	42"
1589H42G1	7	5.00"	Yes	15'	Straight	42"
1589H48C1	8	5.00"	Yes	6'	Twist-Lock	48"
1589H48D1	8	5.00"	Yes	15'	Twist-Lock	48"
1589H48F1	8	5.00"	Yes	6'	Straight	48"
1589H48G1	8	5.00"	Yes	15'	Straight	48"
1589H48C116	16	2.25"	Yes	6'	Twist-Lock	48"
1589H48D116	16	2.25"	Yes	15'	Twist-Lock	48"
1589H48F116	16	2.25"	Yes	6'	Straight	48"
1589H48G116	16	2.25"	Yes	15'	Straight	48"
1589H60C1	10	5.00"	Yes	6'	Twist-Lock	60"
1589H60D1	10	5.00"	Yes	15'	Twist-Lock	60"
1589H60F1	10	5.00"	Yes	6'	Straight	60"
1589H60G1	10	5.00"	Yes	15'	Straight	60"
1589H70C1	10	5.00"	Yes	6'	Twist-Lock	70"
1589H70D1	10	5.00"	Yes	15'	Twist-Lock	70"
1589H70F1	10	5.00"	Yes	6'	Straight	70"
1589H70G1	10	5.00"	Yes	15'	Straight	70"
1589H70C124	24	2.50"	Yes	6'	Twist-Lock	70"
1589H70D124	24	2.50"	Yes	15'	Twist-Lock	70"
1589H70F124	24	2.50"	Yes	6'	Straight	70"
1589H70G124	24	2.50"	Yes	15'	Straight	70"
1589H77C1	12	5.00"	Yes	6'	Twist-Lock	77"
1589H77D1	12	5.00"	Yes	15'	Twist-Lock	77"
1589H77F1	12	5.00"	Yes	6'	Straight	77"
1589H77G1	12	5.00"	Yes	15'	Straight	77"