

Inclinometers


**Inclinometer
MEMS / capacitive**

IS40, 1-dimensional

Analogue



With the IS40 inclinometer 1-dimensional inclinations in the measuring range 0 - 360° can be measured.
The compact robust construction makes this sensor the ideal device for measuring angles in harsh environments.



Output



High protection level



Shock / vibration resistant



Reverse polarity protection

Innovative

- Rugged construction – high shock resistance
- High resolution and accuracy
- Current or voltage interface
- Adjusting of the measuring range via teach adapter

Compact / Many applications

- Small design – minimal space requirement
- For use in vehicle technology, solar installations, cranes and hoists or in commercial vehicles

**Order code
Inclinometer IS40**

8.IS40 . **14X21**
Type a b c d e

a Measuring direction
1 = 1-dimensional

b Measuring range
4 = 0 ... 360°

c Interface
1 = 4 ... 20 mA
3 = 0.1 ... 4.9 V DC


d Power supply
2 = 10 ... 30 V DC

e Type of connection
1 = M12 connector

Accessories		Order No.
Teach adapter	for inductive encoders, linear position, angle and ultrasonic sensors	05.TX40.1
Connection technology		
Connector, self-assembly (straight)	M12 female connector with coupling	8.0000.5116.0000
Cordset, pre-assembled	M12 female connector with coupling, 2 m [6.56'] PVC cable	05.00.6081.2211.002M

Further accessories can be found in the accessories section or in the accessories area of our website.
Additional connectors can be found in the connection technology section or in the connection technology area of our website.

Direction of inclination

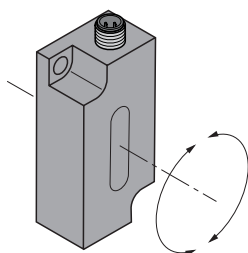

Adjusting the measuring range via 05.TX40.1 teach adapter

- Setting the angular range in CW direction:
 - Move sensor to start position
 - Press and hold Teach-Gnd until the output is set to < 4 mA / 0.1 V (approx. 1 s)
 - Move sensor to end position
 - Press and hold Teach-GND until the output is set to 20 mA / 4.9 V (approx. 3 s)
- Resetting the angular range:
 - Press and hold Teach-Gnd until the output is set to 12 mA (approx. 6 s)
 - The angular range is reset to 360°



Inclinometers

Inclinometer MEMS / capacitive	IS40, 1-dimensional	Analogue
---	----------------------------	-----------------


Technical data

Mechanical characteristics	
Connection	M12 connector
Weight	50 g [1.76 oz]
Protection acc. to EN 60529	IP68 / IP69K
Working temperature range	-30°C ... +70°C [-22°F ... +158°F]
Material	plastic PBT-GF20-V0
Shock resistance	30 g, 11 ms
Vibration resistance	55 Hz, 1 mm [0.04]
Dimensions	60 x 30 x 20 mm [2.36 x 1.18 x 0.79"]


Interface characteristics	
Voltage output	0.1 ... 4.9 V DC short-circuit protected to +V
Load resistance voltage output	≥ 40 kΩ
Output impedance voltage output	99 ... 105 Ω
Current output	4 ... 20 mA
Load resistance current output	≤ 200 Ω

Electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption	50 ... 105 mA (depending on voltage)
Reverse polarity protection (+V)	yes
Measuring axes	1
Measuring range	0 ... 360°
Resolution	≤ 0.14°
Repeat accuracy	≤ 0.2% of measuring range ≤ 0.1% after a warm-up period of 30 min
Temperature drift	0.03°/K
Reaction time	0.1 s – Time that the output signal requires to reach 90% full scale
CE compliant acc. to	EN 61362-2-3 EMC requirements for transducers

Connections

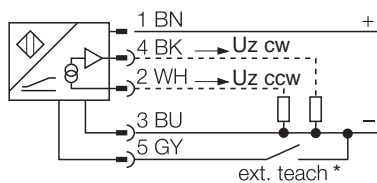

Terminal assignment



*) Teach adapter, accessory (Order No. 05.TX40.1)

Dimensions

Dimensions in mm [inch]

