

Managed switches

- 8 Ports Available
- Configuration Port
- IP 67 Protection
- 4-pin Ethernet Connectors



SE-44M-E924

Electrical

- Power Consumption: 4 W
- Operating Voltage: 10-30 VDC

Mechanical


- Operating Temperature: -30 to +80 °C (-22 to +176 °F)
- Protection: NEMA 1,3,4,6,13 and IEC IP 67

Material

- Housing: Nylon 6 (other materials available on request)
- Connectors: Nickel-plated Brass (other materials available on request)

Diagnostics (Physical)

- LEDs to indicate status of Ethernet communication

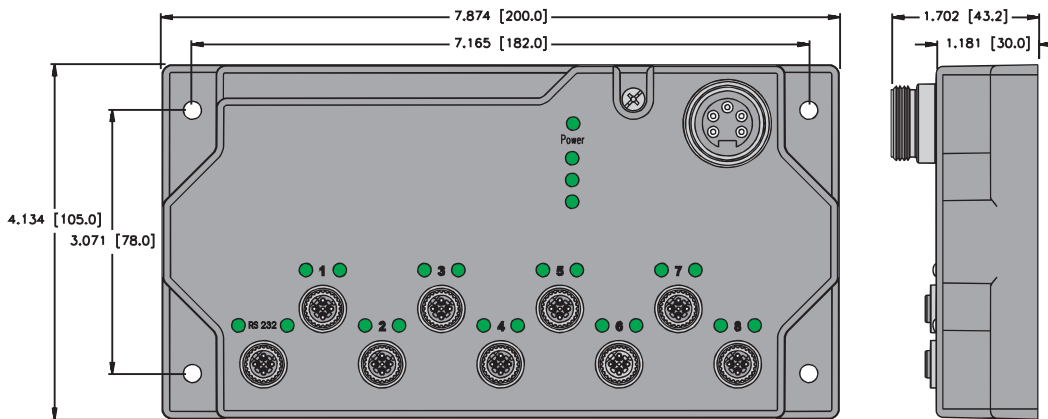


Inputs

Part Number	Ports*	Ethernet Pinout	Power Pinout	Dimensions
SE-44M-E924	8	4E	5M-2	A


* Note: 8 Ethernet ports plus one RS232 configuration port

Port/Power Connectors



**4-pin eurofast®
Female**


- 1 = WH/OG (TX+)
- 2 = WH/GN (RX+)
- 3 = OG (TX-)
- 4 = GN (RX-)



5-pin minifast® Power

- 1 = Gnd
- 2 = Gnd
- 3 = Ok
- 4 = V₁+
- 5 = V₂+

Configuration Port 232



Mating cordset:

RK 4.4T-* -RS 4.4T