

3 and 4-Pin minifast® Field Wireable Connectors

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection







Drawing Number	Part Number	Cable	Application	Pinout
<p>B 41 .. $\phi 1.065 [27.0]$ $3.346 [85.0] \text{ APPROX}$ $7/8-16UN$</p>	B 4131-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	B 4131-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	B 4141-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	B 4141-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	

5 and 12-Pin *minifast*® Field Wireable Connectors

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Field Wireables

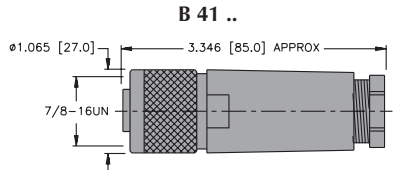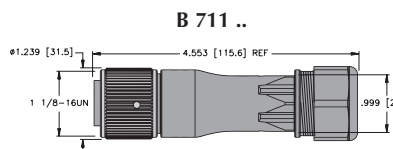Drawing Number	Part Number	Cable	Application	Pinout
 <p>B 41 ..</p>	B 4151-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
	B 4151-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
	B 4151-0/16	Glass filled nylon PG 16 cable gland, accepts 12-14 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
 <p>B 711 ..</p>	B 71121-0/21	Glass filled nylon accepts 18 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 600 V, 9 A	<i>Mates with all 12-pin cordsets and receptacles</i>	

3, 4 and 5-Pin minifast® Field Wireable Connectors

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection






Drawing Number	Part Number	Cable	Application	Pinout
<p>B 42 ..</p>	B 4231-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	B 4241-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	B 4251-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	

3 and 4-Pin *minifast*® Field Wireable Connectors

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Drawing Number	Part Number	Cable	Application	Pinout
 <p>BS 41 ..</p> <p>Ø1.065 [27.0]</p> <p>3.465 [88.0] APPROX</p> <p>7/8-16UN</p>	BS 4131-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85° C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	BS 4131-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85° C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	BS 4141-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85° C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	BS 4141-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85° C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	

5 and 12-Pin *minifast*® Field Wireable Connectors

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection






Drawing Number	Part Number	Cable	Application	Pinout
<p>BS 41 ..</p>	BS 4151-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
	BS 4151-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
	BS 4151-0/16	Glass filled nylon PG 16 cable gland, accepts 12-14 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	
<p>BS 711 ..</p>	BS 71121-0/21	Glass filled nylon accepts 18 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 600 V, 9 A	<i>Mates with all 12-pin cordsets and receptacles</i>	

3, 4 and 5-Pin *minifast*® Field Wireable Connectors

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Drawing Number	Part Number	Cable	Application	Pinout
 <p>BS 42 ..</p>	BS 4231-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	BS 4241-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	BS 4251-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	