

### 3 and 4-Wire *pentafast*® Receptacles

- Female Receptacle
- NEMA 1, 3, 4, 6P and IEC IP 67
- 125 V, 1 A






Housing Style	Part Number	Lead Specs.	Application	Pinout
	VFK 3-*	3x26 AWG 80° C	Mates with 3-pin cordsets	<ol style="list-style-type: none"> <li>1. BN</li> <li>2. N/C</li> <li>3. BU</li> <li>4. BK</li> </ol>
	VFK 4-*	4x26 AWG 80° C	Mates with 4-pin cordsets	<ol style="list-style-type: none"> <li>1. BN</li> <li>2. WH</li> <li>3. BU</li> <li>4. BK</li> </ol>

\* Length in meters. Standard lead lengths are 2, 3, 4 and 6 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass.

### 3 and 4-Wire *pentafast*® Receptacles

- Male Receptacle
- NEMA 1, 3, 4, 6P and IEC IP 67
- 125 V, 1 A

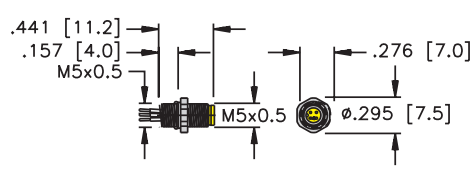

Housing Style	Part Number	Lead Specs.	Application	Pinout
	VFS 3-*	3x26 AWG 80° C	Mates with 3-pin cordsets	1. BN 2. N/C 3. BU 4. BK 
	VFS 4-*	4x26 AWG 80° C	Mates with 4-pin cordsets	1. BN 2. WH 3. BU 4. BK 

\* Length in meters. Standard lead lengths are 2, 3, 4 and 6 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass.