
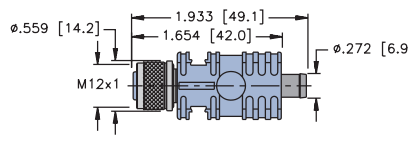


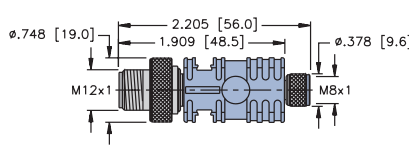



picofast® to eurofast® Adapters







- Enables *picofast* and *eurofast* Connectors to be Interchanged
- *eurofast* Connection has Anti-vibration Coupling Nut



Drawing	Part Number	Specifications	Application	Pinout
	FKMR 4-ESM 3S	PUR body 60 VAC/ 75 VDC 4 A 80°C	Female eurofast, male snap-lock picofast connector, 3-pin	
	FKMR 4.4-ESM 4S	PUR body 30 VAC/ 36 VDC 4 A 80°C	Female eurofast, male snap-lock picofast connector, 4-pin	
	FSMR 4-SKM 3	PUR body 60 VAC/ 75 VDC 4 A 80°C	Male eurofast, female threaded picofast connector, 3-pin	
	FSMR 4.4-SKM 4	PUR body 30 VAC/ 36 VDC 4 A 80°C	Male eurofast, female threaded picofast connector, 4-pin	

Add "/S857" to the end of part description to specify mounting hole.

Pinouts

Female			Male		
					
3-Pin picofast	4-Pin picofast	4-Pin eurofast	3-Pin picofast	4-Pin picofast	4-Pin eurofast