

2 - 4 Wire 1 3/8" powerfast® Receptacles

- Male Receptacles
- IEC IP 67







Housing Style	Part Number	Lead Specs.	Application	Pinout	
<p>GSF ..</p>	GSF 24-0.3M/14.5/NPT	2x14 AWG 90°C 600 V, 18 A	<i>Mates with 2-pin cordsets</i>	1. BK 2. WH 	
	GSF 22-0.3M/14.5/NPT	2x12 AWG 90°C 600 V, 25 A			
	GSF 20-0.3M/14.5/NPT	2x10 AWG 90°C 600 V, 30 A			
	GSF 34-0.3M/14.5/NPT	GSF 32-0.3M/14.5/NPT	3x14 AWG 90°C 600 V, 18 A	<i>Mates with 3-pin cordsets</i>	1. BK 2. WH 3. GN
	GSF 30-0.3M/14.5/NPT	3x12 AWG 90°C 600 V, 25 A			
	GSF 30-0.3M/14.5/NPT	3x10 AWG 90°C 600 V, 30 A			
	GSF 44-0.3M/14.5/NPT	GSF 42-0.3M/14.5/NPT	4x14 AWG 90°C 600 V, 15 A	<i>Mates with 4-pin cordsets</i>	1. BK 2. GN 3. RD 4. WH
	GSF 40-0.3M/14.5/NPT	4x12 AWG 90°C 600 V, 20 A			
	GSF 40-0.3M/14.5/NPT	4x10 AWG 90°C 600 V, 25 A			

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths. Standard housing and coupling nut material is anodized aluminum.

2 - 4 Wire 1 3/8" powerfast® Receptacles

- Female Receptacles
- IEC IP 67

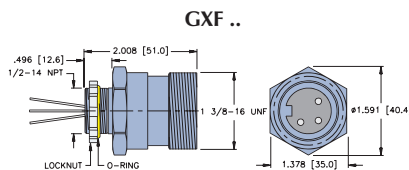

Housing Style	Part Number	Lead Specs.	Application	Pinout	
 <p>GXF ..</p>	GXF 24-0.3M/14.5/NPT	2x14 AWG 90°C 600 V, 18 A	<i>Mates with 2-pin cordsets</i>	<ol style="list-style-type: none"> 1. BK 2. WH 	
	GXF 22-0.3M/14.5/NPT	2x12 AWG 90°C 600 V, 25 A			
	GXF 20-0.3M/14.5/NPT	2x10 AWG 90°C 600 V, 30 A			
	GXF 34-0.3M/14.5/NPT	GXF 32-0.3M/14.5/NPT	3x14 AWG 90°C 600 V, 18 A	<i>Mates with 3-pin cordsets</i>	<ol style="list-style-type: none"> 1. BK 2. WH 3. GN 
	GXF 30-0.3M/14.5/NPT	3x12 AWG 90°C 600 V, 25 A			
	GXF 44-0.3M/14.5/NPT	GXF 42-0.3M/14.5/NPT	4x14 AWG 90°C 600 V, 15 A	<i>Mates with 4-pin cordsets</i>	<ol style="list-style-type: none"> 1. BK 2. GN 3. RD 4. WH 
	GXF 40-0.3M/14.5/NPT	4x12 AWG 90°C 600 V, 20 A			
		GXF 40-0.3M/14.5/NPT	4x10 AWG 90°C 600 V, 25 A		

Cordsets

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths. Standard housing and coupling nut material is anodized aluminum.

6 - 9 Wire M23 powerfast® Receptacles, M23 Threads

- Male Receptacles
- IEC IP 67



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CSF 94-9-*	3x14, 6x18 AWG 105°C 150 V, 8 A (1-3, 5, 7, 9), 20 A (4, 6, 8)	9-pin DC Application	1. RD 2. WH 3. WH/BK 4. BU 5. OG 6. BK 7. GN/BK 8. GN 9. RD/BK
	CSF 64-6-*	6x14 AWG 105°C 300 V, 20 A	6-pin DC Application	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	CSF 74-7-*	Nickel Plated Brass 7x14 AWG 105°C 300 V, 20 A	7-pin DC Application	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.
Standard housing material is nickel plated brass.
To specify PVC jacketed cable, add "/S717" to the end of the part number.

6 - 9 Wire M23 powerfast® Receptacles, M23 Threads

- Female Connectors
- IEC IP 67



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CKF 94-9-*	3x14, 6x18 AWG 105°C 150 V, 8 A	9-pin DC Application	1. RD 2. WH 3. WH/BK 4. BU 5. OG 6. BK 7. GN/BK 8. GN 9. RD/BK
	CKF 64-6-*	6x14 AWG 105°C 300 V, 20 A	6-pin DC Application	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	CKF 74-7-*	7x14 AWG 105°C 300 V, 20 A	7-pin DC Application	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN

Cordsets

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.
 Standard housing material is nickel plated brass.
 To specify PVC jacketed cable, add "/S717" to the end of the part number.

6 and 8-Wire M23 powerfast® Receptacles, Assembled 3-Key

- Female and Male Receptacles
- IEC IP 67



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CKF 62-6-*	6X12 AWG 105°C 600 V, 24A	High Current, 3-Key	1. BK 2. RD 3. BU 4. OG 5. YE 6. BN
	CKF 82-8-*	4X12, 4X18 AWG 105°C 600 V, 24A (1-4), 300 V, 8A (A-D)		1. BU 2. GN 3. WH 4. BK A. OG B. RD C. WH/BK D. RD/BK
	CSF 62-6-*	6X12 AWG 105°C 600 V, 24A		1. BK 2. RD 3. BU 4. OG 5. YE 6. BN
	CSF 82-8-*	4X12, 4X18 AWG 105°C 600 V, 24A (1-4), 300 V, 8A (A-D)		1. BU 2. GN 3. WH 4. BK A. OG B. RD C. WH/BK D. RD/BK

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.
Standard housing material is nickel plated brass.

4-Wire M40 powerfast® Receptacles

- Female & Male Receptacles
- 600 V, 55 A
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Features	Pinout
<p>HKF ..</p>	HKF 4800-*M	Nickel Plated Brass Housing 4x8 AWG 125°C	<i>Demanding Power</i>	
<p>HSF ..</p>	HSF 4800-*M	Nickel Plated Brass Housing 4x8 AWG 125°C		

* Length in meters.

Standard housing material is nickel plated brass "HK(S)F.."; "HK(S)FV.." indicates 316 stainless steel.