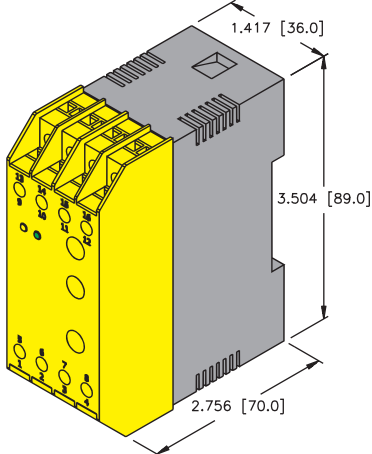
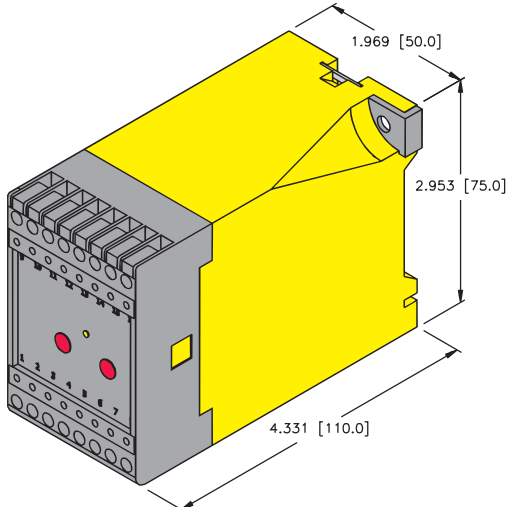


Housing Style	Part Number	ID Number	Features	Output
<p><b>Level Control Monitor 24 VDC, Dip-Switch Programmable</b></p> 	MK 91-12-R/024VDC	M7545077	Dual Level Controller, Adjustable Time Delay	(2) SPDT Relays/Parallel
	MK 91-12-R/115VAC	M7545072		
	MK 91-12-R/230VAC	M7545070		
<p><b>Level Control Monitor, Potentiometer/Jumper Programmable</b></p> 	MS91-12-R	M5220110	Dual Level Controller, Adjustable Time Delay	(2) SPDT Relays/Parallel

Additional specifications on page D51-D52.

**Material**

Housing	PC/ABS
---------	--------

Voltage	Switching Current	Switch Point	Current Consumption	Hysteresis	Power LED	Output LED	Wiring Diagram #	Wiring Diagrams
20-28 VDC	3 A at 250 VUC	0.2-100 kΩ	≤1.5 W	Approx. 10%	GN	YE	1	<p><b>Diagram 1</b></p>
98-126 VAC	3 A at 250 VUC	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	1	<p><b>Diagram 2</b></p>
184-264 VAC	3 A at 250 VUC	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	1	<p><b>Diagram 2</b></p>
20-250 VUC	4 A at 250 VUC	0.1-100 kΩ	≤3 W	Approx. 10%	GN	YE	2	<p><b>Diagram 2</b></p>