


Diode array

with clip-on foot for TS 32, TS35x7.5 and TS35x15

RSD A


with joint anode or cathode

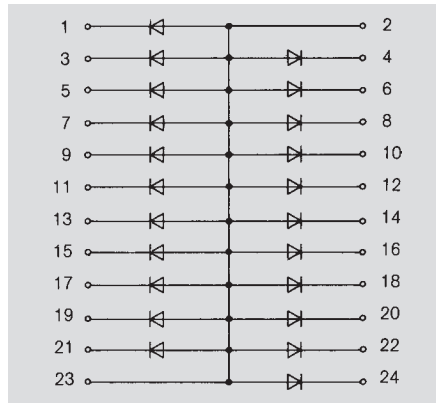

RSD K

RSD

with open diode connections

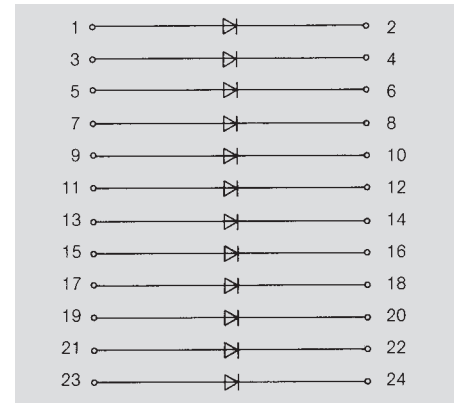

Technical data

Connection data	
Screw connection, solid	0.5...4 mm ²
Screw connection, flexible	0.5...2.5 mm ²
Conductor cross-sectional area	AWG 26...14
Spade connection	0.8 x 2.8 or 0.8 x 6.3 mm
Nominal data	
Operating voltage max.	250 V
Diode reverse voltage	1000 V
Diode current	1 A
Insulation coordination as per EN 50 178	
Overvoltage category	III
Pollution severity	2

Dimensions	RSD A	RSD A	RSD 12	RSD 10	RSD 20	RSD 40
	Base width mm	65	65	65	60	120
Stripping length mm	7	7	7	7	7	7
Remarks						

Order data

	Type	Qty.	Order no.
Screw connection	RSD A	22 diodes 1N4007	1 0180961001
	RSD A-F	22 diodes 1N4007	1 0181160000
Spade connection	RSD K	22 diodes 1N4007	1 0181061001
	RSD K-F	22 diodes 1N4007	1 0181260000
Screw connection	RSD	12 diodes 1N4007	1 0181461001
	RSD-F	12 diodes 1N4007	1 0181360000
	RSD 10	10 diodes 1N4007	1 8022901001
Spade connection	RSD 20	20 diodes 1N4007	1 8022911001
	RSD 40	40 diodes 1N4007	1 8022921001
Mounting rails and end brackets: see chapter F			