

**Neutral conductor disconnect terminals**

In hazardous area applications, the installation instructions and the rated data specifications for accessories given in the technical appendix must be followed.

Width/Length/height with TS35x7.5	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>











**Technical data**


Rated data	
Rated voltage	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Gauge to IEC 60947-1 / UL94 Flammability class	
Approvals	
Clamped conductors (H05V/H07V)	
solid / stranded	mm <sup>2</sup>
flexible / Stranded wire with end ferrules	mm <sup>2</sup>
Twin wire-end ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-
<b>Note</b>	

**Ordering data**

Version	Blue Wemid
<b>Note</b>	


**Accessories**


Pluggable cross-connection	
	2-pole
	3-pole
	4-pole
	10-pole
	20-/24-pole
Mounting plate for 10 x 3 (required every 20 cm)	
	Blue Wemid For a vertical installation position
End bracket	
	Dark beige Wemid
Screwdriver	
	Standard
Busbar 10 x 3 (140 A)	
	OK, Busbar up to OK, TS35 = 25,5 mm
Clamping yoke for power supply to 10 x 3 busbars	
	Rigid / flexible 0,5 - 6 / 4 mm <sup>2</sup> rigid / flexible 6 - 16 mm <sup>2</sup> Flexible 16 - 35 mm <sup>2</sup>

Marking systems	
	(see assortment in catalogue 7) Marking tags
<b>For detailed information on other accessories and applications, refer to the „Accessories“ section</b>	

**PNT 2.5/4**

4 mm<sup>2</sup>

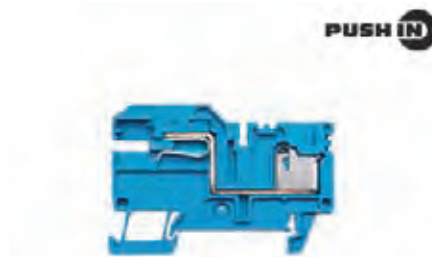

5.1 x 63.5 x 43	
/ 6	
0.08...6	

IEC 60947-7-1			
IEC	UL	CSA	
250			
32			
4			
		4 / 3	
		/ V-0	
<b>Rated connection</b>			
0.5...6			
2.5...4 / 0.5...4			
...1.5			
12 / 3.0 x 0.5 mm			


Type	Qty	Order No.
PNT 2.5/4	50	1896360000


Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
ZQV 2.5/20	24 A	20	1908960000
Width			
PHP PNT 2.5/4	3 mm	20	1896390000
PHP PNT 2.5/4 SO	3 mm	20	1916790000
ZEW 35			
ZEW 35	6 mm	20	9540000000
SD 0.5x3.0x80			
SD 0.5x3.0x80		1	9008320000
SSCH 10X3X1000 CU/SN			
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL			
ZF 4 S BL	22 mm	50	1814660000
ZB 16K BL			
ZB 16K BL	10 mm	50	0502880000
ZB 35/M6X16			
ZB 35/M6X16	14 mm	20	0266500000

<b>Marking systems</b>		
	DEK 5/5 / WS 10/5	

**PNT 6/10**

10 mm<sup>2</sup>

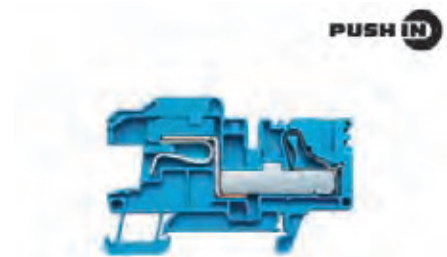

8.1 x 72.5 x 46	
/ 10	
1.5...10	

IEC 60947-7-1			
IEC	UL	CSA	
250			
57			
10	AWG 16...8	AWG 16...8	
		8 / 3	
		/ V-0	
<b>Rated connection</b>			
1.5...10			
1.5...10 / 1.5...10			
14 / 0.6 x 3.5 mm			

Type	Qty	Order No.
PNT 6/10	25	1896370000

Type	current	Qty	Order No.
ZQV 6N/2		60	1906210000
ZQV 6N/3		60	1906220000
ZQV 6N/4		60	1906230000
ZQV 6N/20		20	1906240000
Width			
PHP PNT 6/10	3 mm	10	1896100000
PHP PNT 6/10 SO	3 mm	10	1919710000
ZEW 35			
ZEW 35	6 mm	20	9540000000
SD 0.5x3.0x80			
SD 0.5x3.0x80		1	9008320000
SSCH 10X3X1000 CU/SN			
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL			
ZF 4 S BL	22 mm	50	1814660000
ZB 16K BL			
ZB 16K BL	10 mm	50	0502880000
ZB 35/M6X16			
ZB 35/M6X16	14 mm	20	0266500000

<b>Marking systems</b>		
	WS 10/8	

**Installation terminals**

**Neutral conductor disconnect terminals**

**PNT 16**


**16 mm<sup>2</sup>**



12.1 x 80.5 x 48

**/ 16**

**2.5...16**



In hazardous area applications, the installation instructions and the rated data specifications for accessories given in the technical appendix must be followed.

Width/Length/height with TS35x7.5	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

**Technical data**

<b>Rated data</b>	
Rated voltage	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Gauge to IEC 60947-1 / UL94 Flammability class	
Approvals	

<b>Clamped conductors (H05V/H07V)</b>	
solid / stranded	mm <sup>2</sup>
flexible / Stranded wire with end ferrules	mm <sup>2</sup>
Twin wire-end ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

**Note**


**Ordering data**

<b>Version</b>	Blue Wemid
----------------	------------

**Note**

**Accessories**

<b>Pluggable cross-connection</b>	
	2-pole
	3-pole
	4-pole
	10-pole
	20-/24-pole

<b>Mounting plate for 10 x 3 (required every 20 cm)</b>	Blue Wemid
	For a vertical installation position

<b>End bracket</b>	Dark beige Wemid
--------------------	------------------

<b>Screwdriver</b>	Standard
--------------------	----------

<b>Busbar 10 x 3 (140 A)</b>	OK, Busbar up to OK, TS35 = 25,5 mm
------------------------------	-------------------------------------

<b>Clamping yoke for power supply to 10 x 3 busbars</b>	
	Rigid / flexible 0,5 - 6 / 4 mm <sup>2</sup>
	rigid / flexible 6 - 16 mm <sup>2</sup>
	Flexible 16 - 35 mm <sup>2</sup>

IEC	UL	CSA
400		
76		
16	AWG 12...5	AWG 12...5
	8 / 3	
	/ V-0	

<b>Rated connection</b>
2.5...16
2.5...16 / 2.5...16
14 / 1.0 x 5.5 mm

Type	Qty	Order No.
PNT 16	10	<b>1896350000</b>

Type	Qty	Order No.
<b>Width</b>		
PHP PNT16	3 mm	10 <b>1896380000</b>
PHP PNT16 SO	3 mm	10 <b>1919690000</b>
ZEW 35	6 mm	20 <b>9540000000</b>
SD 1.0x5.5x150		1 <b>9008350000</b>
SSCH 10X3X1000 CU/SN	10 mm	1 <b>0348900000</b>
ZF 4 S BL	22 mm	50 <b>1814660000</b>
ZB 16K BL	10 mm	50 <b>0502880000</b>
ZB 35/M6X16	14 mm	20 <b>0266500000</b>

<b>Marking systems</b>	(see assortment in catalogue 7)
	Marking tags

For detailed information on other accessories and applications, refer to the „Accessories“ section

WS 10/12



Distribution terminals for 10 x 3

In hazardous area applications, the installation instructions and the rated data specifications for accessories given in the technical appendix must be followed.

Width/Length/height with TS35x7.5	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>



Technical data

Rated data	
Rated voltage	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Gauge to IEC 60947-1 / UL94 Flammability class	
Approvals	
Clamped conductors (H05V/H07V)	
solid / stranded	mm <sup>2</sup>
flexible / Stranded wire with end ferrules	mm <sup>2</sup>
Twin wire-end ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-
<b>Note</b>	

Ordering data


Version	
	Dark beige Wemid
<b>Note</b>	

Accessories

Pluggable cross-connection	
	2-pole
	3-pole
	4-pole
	10-pole
End plate / partition	
	Dark beige Wemid
Mounting plate for 10 x 3 (required every 20 cm)	
	Blue Wemid
	For a vertical installation position
End bracket	
	Dark beige Wemid
Screwdriver	
	Standard
Busbar 10 x 3 (140 A)	
	OK, Busbar up to OK, TS35 = 25,5 mm
Clamping yoke for power supply to 10 x 3 busbars	
	Rigid / flexible 0,5 - 6 / 4 mm <sup>2</sup>
	rigid / flexible 6 - 16 mm <sup>2</sup>
	Flexible 16 - 35 mm <sup>2</sup>
Marking systems	
	(see assortment in catalogue 7)
	Marking tags
For detailed information on other accessories and applications, refer to the „Accessories“ section	

PDL4 S/NT/L/PE

4 mm<sup>2</sup>

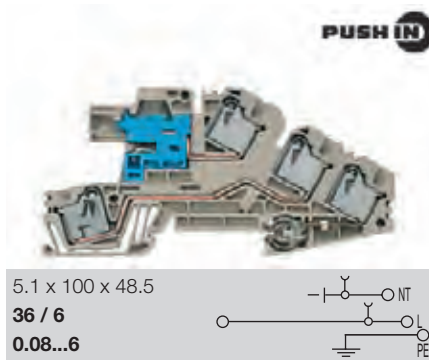

5.1 x 100 x 48.5
<b>36 / 6</b>
<b>0.08...6</b>


IEC 60947-7-1 (-7-2)		
IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	
Rated connection		
0.5...6 / 1.5...4		
0.5...4 / 0.5...4		
0.5...1.5		
12 / 3.0 x 0.5 mm		

Type	Qty	Order No.
PDL 4 S/NT/L/PE	50	1837060000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
Width			
PAP PDL4S	3 mm	20	1837070000
PHP PDL		20	1837090000
PHP PDL SO		20	1837080000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL	22 mm	50	1814660000
ZB 16 ZKSC	10 mm	50	0316600000
ZB 35/M6X16	14 mm	20	0266500000
Marking systems			
DEK 5/5			

PDL4 S/L/L

4 mm<sup>2</sup>

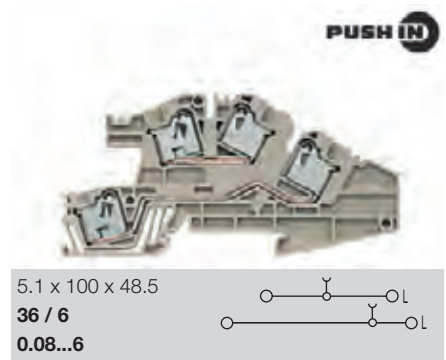

5.1 x 100 x 48.5
<b>36 / 6</b>
<b>0.08...6</b>

IEC 60947-7-1		
IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	
Rated connection		
0.5...6 / 1.5...4		
0.5...4 / 0.5...4		
0.5...1.5		
12 / 3.0 x 0.5 mm		

Type	Qty	Order No.
PDL 4 S/L/L	50	1837030000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
Width			
PAP PDL4S	3 mm	20	1837070000
PHP PDL		20	1837090000
PHP PDL SO		20	1837080000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL	22 mm	50	1814660000
ZB 16 ZKSC	10 mm	50	0316600000
ZB 35/M6X16	14 mm	20	0266500000
Marking systems			
DEK 5/5			

**Installation terminals**

**Distribution terminals for 10 x 3**

In hazardous area applications, the installation instructions and the rated data specifications for accessories given in the technical appendix must be followed.

Width/Length/height with TS35x7.5	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>



**Technical data**

Rated data	
Rated voltage	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Gauge to IEC 60947-1 / UL94 Flammability class	
Approvals	
Clamped conductors (H05V/H07V)	
solid / stranded	mm <sup>2</sup>
flexible / Stranded wire with end ferrules	mm <sup>2</sup>
Twin wire-end ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-
Note	

**Ordering data**

Version	Dark beige Wemid
Note	

**Accessories**

Pluggable cross-connection	
	2-pole 3-pole 4-pole 10-pole
End plate / partition	
	Dark beige Wemid
Mounting plate for 10 x 3 (required every 20 cm)	
	Blue Wemid For a vertical installation position
End bracket	
	Dark beige Wemid
Screwdriver	
	Standard
Busbar 10 x 3 (140 A)	
	OK, Busbar up to OK, TS35 = 25,5 mm
Clamping yoke for power supply to 10 x 3 busbars	
	Rigid / flexible 0,5 - 6 / 4 mm <sup>2</sup> rigid / flexible 6 - 16 mm <sup>2</sup> Flexible 16 - 35 mm <sup>2</sup>
Marking systems	
	(see assortment in catalogue 7) Marking tags
For detailed information on other accessories and applications, refer to the „Accessories“ section	

**PDL 4 S/L**

**4 mm<sup>2</sup>**



5.1 x 100 x 48.5
<b>36 / 6</b>
<b>0.08...6</b>

IEC 60947-7-1		
IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V0	
Rated connection		
0.5...6 / 1.5...4		
0.5...4 / 0.5...4		
0.5...1.5		
12 / 3.0 x 0.5 mm		
Can be used with ultrasonically welded conductors ranging from 0.5 ... 4 mm <sup>2</sup> .		

Type	Qty	Order No.
PDL 4 S/L	50	<b>1847610000</b>

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	<b>1608860000</b>
ZQV 2.5/3	24 A	60	<b>1608870000</b>
ZQV 2.5/4	24 A	60	<b>1608880000</b>
ZQV 2.5/10	24 A	20	<b>1608940000</b>
Width			
PAP PDL4S	3 mm	20	<b>1837070000</b>
PHP PDL		20	<b>1837090000</b>
PHP PDL SO		20	<b>1837080000</b>
ZEW 35/2	8 mm	20	<b>8630740000</b>
SDI 0,4x2,5x75		1	<b>9008370000</b>
SSCH 10X3X1000 CU/SN	10 mm	1	<b>0348900000</b>
ZF 4 S BL	22 mm	50	<b>1814660000</b>
ZB 16 ZKSC	10 mm	50	<b>0316600000</b>
ZB 35/M6X16	14 mm	20	<b>0266500000</b>

DEK 5/5
---------

**PDL4 S/N/L/PE**

**4 mm<sup>2</sup>**



5.1 x 100 x 48.5
<b>36 / 6</b>
<b>0.08...6</b>

IEC 60947-7-1 (-7-2)		
IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	
Rated connection		
0.5...6 / 1.5...4		
0.5...4 / 0.5...4		
0.5...1.5		
12 / 3.0 x 0.5 mm		

Type	Qty	Order No.
PDL 4 S/N/L/PE	50	<b>1837050000</b>

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	<b>1608860000</b>
ZQV 2.5/3	24 A	60	<b>1608870000</b>
ZQV 2.5/4	24 A	60	<b>1608880000</b>
ZQV 2.5/10	24 A	20	<b>1608940000</b>
Width			
PAP PDL4S	3 mm	20	<b>1837070000</b>
PHP PDL		20	<b>1837090000</b>
PHP PDL SO		20	<b>1837080000</b>
ZEW 35/2	8 mm	20	<b>8630740000</b>
SDI 0,4x2,5x75		1	<b>9008370000</b>
SSCH 10X3X1000 CU/SN	10 mm	1	<b>0348900000</b>
ZF 4 S BL	22 mm	50	<b>1814660000</b>
ZB 16 ZKSC	10 mm	50	<b>0316600000</b>
ZB 35/M6X16	14 mm	20	<b>0266500000</b>

DEK 5/5
---------




**PDL 4 S/N/L**

4 mm<sup>2</sup>



5.1 x 100 x 48.5  
**36 / 6**  
**0.08...6**



IEC 60947-7-1

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

KEP

**Rated connection**

0.5...6 / 1.5...4  
 0.5...4 / 0.5...4  
 0.5...1.5  
 12 / 3.0 x 0.5 mm

Type	Qty	Order No.
PDL 4 S/N/L	50	1847630000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
	Width		
PAP PDL4S	3 mm	20	1837070000
PHP PDL		20	1837090000
PHP PDL SO		20	1837080000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL	22 mm	50	1814660000
ZB 16 ZKSC	10 mm	50	0316600000
ZB 35/M6X16	14 mm	20	0266500000


DEK 5/5

**PDL 4 S/N**

4 mm<sup>2</sup>



5.1 x 100 x 48.5  
**36 / 6**  
**0.08...6**



IEC 60947-7-1

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

KEP

**Rated connection**

0.5...6 / 1.5...4  
 0.5...4 / 0.5...4  
 0.5...1.5  
 12 / 3.0 x 0.5 mm

Type	Qty	Order No.
PDL 4 S/N	50	1847620000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
	Width		
PAP PDL4S	3 mm	20	1837070000
PHP PDL		20	1837090000
PHP PDL SO		20	1837080000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL	22 mm	50	1814660000
ZB 16 ZKSC	10 mm	50	0316600000
ZB 35/M6X16	14 mm	20	0266500000


DEK 5/5

**PDL4 S/L/L/PE**

4 mm<sup>2</sup>



5.1 x 100 x 48.5  
**36 / 6**  
**0.08...6**



IEC 60947-7-1 (-7-2)

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

KEP

**Rated connection**

0.5...6 / 1.5...4  
 0.5...4 / 0.5...4  
 0.5...1.5  
 12 / 3.0 x 0.5 mm

Type	Qty	Order No.
PDL 4 S/L/L/PE	50	1837040000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
	Width		
PAP PDL4S	3 mm	20	1837070000
PHP PDL		20	1837090000
PHP PDL SO		20	1837080000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000
SSCH 10X3X1000 CU/SN	10 mm	1	0348900000
ZF 4 S BL	22 mm	50	1814660000
ZB 16 ZKSC	10 mm	50	0316600000
ZB 35/M6X16	14 mm	20	0266500000

DEK 5/5

**Installation terminals**

**Modular distribution terminals**

In hazardous area applications, the installation instructions and the rated data specifications for accessories given in the technical appendix must be followed.

Width/Length/height with TS35x7.5	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

**Technical data**

Rated data	
Rated voltage	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Gauge to IEC 60947-1 / UL94 Flammability class	
Approvals	


Clamped conductors (H05V/H07V)	
solid / stranded	mm <sup>2</sup>
flexible / Stranded wire with end ferrules	mm <sup>2</sup>
Twin wire-end ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

**Note**

**Ordering data**

Version	
	Dark beige Wemid
Note	

**Accessories**


Pluggable cross-connection	
	2-pole
	3-pole
	4-pole
	10-pole
End plate / partition	
	Dark beige Wemid
End bracket	
	Dark beige Wemid
Screwdriver	
	Standard

**Marking systems** (see assortment in catalogue 7)  
Marking tags

**For detailed information on other accessories and applications, refer to the „Accessories“ section**

**PDL4 NT/L/PE**

**4 mm<sup>2</sup>**

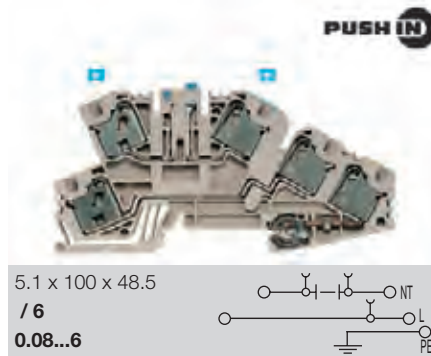

5.1 x 100 x 48.5  
/ 6  
**0.08...6**

IEC	UL	CSA
400	300	300
20	10	10
4	AWG 28...10	AWG 28...10
6 / 3		
A3 / V0		

Rated connection	
0.5...6 / 1.5...4	
0.5...4 / 0.5...4	
0.5...1.5	
12 / 3.0 x 0.5 mm	

**30A bottom level  
20A top level**


Type	Qty	Order No.
PDL 4/NT/L/PE	50	<b>1882620000</b>

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	<b>1608860000</b>
ZQV 2.5/3	24 A	60	<b>1608870000</b>
ZQV 2.5/4	24 A	60	<b>1608880000</b>
ZQV 2.5/10	24 A	20	<b>1608940000</b>
Width			
PAP PDL4	3 mm	20	<b>1883210000</b>
ZEW 35/2	8 mm	20	<b>8630740000</b>
SDI 0,4x2,5x75		1	<b>9008370000</b>

DEK 5/5

**PDL4 NT/L**

**4 mm<sup>2</sup>**

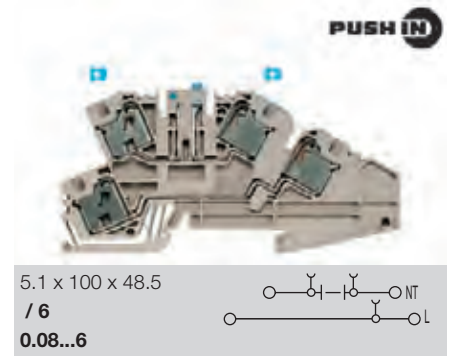

5.1 x 100 x 48.5  
/ 6  
**0.08...6**

IEC	UL	CSA
400	300	300
20	10	10
4	AWG 28...10	AWG 28...10
6 / 3		
A3 / V0		

Rated connection	
0.5...6 / 1.5...4	
0.5...4 / 0.5...4	
0.5...1.5	
12 / 3.0 x 0.5 mm	

**30A bottom level  
20A top level**

Type	Qty	Order No.
PDL 4/NT/L	50	<b>1882600000</b>

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	<b>1608860000</b>
ZQV 2.5/3	24 A	60	<b>1608870000</b>
ZQV 2.5/4	24 A	60	<b>1608880000</b>
ZQV 2.5/10	24 A	20	<b>1608940000</b>
Width			
PAP PDL4	3 mm	20	<b>1883210000</b>
ZEW 35/2	8 mm	20	<b>8630740000</b>
SDI 0,4x2,5x75		1	<b>9008370000</b>

DEK 5/5

**PDL4 N/L/PE**


4 mm<sup>2</sup>

**PDL4 L/L/PE**


4 mm<sup>2</sup>

**PDL4 L/L**


4 mm<sup>2</sup>

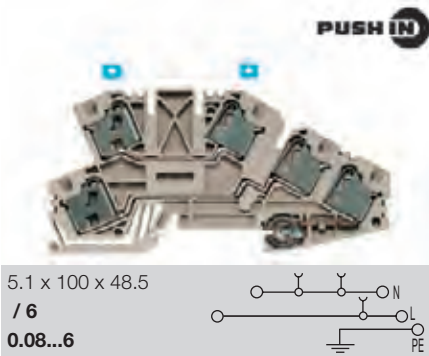

5.1 x 100 x 48.5  
/ 6  
0.08...6

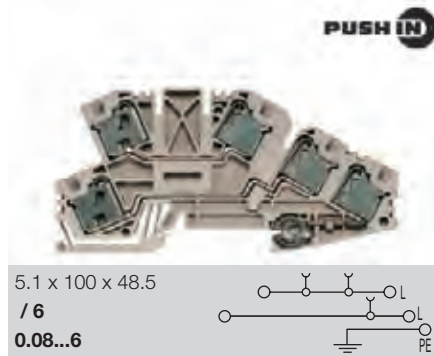

5.1 x 100 x 48.5  
/ 6  
0.08...6

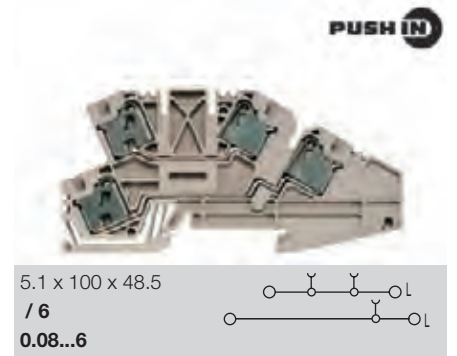

5.1 x 100 x 48.5  
/ 6  
0.08...6

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

**Rated connection**

0.5...6 / 1.5...4
0.5...4 / 0.5...4
0.5...1.5
12 / 3.0 x 0.5 mm

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

**Rated connection**

0.5...6 / 1.5...4
0.5...4 / 0.5...4
0.5...1.5
12 / 3.0 x 0.5 mm

IEC	UL	CSA
400		
32		
4		
	6 / 3	
	A3 / V-0	

**Rated connection**

0.5...6 / 1.5...4
0.5...4 / 0.5...4
0.5...1.5
12 / 3.0 x 0.5 mm

Type	Qty	Order No.
PDL 4/N/L/PE	50	1899180000

Type	Qty	Order No.
PDL 4/L/L/PE	50	1882610000

Type	Qty	Order No.
PDL 4/L/L	50	1882590000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
<b>Width</b>			
PAP PDL4	3 mm	20	1883210000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
<b>Width</b>			
PAP PDL4	3 mm	20	1883210000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000

Type	current	Qty	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/3	24 A	60	1608870000
ZQV 2.5/4	24 A	60	1608880000
ZQV 2.5/10	24 A	20	1608940000
<b>Width</b>			
PAP PDL4	3 mm	20	1883210000
ZEW 35/2	8 mm	20	8630740000
SDI 0,4x2,5x75		1	9008370000

DEK 5/5
---------

DEK 5/5
---------

DEK 5/5
---------