


Relay couplers - RIDERSERIES


**RCH Safety Relay
DC coil**

- Relay with positively driven contacts to EN 50205
- 2 CO contacts or 1 NOC + 1 NCC
- 1500 VA switching capacity
- 6 kV impulse withstand voltage

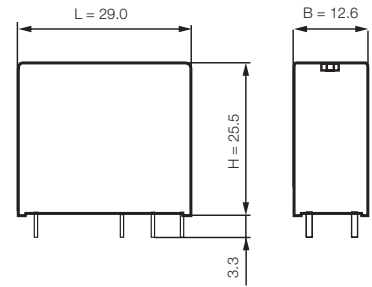


Circuit diagram
View of connections

2 changeover contacts



1 NOC + 1 NCC



Output

max. switching voltage AC	250 V
Continuous current	6 A
Contact base material	AgNi
Mechanical endurance	10x10 ⁶ switching cycles
Response time / Drop-out time	10 ms / 4 ms

Rated data

Status indicator/Free wheel diode	no/no
Operating temperature	-25 °C...+70 °C
Approvals	cURus;

Insulation coordination (IEC 60664)

Rated voltage	250 V
Creepage and clearance path input - output	8 mm
Overvoltage category	III
Pollution severity	2
Protective separation to VDE 0106 part 101	yes

Dimensions

Length x width x height	mm	29 / 12.6 / 25.5
-------------------------	----	------------------

Note

Ordering data

Input	12 V DC 1CO	24 V DC 1CO	12 V DC 1NC / 1NO	24 V DC 1NC / 1NO
Rated voltage	12 V DC	24 V DC	12 V DC	24 V DC
Rated current AC				
Rated current DC	58.3 mA	29.2 mA	58.3 mA	29.2 mA
Power rating	700 mW	700 mW	700 mW	700 mW
AC Response/dropout Volt				
DC Response/dropout Volt	9.0 V / 1.2 V	18.0 V / 2.4 V	9.0 V / 1.2 V	18.0 V / 2.4 V

Ordering data

NCC/NOC	Type			RCH S51012	RCH S51024
	Order No.			8768670000	8768700000
CO contact	Type	RCH S21012	RCH S21024		
	Order No.	8768660000	8768680000		

Ordering data

	Type				
	Order No.				

Note