

Screwdrivers

The proper tool is always required to make a secure connection.

The Weidmüller screwdriver assortment is the perfect solution; it features the ergonomic design and versatility required for demanding professional applications. Weidmüller safeguards your safety, health, comfort and efficiency with our ergonomic design.

In order to establish secure manual screw connections, all Weidmüller screwdrivers and manual torque screwdrivers feature a special handle geometry, slip protection, and a special SoftFinish® zone. These qualities enable optimal handling and ensure electrical safety and hand protection during even the most critical applications.

Weidmüller offers a wide variety of electric screwdrivers, standard bits and innovative quick-change holders – the perfect additions to the manual torque screwdriver. Weidmüller electric screwdrivers are the ideal tool for achieving a high level of repetitive accuracy. This accuracy is made possible by their ergonomic design and standard integrated automatic torque control.

Weidmüller also offers innovative solutions for special applications such as cable glands or the fastening of sensor cables.

F





Electric screwdrivers



F

Crimped conductors can be fastened in their corresponding connecting spaces either by the direct plug-in technique or by means of screws.

Electric screwdrivers / Weidmüller bits

Weidmüller **screwdrivers** are ideal one-hand tools due to their ergonomic design. They guarantee fatigue-free working in any installation direction. They also have an automatic torque limit and high repetition accuracy.

The Weidmüller **bits** are standard bits with high quality, wide range and top-rate performance. Weidmüller uses processor-controlled hardening processes to guarantee consistently high product quality.

The high-grade material enables torques far above those stipulated in the relevant DIN standards:

- DIN 5261 for PH/PZ bits
- DIN 5263 for slotted bits
- Camcar standard for TORX bits

This means long service life at high torques, producing ideal conditions for standard work.

Product benefits

- Suitable for all screw driving tasks
Ideal for both manual and machine screw driving tasks due to the high hardness values of 59 – 61 HRC
- Good wear resistance and therefore a long service life
- Optimum fit in DIN screws for low wear and optimum torque transmission
- Manufactured with consistently high product quality based on the relevant ISO standards

Rechargeable torque screwdriver

DMS 3

DMS 3 Set



DMS 3 rechargeable torque screwdriver

- One-hand operation under all working conditions
- Switchable forward and reverse
- Two speeds: 200 and 400 rpm
- Precise torque settings from approx. 0.2 ... 3 Nm in 6 steps
- Consistent performance during battery discharge
- Grip swings easily from rod to pistol form
- Takes 1/4" bits held ball-bearing clamping mechanism (form E6.3)
- Safety lock prevents inadvertent operation
- Easy changeover from battery drive to manual operation up to 15 Nm

Technical data

Screwdriver	
Motor	2.4 V DC
Idling speed	200/400 rpm
Max. torque	3.0 Nm
Chuck	1/4" E 6,3 DIN 3126
Length	239 mm
Weight	400 g
Battery	
Type	2 Ni-Cd batteries each 1.2 V
Weight	122 g
Charger	
Input	230 V AC, 50 Hz, 50 mA
Output	2.9 V AC, 1.4 A, 4.1 VA
Charging time	1 hour
Weight	700 g

Ordering data

Type	Qty.	Order No.
DMS 3	1	9007440000
Screwdriver incl. battery		

Type	Qty.	Order No.
DMS 3 set 1 (screwdriver incl. battery, charger, bits, plastic carrying case)	1	9007470000
DMS 3 set 2 (as set1 with 1 additional battery)	1	9007480000

*) see picture

Accessories

Type	Qty.	Order No.
Spare battery	1	9007450000
Charger	1	9007460000

Electric torque screwdriver

Electric torque screwdriver

DMS 2 Set



- Torque adjustable in four steps for standard screws M2.5 to M4
- Selectable electric power cut-off upon reaching a preselected torque
- High repetition accuracy
- Start-up in low gear and switchover to operating rpm is controlled via the pressure on the screw head
- Switchable forward and reverse
- Fatigue-free working due to ergonomic design and low weight
- Ideal design for one-hand operation under all working conditions and at different working locations
- Low noise
- Low energy consumption

Technical data

Rated voltage	230 V
Frequency	60 Hz
Rated power	45 W
Current consumption	0,2 A
rpm of spindle in search gear	350 min ⁻¹
in working mode	700 min ⁻¹
Torques	
Level 1 (M 2.5)	0.5 ± 0.1 Nm
Level 2 (M 3)	0.7 ± 0.15 Nm
Level 3 (M 3.5)	1.2 ± 0.2 Nm
Level 4 (M4)	1.7 ± 0.25 Nm
Weight incl. supply cable	0.990 kg
Weight	0.820 kg
Noise level to DIN 45 634	58 db (A)
Protection class II to DIN 57 740 DIN/VDE 0740 T.1 and T.2 EMC to EC directive 89/336/EWG CE mark	

Ordering data

Standard equipment	Type	Qty.	Order No.
	DMS 2 with 1/4" drive Form E 6.3 DIN 3126 with hang-up clip and 4 bits for slotted screws (Length: 50 mm) Blade dimensions 0.5 x 3 / 0.6 x 3.5 / 0.8 x 4 / 1.0 x 5.5	1	0664600000


Accessories

	Type	Qty.	Order No.
Balancer for hanging up the DMS 2	BAL 2 (balancer for hanging up the DMS 2)	1	0181800000




Bits drive 1/4 E6.3

1/4" hexagon drive, acc. to DIN 3126,
Shape E6.3 for direct machine connection



Bit E6.3 S


Slotted bits DIN 5264,
1/4" drive E6.3 DIN 3126



Type	Size / AF	A	B	C	Order No.
BIT E6,3 0,4x2,5x70		0.4	2.0	70	9202750000
BIT E6,3 0,5x3,0x50		0.5	3.0	50	9009410000
BIT E6,3 0,5x3,0x70		0.5	3.0	70	9204000000
BIT E6,3 0,5X3,0X110		0.5	3.0	110	9205600000
BIT E6,3 0,6x3,5x50		0.6	3.0	50	9009420000
BIT E6,3 0,6x3,5x70		0.6	3.0	70	9024020000
BIT E6,3 0.6X3.5X110		0.6	3.0	110	9205610000
BIT E6,3 0,8x4,0x50		0.8	4.0	50	9009430000
BIT E6,3 0,8x4,0x70		0.8	4.0	70	9024030000
BIT E6,3 0.8X4.0X110		0.8	4.0	110	9205620000
BIT E6,3 0.8X4.5X110		0.8	4.0	110	9205630000
BIT E6,3 1,0x5,5x50		1.0	5.5	50	9009440000
BIT E6,3 1,0x5,5x70		1.0	5.5	70	9024040000
BIT E6,3 1.0X5.5X110		1.0	5.0	110	9205640000
BIT E6,3 1,2x6,5x70		1.2	6.5	70	9202740000
BIT E6,3 1.2X6.5X110		1.2	6.0	110	9205650000

Bit E6.3 PH


Crosshead bits, Phillips-recess type PH/DIN 5260.
1/4" drive E6.3 DIN 3126



BIT E6,3 PH1x70	1			70	9024080000
BIT E6,3 PH2x70	2			70	9024090000

Bit E6.3 PZ


Crosshead bits, Pozidrive type PZ/DIN 5262,
1/4" drive E 6.3 DIN 3126



BIT E6,3 PZ1x70	1			70	9024100000
BIT E6,3 PZ2x70	2			70	9024110000

Bit E6.3 Z

Slotted bits with peg DIN 5264,
1/4" drive E6.3 DIN 3126




BIT E6,3 Z 0.6X3.5X39		0.6	3.0	39	9025570000
BIT E6,3Z 0.6X3.5X70		0.6	3.0	70	9205670000
BIT E6,3 Z 0.8X4.0X39		0.8	4.0	39	9025590000
BIT E6,3Z 0.8X4.0X70		0.8	4.0	70	9205660000

Bits

Bits drive 1/4 E6.3

1/4" hexagon drive, acc. to DIN 3126,
Shape E6.3 for direct machine connection



Bit box DMS3

Weidmüller Bit Box, 9-piece with universal holder
drive: 1/4" E6.3 DIN 3126; output: 1/4" E6.3; bits: 1/4" C6.3



Type	Size / AF	A	B	C	Order No.
UBH 1/4" E6,3					
BIT C6,3 0,5x4,0x25		0.5	4.0	25	
Bit C6,3 0,6x4,5x25		0.6	4.5	25	
BIT C6,3 PH0x25	0			25	
BIT C6,3 PH1x25	1			25	
BIT C6,3 PH2x25	2			25	
BIT C6,3 PZ0x25	0			25	
BIT C6,3 PZ1x25	1			25	
BIT C6,3 PZ2x25	2			25	
Bit-Box WI DMS 3				25	9024970000

UBH 1/4 E6.3

Short universal bit holder, magnetic
drive: 1/4" E6.3 DIN 3126, output: 1/4" E6.3



UBH 1/4 E6,3	9009520000
--------------	------------

F

UBH SWH 1/4

Universal quick-change holder with locking function and magnet.
True one-hand operation for quick bit changes
1/4" drive: E6.3 DIN 3126, output: 1/4" E6.3



UBH SWH 1/4	9009510000
-------------	------------

UBH SWH 1/4 EC 6.3

Universal quick-change holder with locking function. True one-hand
operation for quick bit changes Drive: 1/4" E6.3 DIN 3126, output:
1/4" E6.3 + C6.3 double bits



UBH SWH 1/4 EC 6.3	9205680000
--------------------	------------

DMS manual / DMSI manual

Torque screwdrivers with insulation up to 1000 V (VDE) DMSI manual

The “DMSI manual” with integral window scale combined with a Weidmüller 1000 V insulated (VDE) interchangeable blade ensures controlled tightening of screws plus reliability in electrical applications.

Every 1000 V insulated handle (VDE) and blade (VDE) is tested and provides the necessary safety up to 1000 V AC/1500 V DC.



Torque screwdrivers DMS manual

This is a versatile tool suitable for a variety of jobs, with integral scale for easy reading of the torque value plus a Weidmüller interchangeable blade.



Scale



Each model is available with two torque ranges:

- 0.5 to 1.7 Nm
- 2.0 to 8.0 Nm
- setting tool included

Advantages:


- Compact and especially lightweight design
- Torque set with special tool (included) to ensure the right setting
- Ergonomic handle size to match the torque range
- Every tool checked and given an ID No., 100% quality control with verification and product reference
- Audible, unmistakable click upon reaching the torque, no unnecessary effort
- Interchangeable blade made from high-quality wear-resistant tool steel
- All tools comply with the accuracy stipulations of: EN ISO 6798, BS EN 26789, ASME B107.14M
- Operating accuracy: $\pm 6\%$ of set scale value



Setting tool

Uninsulated torque screwdriver

Uninsulated torque screwdriver



DMS manual

Torque screwdriver
EN ISO 6798, BS EN 26789, ASME B107.14M



Type	Size / AF	A	B	C	Order No.
DMS MANUAL 0.5-1.7	0.5 - 1.7 Nm				9918370000
DMS MANUAL 2.0-8.0	2.0 - 8.0 Nm				9918380000

WK K S

Interchangeable bits for torque screwdriver
output acc. to DIN 5264, ISO 2380/1



WK S 0,4x2,5	max. 0.4 Nm	0.4	2.5	175	9918520000
WK S 0,5x3,0	Max. 0.6 Nm	0.5	3.0	175	9918530000
WK S 0,6x3,5	Max. 1.1 Nm	0.6	3.5	175	9918540000
WK S 0,8x4,0	Max. 2.5 Nm	0.8	4.0	175	9918550000
WK S 1,0x5,5	Max. 3.8 Nm	1.0	5.5	175	9918560000

WK K PZ

Interchangeable bits for torque screwdriver
output acc. to DIN 5260-PZ, ISO 8764/1-PZ



WK K PZ0	Max. 9 Nm			175	9918600000
WK K PZ1	Max. 3.8 Nm			175	9918610000
WK K PZ2	Max. 5.5 Nm			175	9918620000

WK K PH

Interchangeable bits for torque screwdriver
output acc. to DIN 5260-PH, ISO 8764/1-PH



WK K PH0	Max. 9 Nm			175	9918570000
WK K PH1	Max. 3.8 Nm			175	9918580000
WK K PH2	Max. 5.5 Nm			175	9918590000


WGK 1/4 C6.3 E6.3

Interchangeable bit with bit holder for torque screwdrivers
Drive: 1/4" C6.3 and 1/4" E6.3



WK 1/4" C6,3 E6,3					9202510000
-------------------	--	--	--	--	------------

VDE-insulated torque screwdriver



DMSI manual

VDE-insulated torque screwdriver
EN ISO 6798, BS EN 26789, ASME B107.14M



Type	Size / AF	A	B	C	Order No.
DMSI MANUAL 0.5-1.7	0.5 - 1.7 Nm				9918390000
DMSI MANUAL 2.0-8.0	2.0 - 8.0 Nm				9918400000

WK SI

VDE-insulated interchangeable bits for VDE-insulated torque screwdriver; output acc. to DIN 5264, ISO 2380/1



WK SI 0,4x2,5	max. 0.4 Nm	0.4	2.5	200	9918410000
WK SI 0,5x3,0	Max. 0.6 Nm	0.5	3.0	200	9918420000
WK SI 0,6x3,5	Max. 1.1 Nm	0.6	3.5	200	9918430000
WK SI 0,8x4,0	Max. 2.5 Nm	0.8	4.0	200	9918440000
WK SI 1,0x5,5	Max. 3.8 Nm	1.0	5.5	200	9918450000

WK IK PH

VDE-insulated interchangeable bits for VDE-insulated torque screwdriver; output acc. to DIN 5260-PH, ISO 8764/1-PH



WK IK PH0	Max. 9 Nm			200	9918460000
WK IK PH1	Max. 3.8 Nm			200	9918470000
WK IK PH2	Max. 5.5 Nm			200	9918480000

WK IK PZ

VDE-insulated interchangeable bits for VDE-insulated torque screwdriver; output acc. to DIN 5260-PZ, ISO 8764/1-PZ



WK IK PZ0	Max. 9 Nm			200	9918490000
WK IK PZ1	Max. 3.8 Nm			200	9918500000
WK IK PZ2	Max. 5.5 Nm			200	9918510000

Screwty for M8/M12 / M23



The perfect tool for all situations

Screwty is the ideal, universal tool for tightening and releasing cable glands on all common sensor and actuator cables. The Screwty can also reach those round plugs normally considered inaccessible! No great force is required – simply turn the tool to tighten or release the plug-in connector as required.


The Screwty also fits the majority (more than 90 %) of the cables and plug-in connectors of other suppliers and is therefore a unique tool useful throughout the world. The Screwty consists of a handle with a conventional 1/4" fitting. This means it can be used for all sizes: for M12 and M8 round plugs, and the M12F and M8F types, also for plugs and sockets on custom cables.

The Screwty is suitable for the following round plugs:

Size	M8	M8 F	M12	M12 F
	10 ±0,3 mm	11,9 ±0,3 mm	14,5 ±0,3 mm	19,8 ±0,3 mm
Thread	M8x1	M8x1	M12x1	M12x1

An adjustable torque fitting is also available for the Screwty – for guaranteeing extra reliability during installation.

The torque can be infinitely adjusted between 0.5 and 1.7 Nm. This accurate setting enables all round plugs to be tightened precisely with a certain torque.

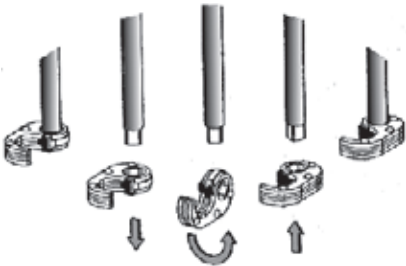

Weidmüller specifies the following torques for its round plugs:

Size	M8	M8 F	M12	M12 F
Torque	0,5-0,6 Nm	0,5-0,6 Nm	0,8-1,0 Nm	0,8-1,0 Nm
Thread	M8x1	M8x1	M12x1	M12x1

Simply turn the ratchet to tighten or loosen the cable gland.

The Screwty can also be fitted with other blades to create a torque screwdriver. You can find these blades on the following pages.



Use of a M12 Screwty

1. Position Screwty,
2. tighten connector,
3. finished!



Use of a M23 Screwty

Screwty standard



Screwty interchangeable handle/interchangeable bit



Torque handle

Setting aid for Screwty with torque fitting (included)



Screwty attachments



Screwty Set



Screwty Set-DM



Ordering data

Type	Use	Qty.	Order No.
Screwty M12	moulded M12 lines	1	1900000000
Screwty M8	moulded M8 lines	1	1900010000
Screwty M12 F	M12 plugs for custom assembly	1	1900020000
Screwty M8 F	M8 plugs for custom assembly	1	1900030000
Screwty M23	moulded M23 lines	1	1981560000

Type	Use	Qty.	Order No.
1/4" handle		1	4294820000
WK-1/4" (Screwty)		1	1862200000

Type	Use	Qty.	Order No.
Screwty-M12-DM	moulded M12 lines with torque requirement	1	1900001000
Screwty-M8-DM	moulded M8 lines with torque requirement	1	1900011000
Screwty-M12 F-DM	M12 plugs, custom assembly w. torque requirement	1	1900021000
Screwty-M8 F-DM	M8 plugs, custom assembly with torque requirement	1	1900031000

Fittings	
Type	Contents
Screwty-M12-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty torque, 1 Screwty M12 attachment
Screwty-M8-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty torque, 1 Screwty M18 attachment
Screwty-M12 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty torque, 1 Screwty M12 F attachment
Screwty-M8 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty torque, 1 Screwty M18 F attachment

Type	Qty.	Order No.
Screwty M12 KO or SD	1	1900100000
Screwty M8 KO or SD	1	1900110000
Screwty M12F KO or SD	1	1900120000
Screwty M8F KO or SD	1	1900130000
Screwty M23 LS	1	1981570000

Type	Qty.	Order No.
Screwty Set	1	1910000000

Fittings	
Type	Contents
Screwty Set	1 Screwty standard handle + 1 M12, M8, M12 F, M8 F attachments

Type	Qty.	Order No.
Screwty Set-DM	1	1920000000

Fittings	
Type	Contents
Screwty Set-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty torque, 1 each of Screwty M12, M8, M12 F, M8 F attachments

Legend:	
F	for custom assemblies
DM	torque
KO or SD	ratchet only (attachment)
Screwty	screwdriver
Screwty DM	torque screwdriver, interchangeable blade
WK	interchangeable blade

Cable gland tools

Cable gland tools

Screwing tool for all types of cable glands

- Can tighten or loosen several rows of cable glands
- No deforming of the cable glands

FleCaFix 11/24

Cable gland tool



- Spanner size: 11 to 24 AF
- Infinite adjustment of spanner size
- Ratchet function: not necessary to remove tool between turns
- Authentic one-hand tool

FleCaFix 24/36

Cable gland tool



- Spanner size: 24 to 36 AF
- Infinite adjustment of spanner size
- Ratchet function: not necessary to remove tool between turns
- Authentic one-hand tool

F



Technical data

Tool data			
Length / Width / Height	mm	190 / 30 / 60	204 / 30 / 60
Weight	g	190	240
Distance across flats (AF)	mm	11.0...24.0	24.0...36.0
Note			

Ordering data

Version	Type	Qty	Order No.	Type	Qty	Order No.
	FLECAFIX 11/24	1	9015900000	FLECAFIX 24/36	1	9015980000

Note		

Combined cutting and screw driving tool

That does not damage the edge; for cutting of copper cables.

- Solid with a diameter of up to 1.5 mm²
- Flexible with a diameter of up to 2.5 mm²

swifty®



swifty®

- Cable cutting tool to mount on non-insulated screw drivers with a blade diameter of 3.5 mm
- Minimum manual force required
- Automatic opening of the cutter
- Ergonomically designed grip

swifty®set

- Efficient operation:
- Only one tool for cable-processing in IDC-technology
- Suitable for screw and tension clamps
- Readily available pocket size
- For right-handed and left-handed use
- One-hand operation

swifty®set



Technical data

Maximum cutting capacity		
Copper cable:		
Solid cable (conductor cross-section)	mm ²	1.5
Flexible cable (conductor cross-section)	mm ²	2.5
Tool data		
Length x width x height	mm	35 / 18 / 40
Weight	g	20

Ordering data

Type	Qty.	Order No.
swifty® (without screwdriver)	1	9006020000

Type	Qty.	Order No.
swifty®set (with screwdriver)	1	9006060000
Screwdriver (SD 0.6x3.5x100)	1	9008330000

Screwdrivers

Weidmüller screwdrivers come in four different grip sizes, and are the result of a consistent grip concept which takes into account both the human hand and the different requirements when working.

- Perfect handling with all grip sizes
- Maximum torques
- Optimum transmission of axial force
- Complete range including all commercial sizes



SoftFinish grip



Weidmüller's SoftFinish grip zone for use in dry conditions and for general applications offers customers a complete range of screwdrivers that enables far higher torques as well as substantially more comfort due to the soft material of the grip.

Product benefits:

- Made of special soft material which is kind to the skin, the SoftFinish zone enables maximum torques
- Perfect ergonomic grip design for comfortable screw driving and optimum handling
- You can choose from long-life extremely stressable blades in standard sizes
- ChromTop blade tip offers maximum corrosion protection and greatest possible dimensional accuracy of the blade geometry in the screw head over many years

SoftFinish electric




VDE-insulated screwdriver according to DIN EN 60900, IEC 900 for work on live equipment

Product benefits:

- The protective insulation moulded directly on the screwdriver blade ensures electrical safety, even in critical applications
- Safe for working at up to 1500 volts DC and 1000 volts AC
- Each screwdriver is individually tested in a water bath at 10,000 volts according to DIN EN 60900
- Perfect ergonomic grip design for comfortable screw driving and optimum handling
- Made of special soft material which is kind to the skin, the SoftFinish zone prevents slipping in critical situations and at the same time enables maximum torques

VDE-insulated screwdriver

VDE-insulated screwdriver, for working on live parts up to 1000 VAC and 1500 VDC. DIN EN 60900, IEC 900, Safety tested „GS“, each piece tested. Bit made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.



SDI S

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip



Type	Size / AF	A	B	C	Order No.
SDI 0,4X2,0X60		0.4	2.0	60	9205690000
SDI 0,4x2,5x75		0.4	2.5	75	9008370000
SDI 0,5x3,0x100		0.5	3.0	100	9008380000
SDI 0,6x3,5x100		0.6	3.5	100	9008390000
SDI 0,8x4,0x100		0.8	4.0	100	9008400000
SDI 1,0x4,5x125		1.0	4.0	125	9008910000
SDI 1,0X4,5X175		1.0	4.0	175	9205700000
SDI 1,0x5,5x125		1.0	5.5	125	9008410000
SDI 1,0X5,5X175		1.0	5.0	175	9205710000
SDI 1,2x6,5x150		1.2	6.5	150	9008420000
SDI 1,6x8,0x175		1.6	8.0	175	9008430000

SDIK PH

VDE-insulated crosshead screwdriver, Phillips type, SDIK PH DIN 7438, ISO 8764/2-PH, output acc. to ISO 8764-PH, SoftFinish grip



SDIK PH0	0	60	9008560000
SDIK PH1	1	80	9008570000
SDIK PH2	2	100	9008580000
SDIK PH3	3	150	9008590000

SDIK PZ

VDE-insulated crosshead screwdriver Pozidrive type, SDIK PZ DIN 7438, ISO 8764/2-PZ, output acc. to ISO 8764-PZ, SoftFinish grip



SDIK PZ1	1	80	9008900000
SDIK PZ2	2	100	9008890000

SDIT

VDE insulated Torx®-screwdriver, SDIT, SoftFinish grip



SDI T8	8	60	9201940000
SDI T10	10	80	9009640000
SDI T15	15	80	9009650000
SDI T20	20	80	9009660000
SDI T25	25	80	9009670000
SDI T30	30	100	9009680000
SDI T40	40	150	9009690000

SKI

VDE insulated hexagon socket wrench, ISK SoftFinish grip




SKI 5,0x125	5	125	9009000000
SKI 5,5x125	5.5	125	9008990000
SKI 6,0x125	6	125	9008980000
SKI 7,0x125	7	125	9008970000
SKI 8,0x125	8	125	9008960000
SKI 9,0x125	9	125	9008950000
SKI 10,0x125	10	125	9008940000
SKI 11,0x125	11	125	9008930000
SKI 13,0x125	13	125	9008920000

VDE-insulated screwdriver

VDE-insulated screwdriver

VDE-insulated screwdriver with pilot tip, for working on live parts up to 1000 VAC and 1500 VDC, DIN EN 60900, IEC 900, Safety tested „GS“, each piece tested. Bit made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.



Type	Size / AF	A	B	C	Order No.
SDIZ 0.6x3.5x100		0.6	3.5	100	9008450000
SDIZ 0.8x4.0x100		0.8	4.0	100	9008460000

SDIZ

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip



SDIS 2.5-5.5/PH/1/2

6-part set: VDE insulated slotted and crosshead PH screwdriver set



SDI 0,4x2,5x75		0.4	2.5	80	
SDI 0,5x3,0x100		0.5	3.0	100	
SDI 0,8x4,0x100		0.8	4.0	100	
SDI 1,0x5,5x125		1.0	5.5	125	
SDI PH 1	1			80	
SDI PH 2	2			100	
SDIS 2,5-5,5/PH1/2					9009730000

SDI T8-30

6-part set: VDE insulated TORX® screwdriver set



SDIT 8	8			60	
SDIT 10	10			80	
SDIT 15	15			80	
SDIT 20	20			80	
SDIT 25	25			80	
SDIT 30	30			100	
SDIS T8-30					9201950000

VDE-insulated screwdriver

Weidmüller SoftFinish VDE-insulated electric screwdriver for working on live components with up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Safety tested „GS“; each product tested.

SDIS 2.0-5.5

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip




Type	Size / AF	A	B	C	Order No.
SDI 0,4x2,0x60		0.4	2.0	60	
SDI 0,4x2,5x75		0.4	2.5	75	
SDI 0,5x3,0x100		0.5	3.0	100	
SDI 0,6x3,5x100		0.6	3.5	100	
SDI 0,8x4,0x100		0.8	4.0	100	
SDI 1,0x5,5x125		1.0	5.5	125	
SDIS 2.0-5.5					9205550000

Uninsulated screwdriver

Uninsulated screwdriver

Weidmüller SoftFinish screwdriver for general uses, blade made from fully hardened.

High-alloy chromium-vanadium-molybdenum steel, matt chrome finish.



SD S

Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip



Type	Size / AF	A	B	C	Order No.
SD 0.4x2.0x60		0.4	2.0	60	9037160000
SD 0.4x2.5x75		0.4	2.5	75	9009030000
SD 0.5x3.0x80		0.5	3.0	80	9008320000
SD 0.6x3.5x100		0.6	3.5	100	9008330000
SD 0.6x3.5x200		0.6	3.5	200	9010110000
SD 0.8x4.0x100		0.8	4.0	100	9008340000
SD 0.8x4.5x125		0.8	4.5	125	9009020000
SD 1.0x5.5x150		1.0	5.5	150	9008350000
SD 1.2x6.5x150		1.2	6.5	150	9009010000

SDK PH

Crosshead screwdriver, Phillips, SDK PH DIN 5262, ISO 8764/2-PH, output to ISO 8764-PH, ChromTop tip, SoftFinish grip



SDK PH0	0			60	9008470000
SDK PH1	1			80	9008480000
SDK PH2	2			100	9008490000
SDK PH3	3			150	9008500000

SDK PZ

Crosshead screwdriver, Pozidriv, SDK PZ DIN 5262, ISO 8764/2-PZ, output to ISO 8764/1-PZ, ChromTop tip, SoftFinish grip



SDK PZ0	0			60	9008520000
SDK PZ1	1			80	9008530000
SDK PZ2	2			100	9008540000
SDK PZ3	3			150	9008550000

SD TH

Torx® TH screwdriver with hole in tip of blade (tamper-resistant), SD TH for screwing Torx® and Torx®-TH security screws (pin in centre of Torx recess), ChromTop tip, SoftFinish grip



SD TH8	8			60	9009190000
SD TH10	10			80	9009180000
SD TH15	15			80	9009170000
SD TH20	20			100	9009160000
SD TH25	25			100	9009150000
SD TH30	30			115	9009140000

SK

Hexagon socket wrench SK DIN 3125, output to DIN 3125, SoftFinish grip




SK 5,5x125	5.5			125	9009120000
SK 6,0x125	6			125	9009110000
SK 7,0x125	7			125	9009100000
SK 8,0x125	8			125	9009090000
SK 9,0x125	9			125	9009080000
SK 10,0x125	10			125	9009070000
SK 11,0x125	11			125	9009060000
SK 12,0x125	12			125	9009050000
SK 13,0x125	13			125	9009040000

Uninsulated screwdriver

Weidmüller SoftFinish screwdriver for general uses, blade made from fully hardened.

High-alloy chromium-vanadium-molybdenum steel, matt chrome finish.



System 11+1 S-PH-PZ-SK

12-part set of interchangeable blades for slotted head, crosshead PH/PZ and hexagon screws, SoftFinish grip



Type	Size / AF	A	B	C	Order No.
SD		0.5	3.0	140	
SD		0.8	4.0	140	
SD		1.0	5.0	140	
SD		1.2	6.0	140	
PH 1	1			140	
PH 2	2			140	
PZ 1	1			140	
PZ 2	2			140	
SK	3			140	
SK	4			140	
SK	5			140	
SYSTEM 11+1				140	9009750000

System 11+1 TW-TS-TH

12-piece set of interchangeable bits for Torx®TH, Torq® and Tri-Wing® tamper-proof screws



TH	10			140	
TH	15			140	
TH	20			140	
TH	25			140	
TH	30			140	
TS	6			140	
TS	8			140	
TW	1			140	
TW	2			140	
TW	3			140	
TW	4			140	
SYSTEM 11+1 SECUR				140	9009760000

SD STK

Slotted screwdriver with solid steel cap SD STK DIN 5265, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. Solid steel cap also can be used as a chisel. SoftFinish grip



SD STK 8x150	1.2	8.0	150	9009700000
SD STK 10x175	1.6	10.0	175	9009710000

Set S 2.5/3.0/4.0/5.5/PH 1/2

6-part set: slotted and crosshead PH screwdriver set with circular blades




SD 0,4x2,5x75	0.4	2.5	75	
SD 0,5x3,0x80	0.5	3.0	80	
SD 0,8x4,0x100	0.8	4.0	100	
SD 1,0x5,5x150	1.0	5.5	150	
SD PH 1	1		80	
SD PH 2	2		100	
SDS 2,5-5,5/PH1/2				9009740000

Uninsulated screwdriver

Uninsulated screwdriver

Weidmüller SoftFinish screwdriver for general uses, blade made from fully hardened.

High-alloy chromium-vanadium-molybdenum steel, matt chrome finish.



Set TH 10/15/20/25/30/40

6-part set: Torx® screw driver with hole in the blade point



Type	Size / AF	A	B	C	Order No.
SD TH 8	8			60	
SD TH 10	10			80	
SD TH 15	15			80	
SD TH 20	20			100	
SD TH 25	25			100	
SD TH 30	30			150	
SDS TH8-30					9009720000

F

Set S 2.0/2.5/3.0/3.5/4.0/5.5

Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip



SD 0,4x2,0x60	0.4	2.0	60	
SD 0,4x2,5x75	0.4	2.5	75	
SD 0,5x3,0x80	0.5	3.0	80	
SD 0,6x3,5x100	0.6	3.5	100	
SD 0,8x4,0x100	0.8	4.0	100	
SD 1,0x5,5x150	1.0	5.5	150	
SDS 2.0-5.5				9205560000

Weidmüller wrench set

Allen key made from fully hardened, high-alloy chromium-vanadium steel, produced acc. to DIN ISO 2936 L (DIN 911), high-quality refined surface.

SK WSD S

9-piece offset screwdriver set in Prostar holder, with MagicRing: holds standard screws (size 3 and larger) in any position thanks to spring steel ring, with **ball point:** for working at angles up to 25°.



Type	Size / AF	A	B	C	Order No.
	1,5				
	2				
	2,5				
	3				
	4				
	5				
	6				
	8				
	10				
SK WSD-S 1,5-10,0					9008850000

SK S

7-piece Allen key set



	2				
	2,5				
	3				
	4				
	5				
	6				
	8				
SKS 2,0-8,0					9008860000

SK S

7-piece Allen key set with MagicRing and ball point: holds standard screws (size 3 and larger) in any position thanks to spring steel ring, with ball point: for working at angles up to 25°.



	2				
	2,5				
	3				
	4				
	5				
	6				
	8				
SKS 2,0-8,0 MR					9008870000

TH S

8-piece Torx®-TH screwdriver set with hole in the blade point (tamper-proof), for screwing Torx® and Torx®-TH tamper-proof screws (centre pin in profile)



	9				
	10				
	15				
	20				
	25				
	27				
	30				
	40				
TH-S 9-40					9008880000

Pin and electrical cabinet key

IS 4 / IS 6 / IS 8

Wrench with pegged pilot tip

Hexagon screwdriver with cross-grip made from high-quality plastics

- Surface nickel-plated
- Made from hardened chromium-vanadium steel
- According to DIN 6911
- Designed for screws acc. to DIN 6912

Ordering data

Type	Qty	Order No.
IS 4 DIN 6911	1	0485100000
IS 6 DIN 6911	1	0407900000
IS 8 DIN 6911	1	0235000000

Technical data

Blade length (C)	60 mm / 80 mm / 90 mm
Weight	34 g



IS 2 KG / IS 3 KG / IS 4 KG

Socket wrench

Hexagon screwdriver with cross-grip made from high-quality plastics

- Surface nickel-plated
- Made from hardened chromium-vanadium steel
- According to DIN 6911
- Designed for screws acc. to DIN 6912

Ordering data

Type	Qty	Order No.
IS 2 KG	1	1806630000
IS 3 KG	1	1806650000
IS 4 KG	1	1806660000

Technical data

Blade length (C)	100 mm
Weight	26 g



F

Cross-Key Master


Universal key

- With bit holder and reversible bit (drives - refer to symbols)
- Material: die cast zinc
- Dimensions: 62 x 90 mm
- **Applications:**

For almost all commercial locking systems in buildings including: doors, window handles, radiator bleed valves, sanitary installations, HVAC, gas and water supply.

Ordering data

Type	Qty	Order No.
CROSS-KEY MASTER	1	9918150000



Cross-Key Universal


Universal electrical cabinet key

- With bit holder and reversible bit (drives - refer to symbols)
- Material: die cast zinc
- Dimensions: 72 x 72 mm
- **Applications:**

For locking systems used in electrical engineering, fits all standard electrical cabinet locks.

Ordering data

Type	Qty	Order No.
CROSS-KEY UNIVERSAL	1	9918130000



Cross-Key Universal S

Universal mini electrical cabinet key

- With bit holder and reversible bit (drives - refer to symbols)
- Material: die cast zinc
- Dimensions: 42 x 42 mm
- **Applications:**

For locking systems used in electrical engineering, fits all standard electrical cabinet locks.

Ordering data

Type	Qty	Order No.
CROSS-KEY UNIVERSAL S	1	9918140000

