


**JACKPAC® test**

**Test adapter**

The new JACKPAC® test adapter now provides a simple way of intervening in an M12 network. It can be integrated at any point and enables quick and easy connection of a testing device via the 5 PUSH IN connections. Status indicators show the status of the 2 signal channels as well as the 24 VDC auxiliary voltage.

**JP TEST**

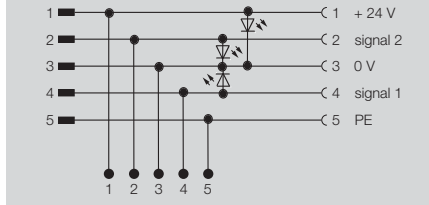

**Technical data**

**Input**

Rated control voltage  
Rated current DC  
Status indicator

18...24...30 V DC  
2.2 mA (LED)  
Green LED

**Output**

Continuous current power

2 A

**General data**

operating temperature  
Storage temperature  
Conductor connection system

0 °C...+55 °C  
-25 °C...+70 °C  
M12 plug / socket, A-coded

**Dimensions**

Clamping range (nominal / min. / max.) mm<sup>2</sup>  
Length x width x height mm

83 / 36 / 14.4

**Note**

**Ordering data**

**Connection system**

Type	Qty.	Order No.
JP TEST	1	8794120000

**Note**

**Accessories**

Retaining clip  
JP CLIP M: 8778490000