

## DT Cover with Hinged Transparent Door

### Features

- 5 sizes ranging from 11.88" x 7.32" to 11.88" x 23.78"
- Cabinet material: Halogen-free, hot molded, self-extinguishing, fiber-glass reinforced polyester
- Clear transparent polycarbonate hinged cover is temperature resistant to 248° F
- Mounts to any surface and maintains ratings up to NEMA 4X
- Maintenance free and corrosion resistant
- Seamless, polyurethane gasket in molded door edge channel
- Non-metallic enclosure corner screws
- Optional Depth Extensions are available

### Standards

- IEC 60439-1 • IEC 60529
- EN 60439-1 • EN 60529
- EN 50298

### Approvals

- UL Listed types: 3, 3R, 4, 4X, 12 & 13 per UL 508
- CSA Listed types: 2, 3, 3R, 4, 4X, 12 & 13
- Lloyds of London
- CE Marking



### Applications

Exclusive to Vynckier, DT Cover is an accessory product that allows full view of instrumentation, while protecting the system's monitors, push-buttons, etc. The hinged transparent door allows full access to components and controls when needed, without constant exposure to the outside environment.

Customers benefit from reduced system costs, since instruments and components are enclosed and don't require high protection standards.

# Vynckier Enclosure Systems, Inc.




DT Cover is ideal for conditions that require access to operation controls and instruments. Customers benefit from reduced instrument maintenance and replacement costs, since components are protected from corrosive environments including dust, moisture, chemicals, and residue from equipment washdowns.

- Window is impact and corrosion resistant clear polycarbonate with two non-metallic screws.
- Window Frame is rugged, corrosion resistant FRP
- Hinges are corner-mounted, wing type stainless steel



UL Recognized Product which allows customer to submit entire application for UL Listing of product.

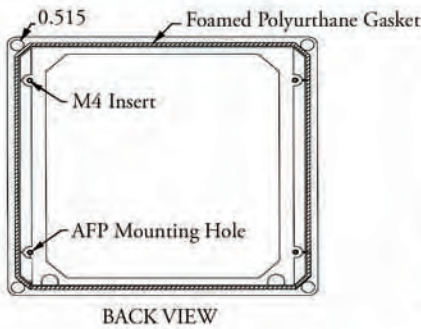

BACK VIEW



TOP VIEW

SIDE VIEW

FRONT VIEW



Catalog Number	Outside Dimensions			Inside Dimensions			Weight lb.
	H	W	D	H	W	D	
A31-DT COVER (mm)	11.88 (302)	7.32 (186)	1.77 (45)	10.25 (260)	4.32 (109)	1.65 (42)	2.05
A41-DT COVER (mm)	11.88 (302)	11.88 (302)	1.77 (45)	10.25 (260)	8.84 (224)	1.65 (42)	2.27
A71-DT COVER (mm)	11.88 (302)	14.68 (372)	1.77 (45)	10.25 (260)	11.60 (294)	1.65 (42)	3.13
A51-DT COVER (mm)	11.88 (302)	19.2 (488)	1.77 (45)	10.25 (260)	16.12 (409)	1.65 (42)	3.55
A61-DT COVER (mm)	11.88 (302)	23.72 (604)	1.77 (45)	10.25 (260)	20.62 (523)	1.65 (42)	4.55